

SUITABLE FOR MODEL



SAFETY INSTRUCTION

READ CAREFULLY BEFORE INSTALLING FIXTURE. PLEASE KEEP THIS MANUAL FOR FUTURE USE.

Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. MAKE CERTAIN POWER IS OFF BEFORE INSTALLING OR MAINTAINING FIXTURE.

CHECK THAT VOLTAGE IS COMPATIBLE WITH FIXTURE DRIVER. USE APPROVED CONNECTORS FOR ALL ELECTRICAL CONNECTIONS.

MAINTENANCE CAUTION

1. Review the wire connection before beginning, and make sure fixture is grounded properly.
2. For lighting controls, follow control instructions carefully.
3. Turn power off and wait for fixture to cool before performing maintenance.
4. Maintenance must be done by professionals.

WIRE CONNECTION

Universal voltage driver permits operation at 120VAC thru 277VAC, 50 or 60 Hz.

1. Connect the black fixture lead to the LINE supply lead.
2. Connect the White fixture lead to the COMMON supply lead.
3. Connect the GROUND wire from fixture to supply ground.

FIXTURE	GREEN	GROUND
	WHITE	ACN
	BLACK	ACL

INSTALLATION

WARNING

Risk of injury or damage. Make certain power is OFF before installing or maintaining fixture.







ACCESSORY PACK



WIRE NUT X 3



CCT SETTING

By selecting the combination on the switches CCT can be set as required. 4000K is default setting.

	12W and 30W			50W		
CCT Setting						
	3000K	4000K	5000K	3000K	4000K	5000K



SWIVEL KNUCKLE MOUNT

- 1.Thread fixture into 1/2" NPS access hole in junction box (not included) or Landscape post (not included).
- 2.Seal all unused holes and threads with waterproof silicone.
- 3.Loosen the knuckle center screw to adjust the position desired.The swivel arm on the LED Flood allows 150° of vertical aiming adjustment depending on mounting location. Re-tighten.
- 4.Make electrical connections as above wiring digram.
- 5.Push wires into post or junction box and install cover plate to the junction box.

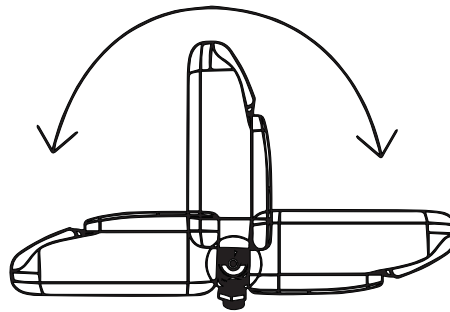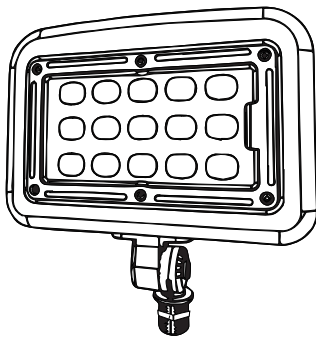

TRUNNION MOUNT

1. Locate the mounting points based on the Dimensions.
2. Install the trunnion to a desired bracket try by (2) Bolts, (2) Locking Washers and (2) Nuts (all not supplied) .
3. Adjust the angle of the fixture by trunnion.
4. Make the necessary wire connections and waterproof. Connect wires as above wiring diagram

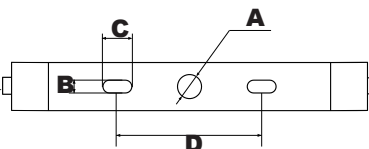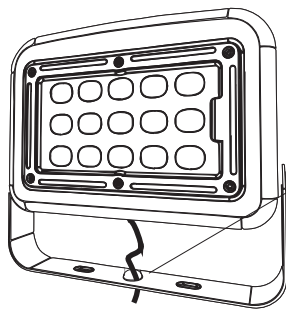

Wattage	A(mm)	B(mm)	C(mm)	D(mm)
12W	Φ10.5	9	16	50
30W	Φ10.5	9	16	50
50W	Φ10.5	9	16	90

