

TRIA PENDANT LIGHT



PRODUCT DESCRIPTION

The TRIA pendant comes in geometric triangle forms. Available in multiple sizes to fit the scale, proportions and light output requirements of the project. Optional acoustic system that maximizes surface area to absorb sound waves and improve harmony in the installed space, providing a perfect integration of lighting and acoustic control.

FEATURE

- Geometric triangle forms
- Available in standard light and acoustic w/light
- 4 sizes to choose
- 30+ acoustic felt colors available

ELECTRICAL SYSTEM

- Input Voltage: 120-277V, 50/60Hz
- Minimum Ambient -20°C, Maximum Ambient is 40°C
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

PERFORMANCE

CRI

90

CCT

3000K, 3500K, 4000K

Dimming

0-10V Dimming

Projected Lifetime

L70 - 100,000 Hours


Working Temperature

-4-104°F (-20-40°C)

Certifications

- cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0
- Suitable for damp locations
- RoHs compliant

DIMENSION

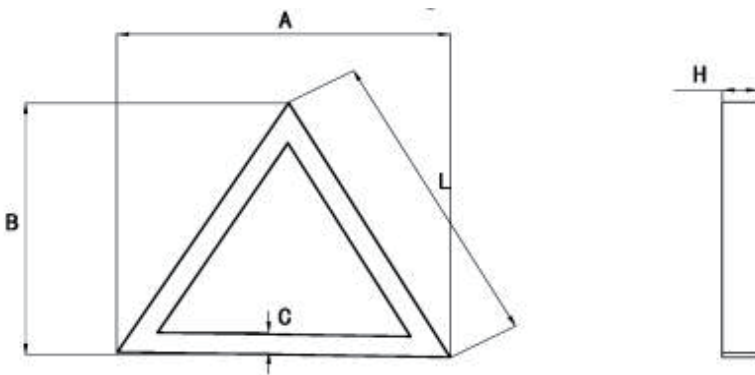

Wattage	A	B	C	L	H
25W	16.4"(416mm)	14.2"(360mm)	1.97"(50mm)	16.36"(415mm)	3.0"(75mm)
40W	20.5"(520mm)	17.7"(450mm)	1.97"(50mm)	20.45"(520mm)	3.0"(75mm)
90W	30.7"(780mm)	26.6"(675mm)	1.97"(50mm)	30.7"(780mm)	3.0"(75mm)
180W	40.9"(1038mm)	35.4"(900mm)	1.97"(50mm)	40.9"(1038mm)	3.0"(75mm)

Ordering Information

Example: TRIA - / - 25 - 40 - 90 - 1 - ACPMK - / - WH - NSAC-021 130

1 2 3 4 5 6 7 8 9 10

1. Series

TRIA

5. CRI

90 - 90Ra

2. Acoustic Configuration

Blank- Light without Acoustic **LA** - Light with Acoustic

* If choose Acoustic, please choose the acoustic color in the following list.

6. Voltage

1 - 120-277V

3. Watts/Diameter

25 - 25W **40 - 40W**
 90 - 90W **180 - 180W**

7. Installation

ACPMK - Aircraft Cable
Pendant Mount Kits*

4. CCT

30 - 3000K **35 - 3500K** **40 - 4000K**

8. Controls

Blank - None

9. Frame Finish

WH - White

* White finish frame is standard. Custom colors might be available for an additional fee. Please check with Customer Service for more information.

10. Acoustic Color



* The standard acoustic colors include: NSAC-021 130, NSAC-042 146, NSAC-028 110, NSAC-002 122, NSAC-033 103. Other acoustic colors might be available for an additional fee. Please check with Customer Service for more information.

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured.

Watts	Lumen Output	AC Input 120V	CCT	LPW
25	2500	0.21A	3000K	100
40	4000	0.33A	3000K	100
90	9000	0.75A	3000K	100
180	18000	1.50A	3000K	100

Warranty

Five year limited warranty.

Specifications subject to change without notice.