

⚠ CAUTION! Risk Of Electric Shock

⚠ Turn off all power prior to installation by switching off circuit breaker or removing fuse at fuse box.

Installation requires knowledge of the lighting luminaires electrical systems. If not qualified, do not attempt installation and contact a qualified electrician.


NOTES

1. Indoor lighting only.
2. Before installation, ensure the LED panel is not damaged.
3. Don't stare at the LED luminous surface for long time.
4. Keep away from children, and ensure working electrical apparatus inaccessible to them.
5. No packages accessible to children, because they might be choked for playing, or eating the small accessories.
6. No covering, be away from fire or high-temperature substance.
7. Manufacturer reserves the right to offer no replacement or warranty to the led panels disassembled or repaired by users themselves.
8. Cut off power before cleaning the panels with dry cloth, use no chemical or corrosive substance.
9. Cut off power before installation.
10. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.

WIRE CONNECTION

Universal voltage driver permits operation at 120V thru 277V, 50 or 60 Hz.

1. Connect the voltage supply Line to our AC-L terminal
2. Connect the voltage Neutral supply to our AC-N terminal
3. Connect the green/yellow ground lead to the supply ground lead

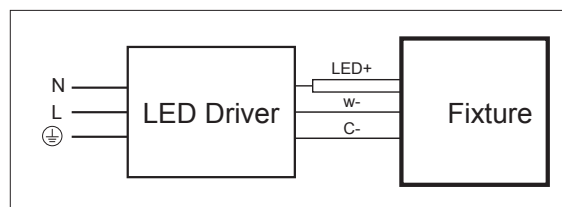


WATTAGE AND CCT SETTING

Wattage DIP Switch


40SP for 2X2 and 1X4

Default Setting: 40W




72SP for 2X4

Default Setting: 72W




50SP for 2X4


Default Setting: 50W



CCT DIP Switch



Default Setting: 4000K

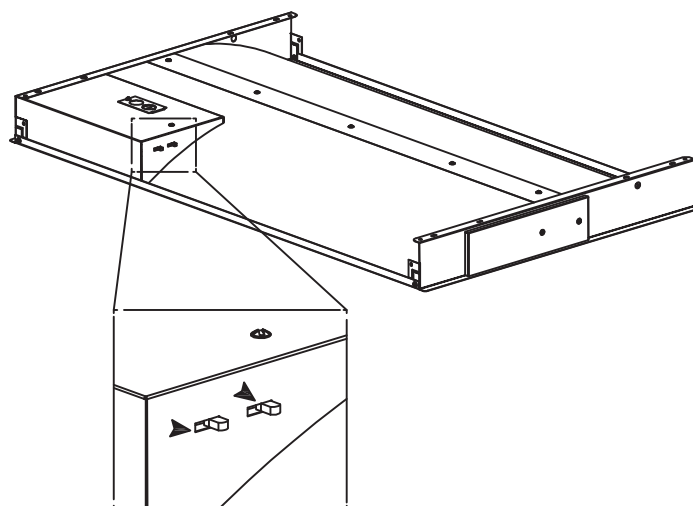



INSTALLATION

RECESSED MOUNT (T-Grid Ceiling)

1. Turn off the power.
2. Remove the ceiling(s) at an appropriate location where the light fixture is to be installed. See Figure1.
3. After securing the light fixture to the T-bar then secure the light fixture to the ceiling with aircraft cable or wires capable of supporting 100lbs.minimum. See Figure2.
4. Remove access cover plate and remove the necessary knockout. Connect cable wires with appropriate relief strain and wire connectors (not provided). See Figure 3.
5. Reinstall the access cover plate with removed screws. Make sure ALL wires are tucked into the housing and not get pinched by the cover. See Figure 3.

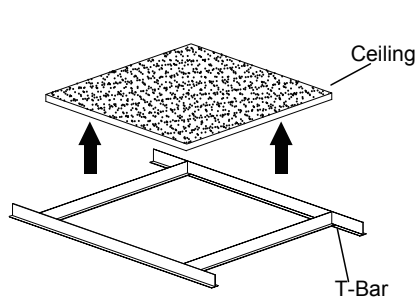


Figure1

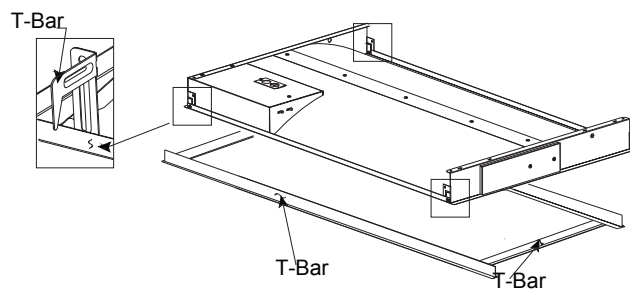


Figure 2

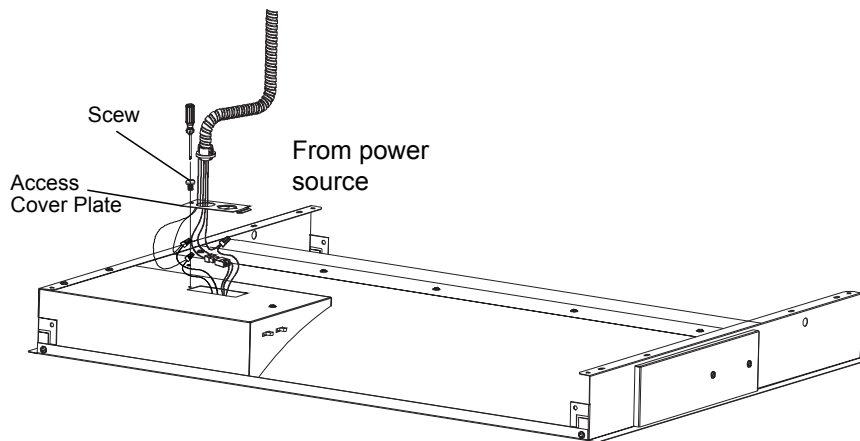


Figure 3