

Safety Instruction

1. READ CAREFULLY BEFORE INSTALLING FIXTURE. PLEASE KEEP THIS MANUAL FOR FUTURE USE.
2. Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
3. To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, and other hazards please read all warnings and instructions included with and on the fixture box and all fixture labels.
4. Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
5. Verify that supply voltage is correct by comparing it with the luminaire label information.
6. Make all electrical and grounded connections in accordance with the National Electrical Code (NEC) and any applicable local code requirements.
7. All wiring connections should be capped with UL approved wire connectors.
8. Review the wire connection before beginning, and make sure fixture is grounded properly.
9. Disconnect or turn off power before installation or servicing.

Maintenance Caution


1. Avoid direct eye exposure to the light source while it is on.
2. For lighting controls, follow control instructions carefully.
3. Turn power off and wait for fixture to cool before performing maintenance.
4. Maintenance of the luminaires should be performed by person(s) familiar with the luminaires' construction and operation and any hazards involved.

Shock And Fire Hazard

1. Keep combustible and other materials that can burn away from luminaire and lamp/lens.
2. MIN 90°C SUPPLY CONDUCTORS.

WIRE CONNECTION

Universal Voltage permits operation at 120-277VAC, 50 or 60 Hz.

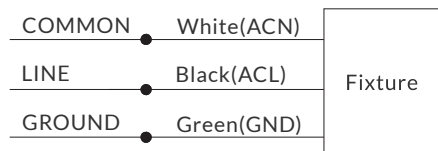

Make the following Electrical Connection:

- a). Connect the voltage supply line to ACL (Black).
- b). Connect the voltage supply Common to ACN in (White).
- c). Connect Green ground lead to the supply ground lead (Green).

ACCESSORY PACK



Wire Nuts (3)

INSTALLATION

Pole Mounting

Step 1. Turn power off. See Figure 1.

Step 2. Make wire connection with supplied wire nuts and make waterproof treatment by others per "Electrical Connections". See Figure1.

Step 3. Slip the fixture onto a tenon or pole with diameter of 2-3/8" to 3" and rotate the fixture to a desired orientation.

Step 4. Tighten all set screws A (4). See Figure1.

Step 5. Remove the screws B and take off the top cover. Select desired wattage and CCT by the DIP switches, then fasten the top cover back to the fixture by the removed screws B. See Figure2.

Figure 1


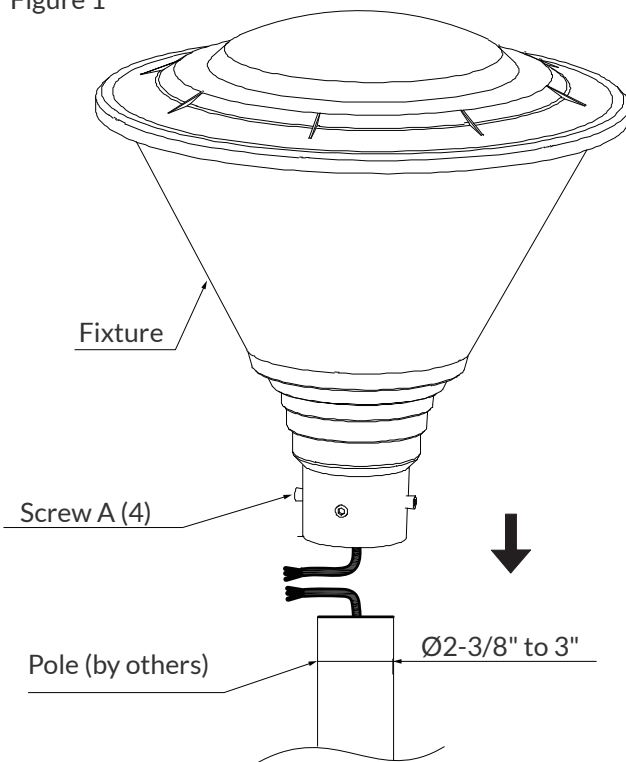


Figure 2

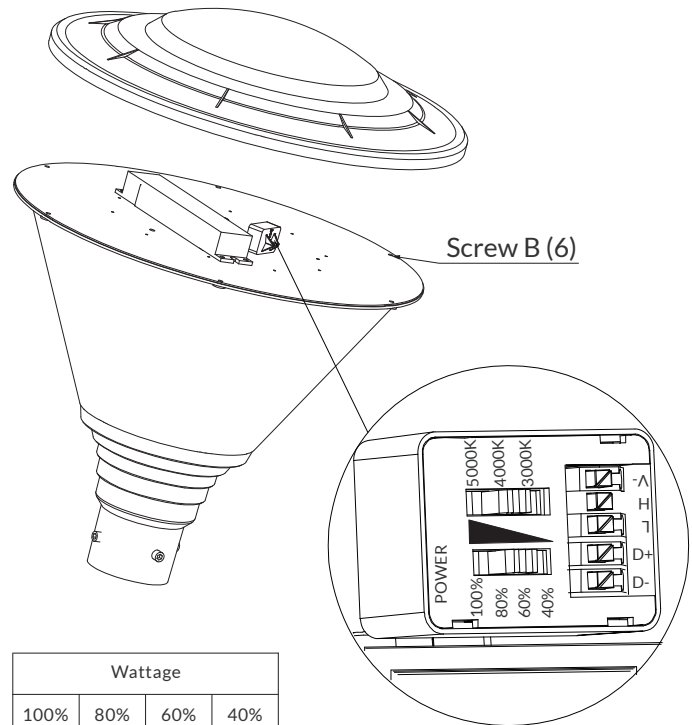

*The factory default setting: 100W and 4000K.