


- Design for drop ceilings in commercial and institutional applications
- Reducing maintenance and energy usage costs
- Universal voltage 120-277V
- 1-10V dimming









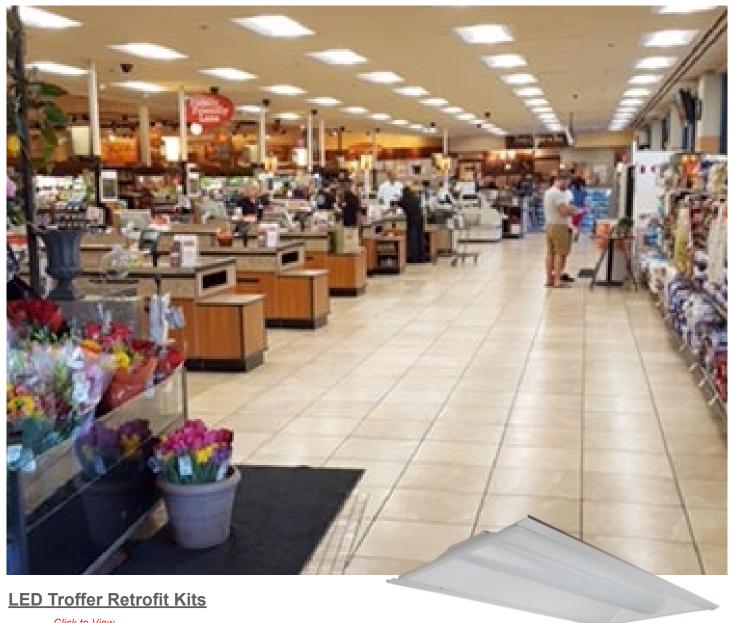

- Click to View
- Special design can fit most of the FL T8/T8/U-bent troffer housings
- Easy installation. Only need to remove the old troffers' covers and the ballast, and then connect the input voltage wires and safety hooks
- Consistent light distribution as FL lamps
- 125lm/W high efficacy
- Universal voltage 120-277V
- 1-10V dimming
- Replace traditional fluorescent troffers in lay-in or T-grid ceilings in avariety of commercial and institutional applications












- connection structure
- Extrusion Aluminum and PC diffuser enable even light distribution
- High efficiency up to 110lm/W
- Standard 1-10V dimming from 10% to 100%
- Operating Temperature: -20~40°C (-4~104°F)







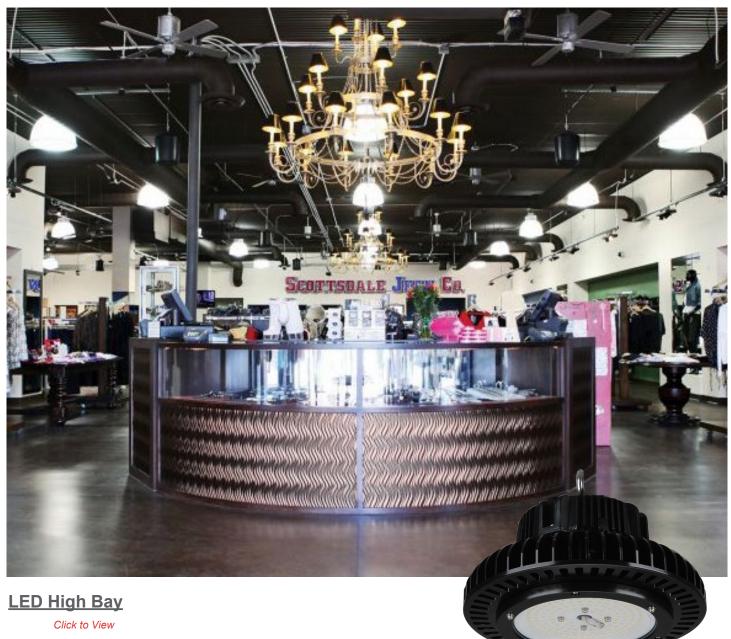

- Excellent thermal management in one-piece structure by cold-forging technology
- Optional beam angle with reflector in beam angle 60,70, 90,120 degree
- Low maintenance
- Optional motion sensor
- 4000K available
- 347/480V available







