

SUITABLE FOR MODEL

IMAGE MAY VARY FROM ACTUAL PRODUCT

SAFETY INSTRUCTION

READ CAREFULLY BEFORE INSTALLING LAMP. PLEASE KEEP THIS MANUAL FOR FUTURE USING.

Do not connect the product to the power supply while it is in the packing unless the packing has been adapted for display purpose.

Disconnect fluorescent fixture from main power supply prior to installation to ensure the fixture is properly grounded.

DO NOT INSTALL THIS LAMP IN A PRE-HEAT LUMINAIRE.

THIS LAMP ONLY OPERATES ON ELECTRONIC BALLASTS. IF LAMP DOES NOT LIGHT WHEN THE LUMINAIRE IS ENERGIZED, REMOVE LAMP FROM LUMINAIRE AND CONTACT LAMP MANUFACTURER OR QUALIFIED ELECTRICIAN.


CAUTION RISK OF FIRE – IF THE LAMP OR LUMINAIRE EXHIBITS UNDESIRABLE OPERATION (BUZZING, FLICKERING, ETC.), IMMEDIATELY TURN OFF POWER, REMOVE LAMP FROM LUMINAIRE AND CONTACT MANUFACTURER.

1. CHECK THE LAMP BEFORE INSTALLATION, IF THERE IS ANY DAMAGE CAUSED DURING TRANSPORTATION, DO NOT INSTALL.
2. MAINTENANCE SHOULD BE CARRIED OUT BY TECHNICAL PERSONNEL ONLY.
3. DO NOT STARE AT LIGHT SOURCE WITH BARE EYES FOR A LONG TIME, OR BEAM TO OTHERS' EYES.
4. DO NOT PLACE ANY OBJECTS ON THE LAMP.
5. KEEP THE LAMP AWAY FROM FLAME OR HIGH TEMPERATURE OBJECTS.
6. ONLY FOR INDOOR USE.
7. ONLY REPLACE WITH SAME TYPE OF LED TUBE! RISK OF ELECTRICAL SHOCK!
8. IF THE GLASS LAMP TUBE IS BROKEN, THE LAMP MUST BE DISPOSED OF IMMEDIATELY!
9. DISCONNECT LAMP FROM POWER SUPPLY BEFORE ANY MAINTENANCE.
10. CLEAN LUMINAIRE WITH DRY CLOTH.
11. DO NOT CLEAN THE LAMP WITH CORROSIVE CHEMICAL.
12. NOT FOR EMERGENCY LIGHTING.

THIS PRODUCT MAY CAUSE INTERFERENCE TO RADIO EQUIPMENT AND SHOULD NOT BE INSTALLED NEAR MARITIME SAFETY COMMUNICATIONS EQUIPMENT OR OTHER CRITICAL NAVIGATION OR COMMUNICATION EQUIPMENT OPERATING BETWEEN 0.45-30MHZ.



INSTALLATION

1). Turn Power OFF

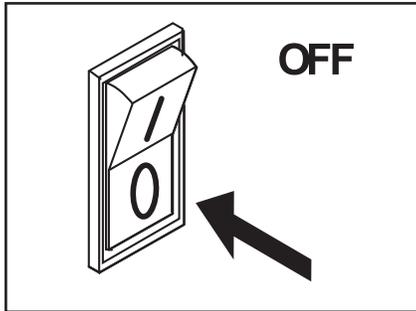


2). Remove lens or diffuser (if applicable)

3). Remove existing fluorescent lamps from the luminaire

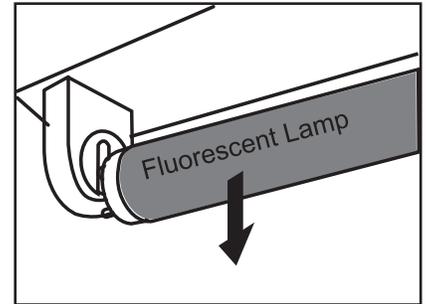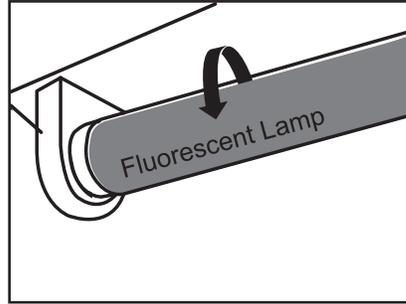


4). Bring LED lamp to luminaire and insert lamp pins into luminaire lamp holders.

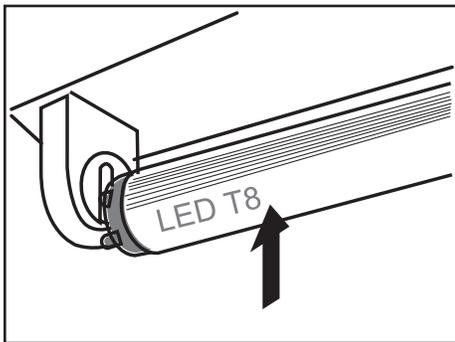


5). Rotate LED lamp until lamp locks in place. Ensure that the LED lamp front points away from the back of the luminaire.

Note: Install LED T8 replacement lamp one for each fluorescent lamp removed.

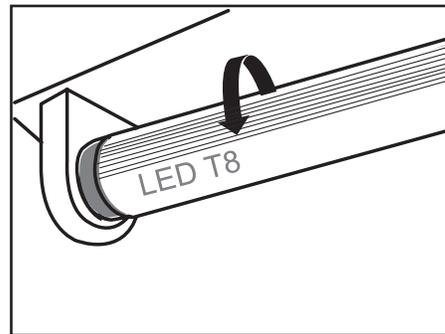

6). Place lens or diffuser back in place (if applicable)

7). Turn Power ON

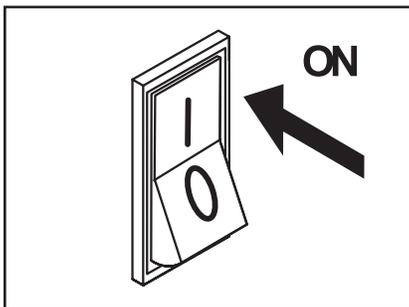

WARRANTY

LIMITED FIVE-YEAR WARRANTY. Should this product fail to perform satisfactorily due to a defect or poor workmanship within five years from the date of purchase, return it to the place of purchase and it will be replaced, free of charge. Incidental or consequential damages are excluded from the warranty.