

IMPORTANT



1. READ ALL INSTRUCTIONS.
2. INSTALL IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODE REGULATIONS.
3. THIS PRODUCT IS INTENDED TO BE INSTALLED AND SERVICED BY A QUALIFIED, LICENSED ELECTRICIAN.
4. DO NOT INSTALL IN WET LOCATIONS. FOR DRY AND DAMP USE ONLY.
5. TURN OFF ELECTRICAL POWER BEFORE INSTALLING OR SERVICING FIXTURE IN ANY WAY.
6. TO REDUCE THE RISK OF FIRE AND OVERHEATING, MAKE SURE ALL CONNECTIONS ARE TIGHT.
7. UNDER NO CIRCUMSTANCES CAN THE LIGHTING FIXTURE BE COVERED WITH HEAT INSULATION GASKET OR SIMILAR MATERIALS.

SHOCK HAZARD




MAY RESULT IN SERIOUS INJURY OR DEATH.
TURN POWER OFF AT CIRCUIT BREAKER PRIOR TO INSTALLATION OR SERVICING.








INSTALLATION

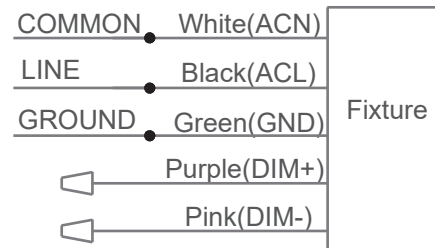Universal Voltage permits operation at 120VAC thru 347VAC, 50 or 60 Hz.


- a. Connect the voltage supply Line to out AC-L.
- b. Connect the voltage Neutral supply to our AC-N line.
- c. Connect the green/yellow ground lead to the supply ground lead.
- d. If 0-10V Dimming is used, connect the supply positive dimming lead to our 0-10V(Dim+) terminal.
- e. If 0-10V Dimming is used, connect the supply positive dimming lead to our 0-10V(Dim-) terminal.




ACCESSORY FOR DRY CEILING MOUNTED

						
Plate x1	Screw A (UNC8-32) x2	Butterfly Drywall Anchor x2	Anchor x4	Screw B x4	Clasp x2	Wire nut x5


1. Prepare mounting point in the ceiling.
2. Cover the junction box with round plate.
3. According to different ceilings to choose the right fastener to install the clasps to the ceiling.
4. Connect wires as shown in wiring diagram with wire nuts, hide all wires into junction box. Make sure no wires get pinched.
5. Support fixture to the clasps, make the calsp hook into fixture back slot. Make sure the clasps hang the fixture firmly.




Drywall Ceiling





Wooden Frame Ceiling



Cement Ceiling

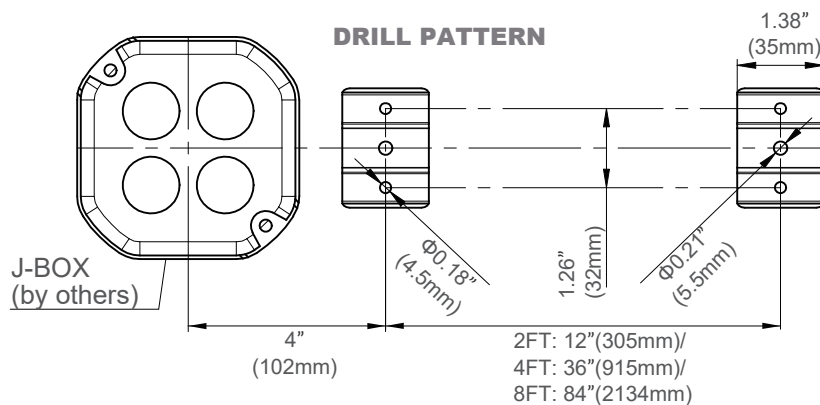


SIZE	Weight	L
2FT	3.3lbs / 1.5Kg	12"(305mm)
4FT	5.5lbs / 2.5Kg	36"(915mm)
8FT	10lbs / 4.5Kg	84"(2134mm)

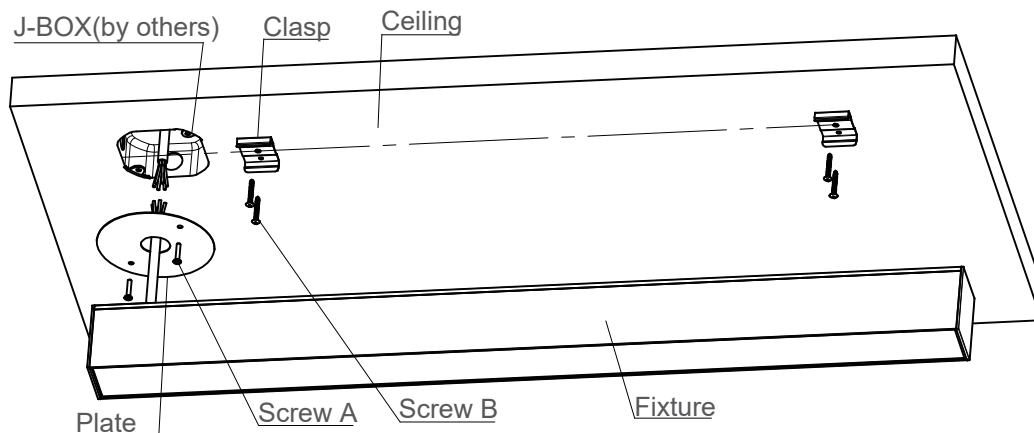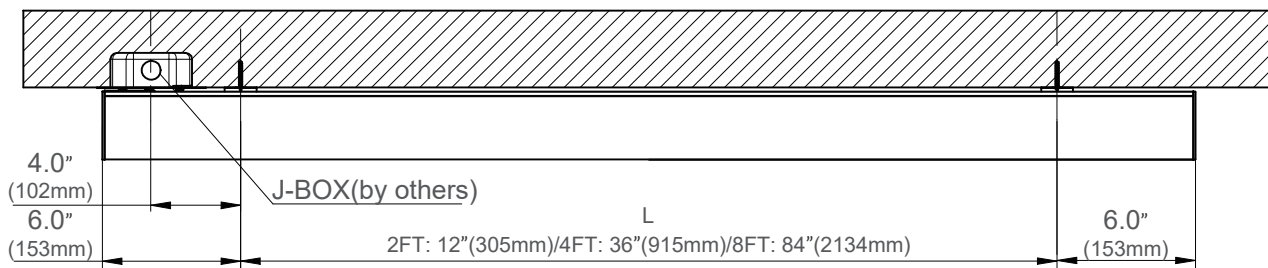

Field-Adjustable Wattage & CCT

1. DIP switches are located onto the fixture back.
2. The highest wattages and 4000K are default setting.
3. Select wattage and CCT by DIP switches.

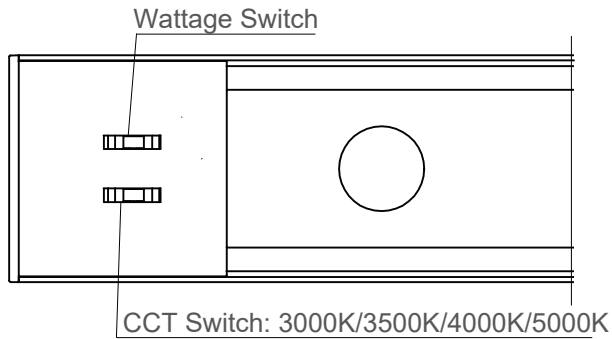

SIZE	Wattage
2FT	25W/20W/15W
4FT	50W/40W/30W
8FT	100W/80W/60W