



LED Moon Series Post Top



EPA is **0.7** Sq.Ft.

Tempered **Glass** Lens

Type II, III & V for Option

Special **Reflector** Design



Pavilion Led Post Top

Diffused glass lens to reduce glare

Types II, III, IV & V Option

Integral 10KA surge suppression protection



MT LED Area Light



Tempered **Glass** Lens
Up to **29,000** lm

Type III, IV, VW, VM & VN for Option

Special **Reflector** Design



SMT LED Area Light

40W to 80W

Low EPA **0.53** Sq.Ft.




Tempered **Glass** Lens
Type II, III IV & V for Option



SKY LIGHT

Type II, III & V for Option
Integral 10KA surge suppression protection
Photocell and 7-pin receptacle for option



LED Traditional Wall Pack

Tempered **Glass** Lens

Top 5 LED Chip & LED Driver

EBU Available For Low Wattage



LED Leopard Series Mini Wall Pack

Top 5 LED Chip
Modern Yet Classic Design
Versatile Design



LED V-Line Wall Pack

Top 5 LED Chip & LED Driver

Tempered **Glass** Lens

EBU Available For Low Wattage

3000-14,000 Lumen Package



LED Leopard Series Mini Flood Light



Top 5 LED Chip

Modern Yet Classic Design

Versatile Design

Knuckle, Trunnion Mountings



LED V-Line Flood Light



3000-14,000 Lumen Package

Top 5 LED Chip & LED Driver

Knuckle, Trunnion, Slip Fitter Mountings



LED Parking Garage Light

Top 5 LED Chip & LED Driver
PC Lens Provides An Even Light Distribution



LED Pad Canopy Light



Tempered **Glass** Lens

Slim Low Profile Design

Top 5 LED Chip & LED Driver


Patented Air Cooling Design Weep Holes

Surface Or Pendant Mountings Optional



LED LS Garage Light

Impact Resistant Prismatic Lens
Superior **Low-glare** Illumination

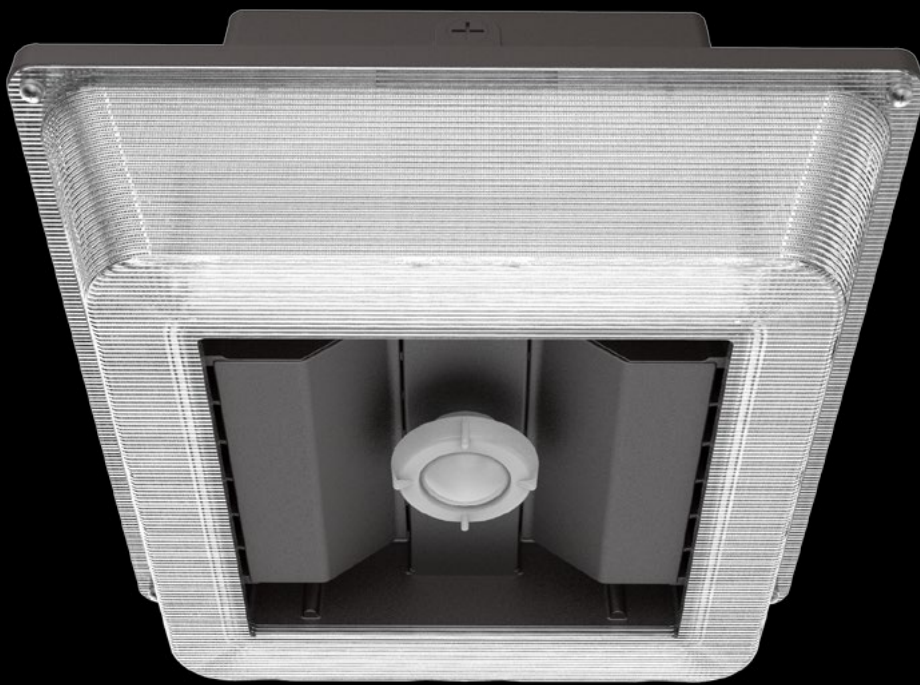

Top 5 LED Chip & LED Driver
Patented **Air Cooling** Design
Surface Or Pendant Mountings
EBU Backup Available



LED TR Security Light



Top 5 LED Chip

Impact Resistant PC Lens

Integrated Photocell For Dusk To Dawn Operation

Slim Modern Design



Standard LED Bollards

Dome, flat and peak tops for option
IP 66 rated for wet location



LED Vapor Tight



Available in 4ft and 8ft

NSF Approved for Splash and Non-food Zones

IP 66 rated for wet location



LED Linear High Bay



Top 5 LED Chip & LED Driver

EBU Backup Available

Reflector Providing 82 Degree Beam Angle



LED HEAVENLY Linear High Bay

THERMAX

°C 65 °F 150



9,000-60,000 Lumen Package


Top 5 LED Chip & LED Driver

General, Narrow And Medium Distributions Optional

EBU Backup Available

V-Hook, Pendant, Channel Mountings

Maximum **150°F** High Ambient



LED UFO High Bay

Tempered **Glass** Lens
347/480V available



Replaces up to **750W** HID
In Beaming Angle of 60°/90°/120°



LED Moon Series Low Bay

35W To 100W

Sleek Design

347/480V Available

Tempered **Glass** Lens



LED STD STRIP 2FT & 4FT

No light leakage

Continuous-run mounting

Built-in sensor and **EBU** backup available



LED STD WRAP 2FT & 4FT

Top 5 LED Chip & LED Driver

Clear **PMMA** Diffuser Lens

EBU Backup Available



LED Flat Panel

TOP 5 LED Chip

Standard 1-10V Dimming

EBU Backup Available

PMMA Light Transmitter



Human Centric LED Light

Smart Lighting Technology

Human Centric

Remote and **APP Controller**

Different **Programmable Preset Scenes**

2017



PROGRESS
Report

SELECTION



LED Troffer Retrofit Kit



Designed to Retrofit Fluorescent Troffer

Quick and **Easy Installation**

EBU Backup Available




LED T8 Quick Kit

Full Options To Retrofit Fluorescent Fixtures

2 Feet And 4 Feet

From 1-Tube To 4-Tube Systems

Up To 130 LPW

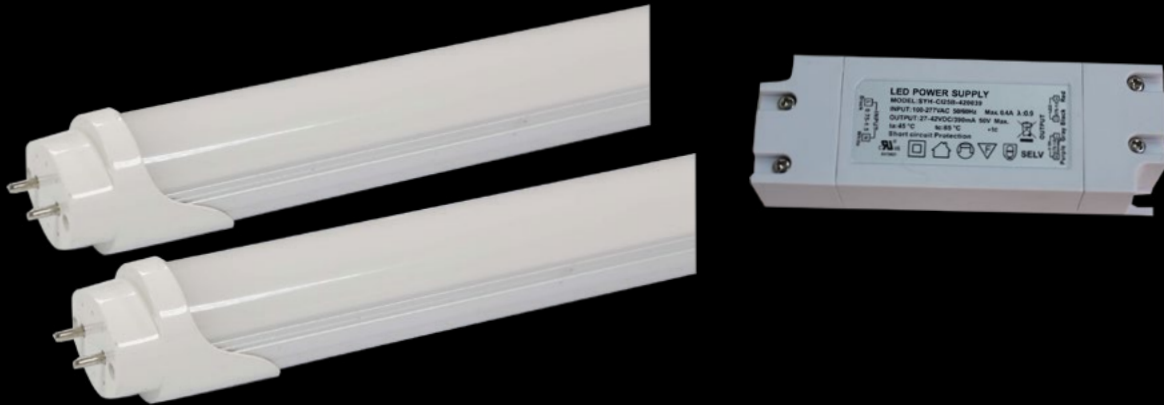



www.AboveAllLighting.com

Better Light, Better Life, Above All Others