

### SUITABLE FOR MODEL



IMAGE MAY VARY FROM ACTUAL PRODUCT

### SAFETY INSTRUCTION

**READ CAREFULLY BEFORE INSTALLING FIXTURE. PLEASE KEEP THIS MANUAL FOR FUTURE USING.**

Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety.


**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. MAKE CERTAIN POWER OFF BEFORE INSTALLING OR MAINTAINING FIXTURE. CHECK THAT VOLTAGE IS COMPATIBLE WITH FIXTURE DRIVER, USE APPROVED CONNECTORS FOR ALL ELECTRICAL CONNECTIONS.**

### MAINTENANCE CAUTION


1. Review the wire connection before beginning, and make sure fixture is grounded properly.
2. For lighting controls, using functioning correctly.
3. Turn power off and wait for fixture cooling to operate.
4. Maintenance must be done by professionals.

### WIRE CONNECTION


#### WITHOUT CONTROL

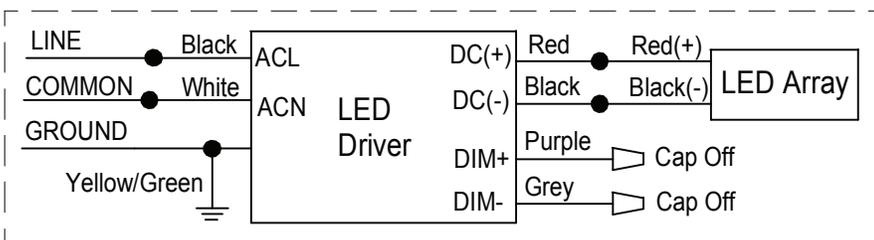

### WITH MICROWAVE DIMMING SENSOR

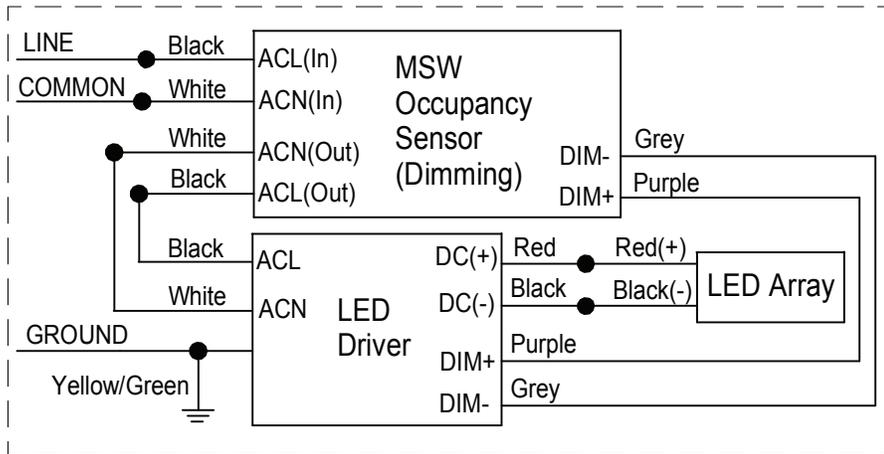


### WITH PHOTOCELL CONTROL

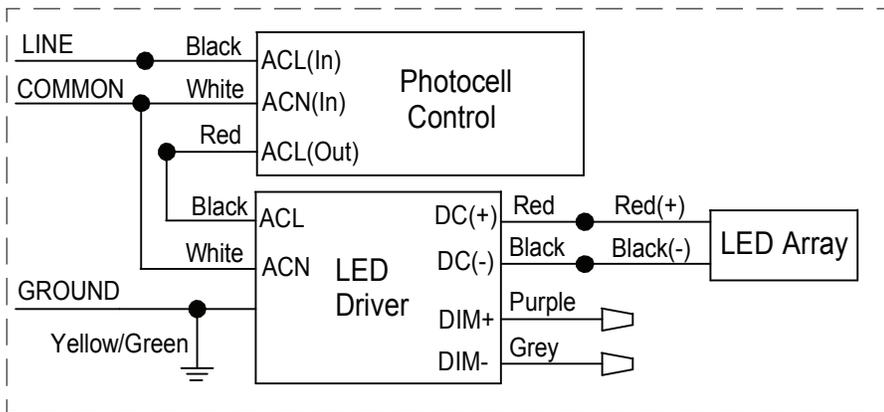

## INSTALLATION

Install the fixture as the picture shows. (Installation height  $\geq 6.6$ ft.)

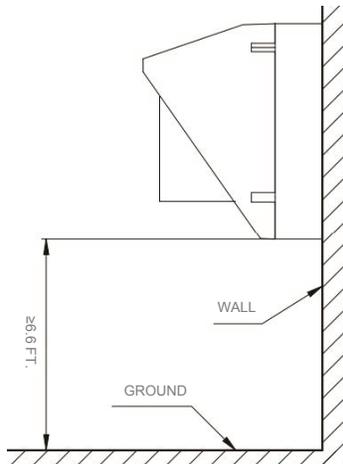

1. Cut off the power before installation.
2. Unscrew the two fixed screws, unload the top cover, and fix the base cover to the wall.
3. Pass the three phase cable by the base or 1/2NPT hole, and connect it with AC driver and ground wire.
4. Connect DC wire from the reflector hole with DC LED board. (Caution: red to red, black to black)
5. Close the cover, and tighten the two fixed screws.
6. Choose the suitable place to install, connect the power to lighten up. (Finish the installation)

