

Draft

SELECTABLE SLIM WALL PACK



PRODUCT DESCRIPTION

The selectable & adjustable architectural Slim Wall Packs, featured by wattage and CCT selectable. Injection die-cast aluminium housing. Tempered glass lens. Installation made simple and easy with a hinged junction box. Ideal for landscape, wall/surface, low level pathway, apartment buildings, schools, multi-use facilities.


FEATURES

- Architectural low profile design
- 0-90 degree angle adjustable
- 3000K, 4000K and 5000K selectable
- Wattage selectable
- Die-cast aluminum housing
- Tempered glass lens


ELECTRICAL SYSTEM

- Input voltage: 120-277V
- 50/60Hz
- Power Factor: >0.9
- Total Harmonic Distortion: <20% at full load
- Working Temperature: -40 - 104°F (-40 - 40°C)

DIMENSION

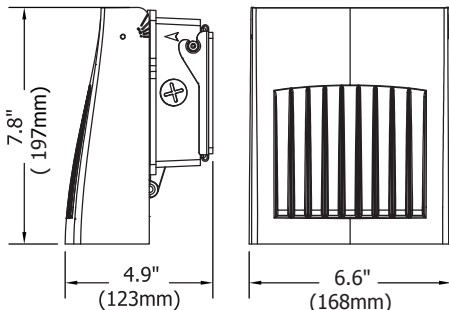

20/24

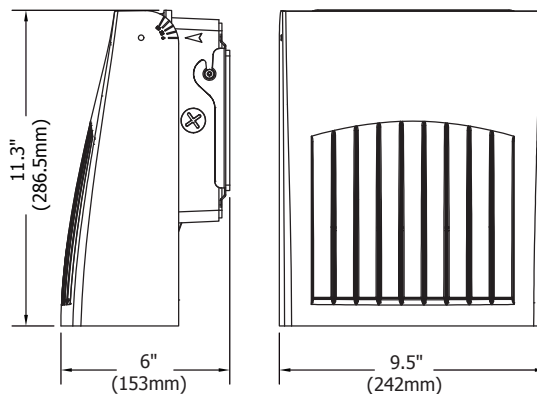

40/60/75

PERFORMANCE

CRI

70

CCT

3000K, 4000K, 5000K selectable

Dimming

0-10V Dimming Standard

Projected Lifetime

L70 -100,000 Hours

Working Temperature

-40 - 104°F (-40 - 40°C)

Certifications

- cUL listed
- Suitable for wet locations
- RoHs compliant

Ordering Information

Example: SSWP-SPS-SW1

Name	Watts	- CCT	Voltage	- Control	- Finish
SCAN	SPS - Selectable Power 20W/24W ¹	- SW - Selectable White 3000K/4000K/5000K ²	1-120-277V	- Blank - None	- Blank - Bronze
	SPL - Selectable Power 40W/60W/75W ¹				


Notice:

- 24W and 75W are default setting. If need other wattage, please contact Customer Service in advance to change the setting in factory or change the setting in the field.
- 4000K is default setting. If need other CCT please contact Customer Service in advance to change the setting in factory or change the setting in the field.

* Bronze finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

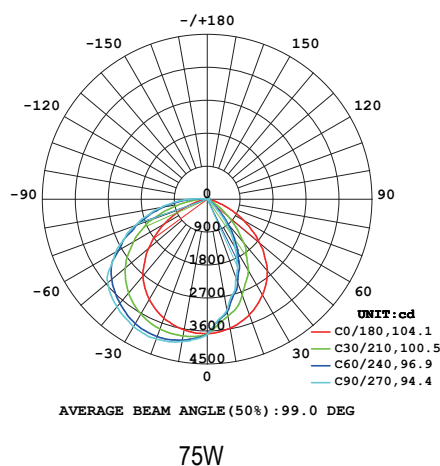

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Watts	Tested Watts	Lumen Output	AC Input 120V	CCT	CRI	LPW
20W	19W	2600	0.16A	4000K	>70	138
24W	23W	3200	0.19A	4000K	>70	138
40W	40W	5400	0.33A	4000K	>70	135
60W	57W	7800	0.47A	4000K	>70	137
75W	72W	9650	0.60A	4000K	>70	134

WARRANTY

Five year limited warranty.

Note: Specifications subject to change without notice.