

## GLAUCE WALL LINEAR



### PRODUCT DESCRIPTION

The Glauce Wall Linear delivers clear direct and indirect wall light to commercial, hospitality and residential interior wall lighting applications. Perforation and Louver luminous design. Length comes in 2FT and 4FT. 3500K, 4000K and 5000K are in one fixture. Sensor and emergency back-up are optional.

### FEATURE

- Sleek wall mounted linear design
- Perforation and Louver luminous design
- Length comes in 2FT and 4FT
- 3500K, 4000K and 5000K are in one
- Direct and indirect distribution
- Sensor and emergency back-up optional

### ELECTRICAL SYSTEM

- Input Voltage: 120-347V, 50/60Hz
- 0-10V Dimming optional
- Minimum Ambient -20°C, Maximum Ambient is 40°C
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

### PERFORMANCE

CRI

80

CCT

3500K, 4000K, 5000K selectable

Dimming

0-10V Dimming

Projected Lifetime

L70 - 100,000 Hours

Working Temperature

-4-104°F (-20-40°C)

Certifications

- cULus listed
- Suitable for dry locations
- RoHS compliant

### SPECIFICATION

L X W X H

2FT: 27 2/8" X 7 2/8" X 2 3/8"


4FT: 49 4/8" X 7 2/8" X 2 3/8"

Net Weight

2FT: 4.4 lbs / 2.0 kg

4FT: 9.9 lbs / 4.5 kg

Louver Type

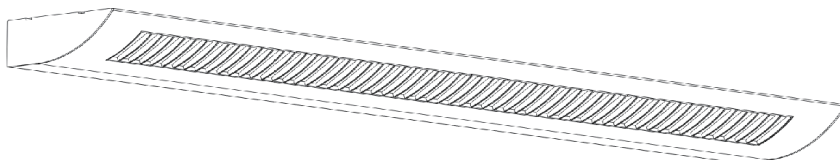

Perforation Type



## Ordering Information

### Example: GWLL1250SW8



Series	Type	Length	Watts	CCT	Voltage	Controls	Finish
<b>GWL</b>	L - Louver	<b>06 - 2FT</b>	<b>25 - 25W</b>	<b>SW - 3500K/4000K/ 5000K selectable</b>	<b>8 - 120-347V</b>	<b>- Blank - None</b>  <b>MSW - Microwave Dimming Sensor</b>  <b>EBU - Emergency Battery Back-up</b>	<b>- Blank - White</b>
	P - Perforation	<b>12 - 4FT</b>	<b>50 - 50W</b>				

Notice:

- \* White finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

## PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Result may vary per actual order.

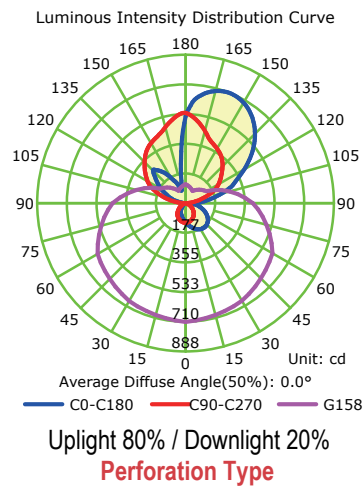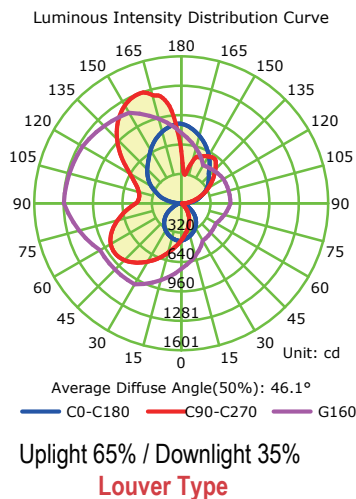

## PERFORMANCE DATA

### LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

#### Louver

Watts	Lumen Output	AC Input 120V	CCT	CRI	LPW
25	<b>2200</b>	0.20A	4000K	80	90
50	<b>4500</b>	0.42A	4000K	80	90

#### Perforation

Watts	Lumen Output	AC Input 120V	CCT	CRI	LPW
25	<b>1900</b>	0.20A	4000K	80	76
50	<b>3800</b>	0.42A	4000K	80	76

## Warranty

Five year limited warranty.

Notes: Specifications subject to change without notice.