



VILLA LED WALL LIGHT



PRODUCT DESCRIPTION

The surface mounted VILLA led wall light combines galvanized steel with durable powder coat paint in architectural grille style and milky polycarbonate lens. The VILLA led wall light is sealed with a silicone gasket and enables soft light distribution. It is designed for exterior wall mount applications such as Villa, courtyard garden, and public squares.


FEATURE

- Architectural grille style and milky polycarbonate lens enables soft light distribution
- Wide voltage 120-347V available for 18W and 29W
- Sealed decorative housing suitable for wet locations
- 90 CRI is standard
- Easy-mount back plate
- Cold temperature rated

ELECTRICAL SYSTEM

- Input voltage: 120-277V, 120-347V
- 50/60Hz
- Power Factor: >0.9
- Total Harmonic Distortion: <20% at full load
- Working Temperature: -40-104°F (-40-40°C)

SPECIFICATION

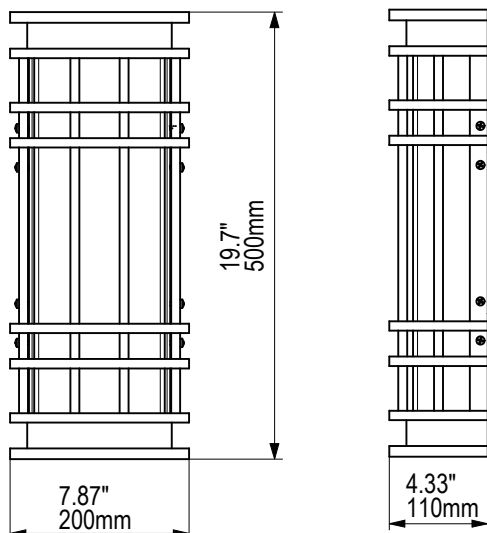

PERFORMANCE

CRI

90

CCT

3000K

Dimming

Non dimming

Projected Lifetime

L70 -100,000 Hours

Working Temperature

-40~40°C (-40~104°F)

Certifications

- SGS listed
- Suitable for wet locations
- RoHs compliant

Ordering Information

Example: VWPM18308

Name	Dimension	Watts	CCT	Voltage	Control	Finish
VWP	M - Middle Size	11 - 11W	30 - 3000K 90Ra	1-120-277V¹	Blank - None	Blank - Black
		18 - 18W		8-120-347V¹		
		29 - 29W				

Notice:


1. 120V-277V is for 11W; 120-347V is for 18W and 29W.

* Minimum order required, please contact customer service for additional information.

* Black finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

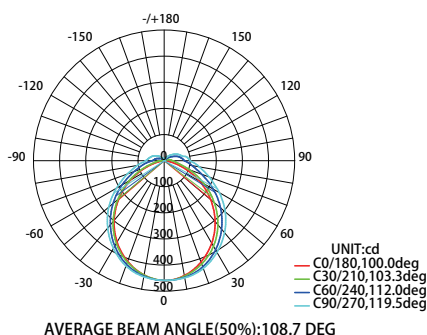

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Lumen Output	AC Input 120V	CCT	CRI
11	710	0.09A	3000K	90
18	1130	0.15A	3000K	90
29	1780	0.24A	3000K	90

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperature from -40-104°F (-40-40°C)

Ambient		Multiplier
Celsius	Fahrenheit	
0	32	1.06
10	50	1.03
20	68	1.01
25	77	1.00
30	86	0.99
40	104	0.97

Warranty

Five year limited warranty. Full warranty terms located at www.abovealllighting.com/warrantystatements

Note:

Specifications subject to change without notice.