

CYLINDER SPOT SERIES MAGNETIC TRACK LIGHT

GENERAL SPECIFICATION


Two sizes with three different beam angles. Junction arm integrated in the spotlight's body to keep the barycentre aligned with the track. This junction arm allows 360° rotation in horizontal direction and 90° rotation in vertical direction.




CCT: 2700K/3000K/4000K
CRI: RA90
DIM: Triac,0/1-10V,
Installation: Magnetic
Environment: Indoor

DIMENSION


Small 5W and 10W

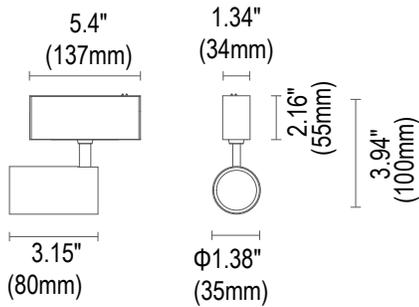

Medium 10W

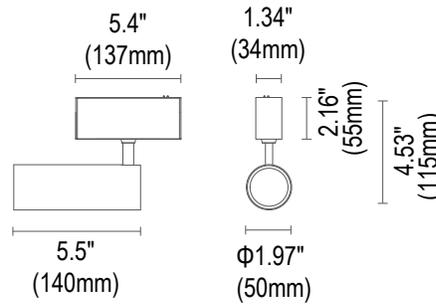

Large 20W

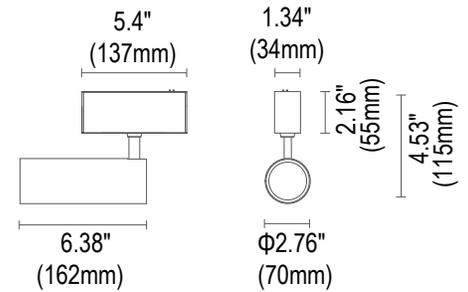

Ordering Information

Example: CSS2x5-3090-24V-30-MTM-BK

Series	Size	Watts	. CCT&CRI	. Voltage	Lens	Installation	- Finish
CS	S - Small	5 - 5W	- 2790 - 2700K 90Ra	- 24V-24Vdc ¹	20 - 20 degree	MTM - Magnetic Track Mount	- BK -Black ² Optional WH -White ²
		2x5 - 2x5W	3090 - 3000K 90Ra		30 - 30 degree		
			4090 - 4000K 90Ra		40 - 40 degree		
	M - Medium	10 - 10W			18 - 18 degree		
	L - Large	20 - 20W			24 - 24 degree 36 - 36 degree		

Notice:

1. The fixture is used for 24V magnetic track system.
2. Standard Finish is black. Custom colors might be available for an additional fee. Please check with Customer Service for more information.


Small Spot 5W


Small Spot 2x5W

Medium Spot 10W

Large Spot 20W

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

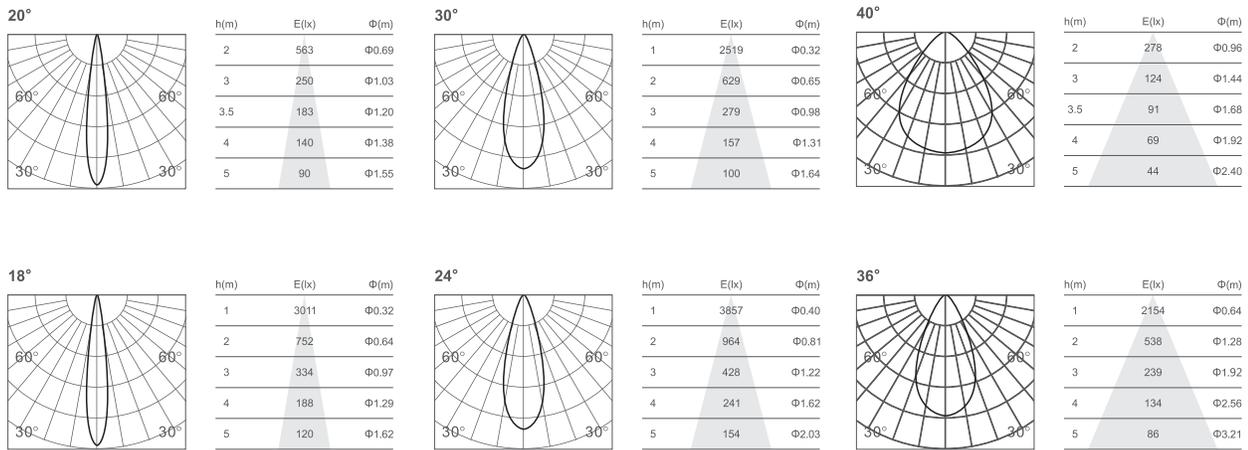

PERFORMANCE DATA

Lumen values are estimated with LED data sheet.

Watts	Lens	Lumen Output	CRI	CCT	LPW
5	20/30/40°	440	90	3000K	88
10	20/30/40°	880	90	3000K	88
10	18/24/36°	780	90	3000K	78
20	18/24/36°	1450	90	3000K	72

Warranty

Five year limited warranty.

* Specifications subject to change without notice.