



IMAGE MAY VARY FROM ACTUAL PRODUCT

LED SLIM WALL PACK




PRODUCT DESCRIPTION

Wall Packs are designed and engineered as maintenance free, energy-efficient alternatives to traditional fluorescent, high/ low pressure sodium, metal halide, induction, and other types of lighting fixtures.

SPECIFICATION

Length: 7.24"
 Width: 3.54"
 Height: 7.24"
 Max. Weight: 3.39 lbs



Ordering Information

Example: SWP18501-A

Slim Wall Pack	Watts	CCT	Voltage	Series
SWP	18-	30 - 3000K	1 - 120-277V	A
	18 Watts	40 - 4000K		
	25-	50 - 5000K		
	25 Watts			

Notice:

1. Standard Finish as Traditional Bronze.
2. DLC Premium only with 5000K at present.
3. Special Order as other finish color - Ask Customer Service for Details.

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Lumen Output	AC Input 120V	Measured Watts	CRI	Dist. Type	LPW
18W	1820	0.17A	18W	>70	N/A	101
25W	2530	0.23A	25W	>70	N/A	102

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperature from -40-104° F (-40-40°C)

Ambient		Multiplier
Celsius	Fahrenheit	
0	32	1.02
10	50	1.01
20	68	1.00
25	77	1.00
30	86	1.00
40	104	0.99


Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the LED Slim Wall Pack in a 77°F ambient, (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

Operating Hours	0	25,000	50,000	100,000	250,000
Lumen Maintenance Factor	1.0	0.98(L98)	0.96(L96)	0.92(L92)	0.70(L70)

Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

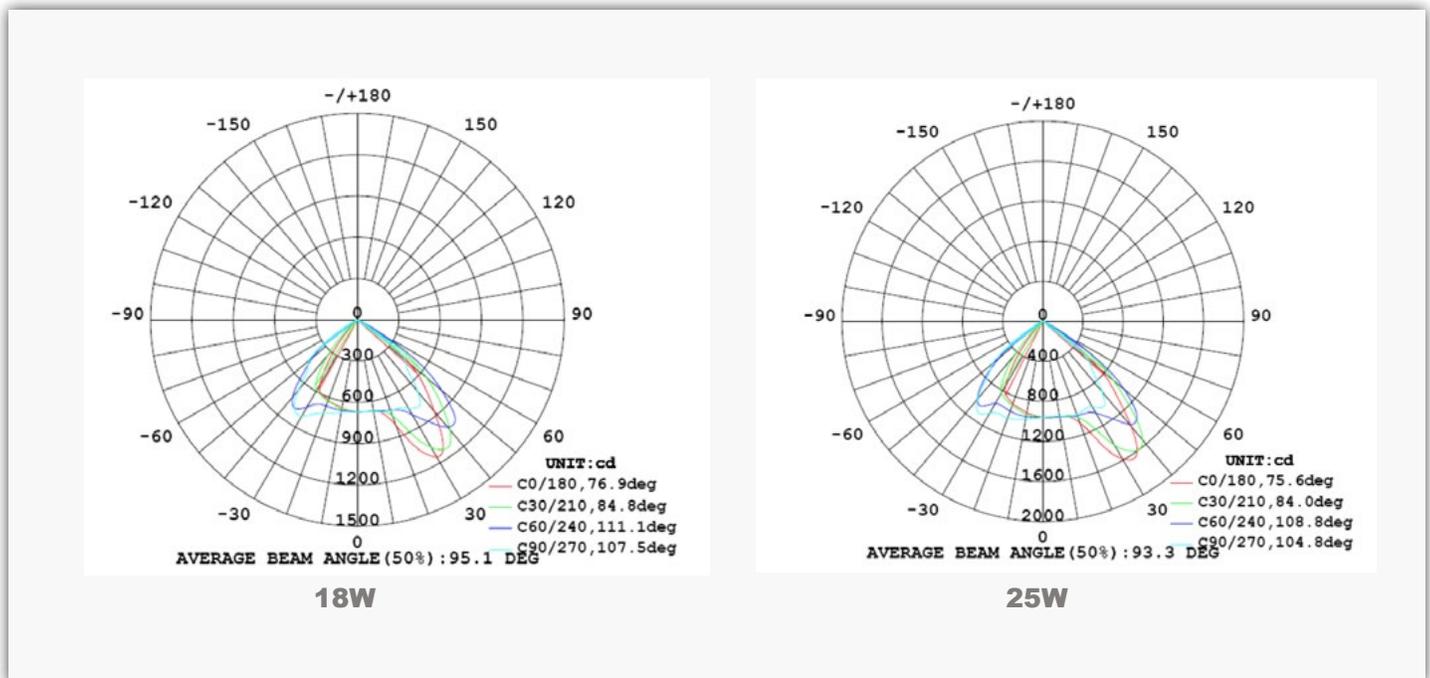

PRODUCT SPECIFICATIONS

CONSTRUCTION & MATERIALS

- Housing is all aluminum construction
- Terminal block for power input suitable for 2 - 10 AWG wire
- Luminaire sides are rugged die cast aluminum with integral, weathertight LED driver compartments and high performance heat sinks

System Wattage	Max THD (%)	Power Factor	Power Efficiency	Replaces/ Equiv.(MH)
18W	20	>0.9	90%	100W
25W	20	>0.9	90%	125W

Ref#: 10033-10504

ELECTRICAL SYSTEM

- Input Voltage: 120-277V
- 50/60Hz
- Class II Driver
- Minimum Ambient -40°C
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

CERTIFICATIONS AND QUALIFICATIONS

- cETLus Listed
- Suitable for wet location
- IP65 rated
- DLC qualified. Please refer to <http://www.designlights.org/QPL> for most current information
- RoHS compliant

Warranty

Five year limited warranty. Full warranty terms located at www.abovealllighting.com/warrantystatements

Note: Specifications subject to change without notice.