

SUITABLE FOR MODEL



SAFETY INSTRUCTION



READ CAREFULLY BEFORE INSTALLING FIXTURE. PLEASE KEEP THIS MANUAL FOR FUTURE USE.

Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

MAKE CERTAIN POWER IS OFF BEFORE INSTALLING OR MAINTAINING FIXTURE.

CHECK THAT VOLTAGE IS COMPATIBLE WITH FIXTURE DRIVER. USE APPROVED CONNECTORS FOR ALL ELECTRICAL CONNECTIONS.

MAINTENANCE CAUTION




1. Review the wire connection before beginning, and make sure fixture is grounded properly.
2. For lighting controls, follow control instructions carefully.
3. Turn power off and wait for fixture to cool before performing maintenance.
4. Maintenance must be done by professionals.

WIRE CONNECTION

Voltage permits operation at 120VAC, 50 or 60 Hz.

Make the following Electrical Connection:

- a). Connect the voltage supply line to ACL in Black.
- b). Connect the voltage supply Neutral to ACN in White.
- c). Connect ground lead to the supply ground lead.

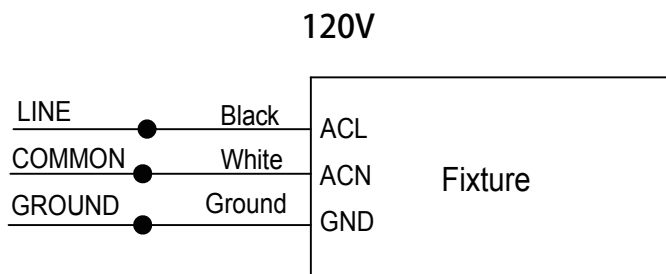

INSTALLATION

WARNING

Risk of injury or damage. Make certain power is OFF before installing or maintaining fixture.

ACCESSORY PACK



WIRE NUT x 3



SCREW x 2

INSTALLATION STEPS

1. Separate fixture body from Mounting Plate by removing (2) Set Screws.
2. Attach Mounting Plate to Electrical Junction Box (by others) using (2) Screws provided.
3. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts provided.
4. Push all wires and terminals into the J-Box. Then attach the Fixture to the Mounting Plate with (2) Screws. The end with Up-Arrow label must be up. All wires and terminals need to be pushed into Electrical Junction Box and no wires get pinched.
5. Seal around the top and side perimeter between the fixture and the wall surface with weather resistant caulking (by others). Pay attention to leave space of about 1" at bottom, which should be left un-caulked to prevent moisture build-up.

