



MAGIC LED LINEAR LIGHT




ABOVE ALL
www.AboveAllLighting.com

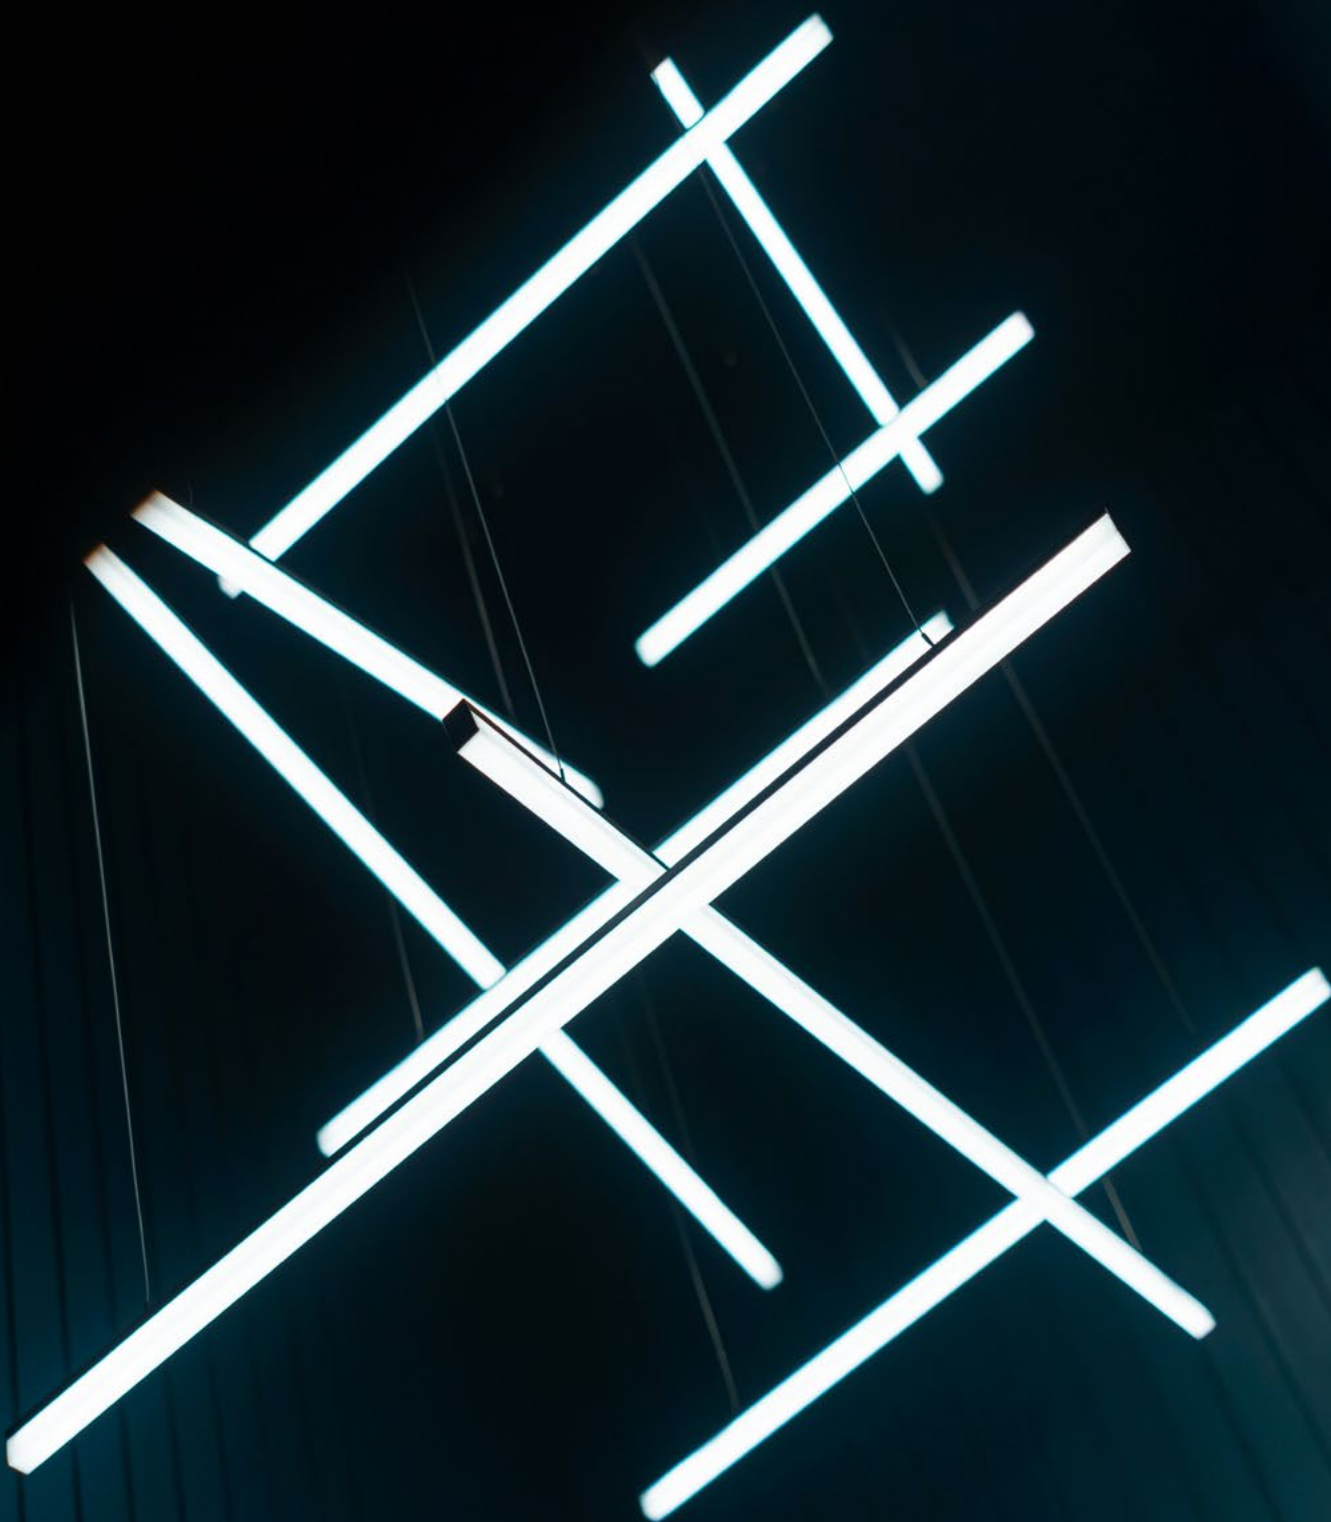

MAGIC LINEAR

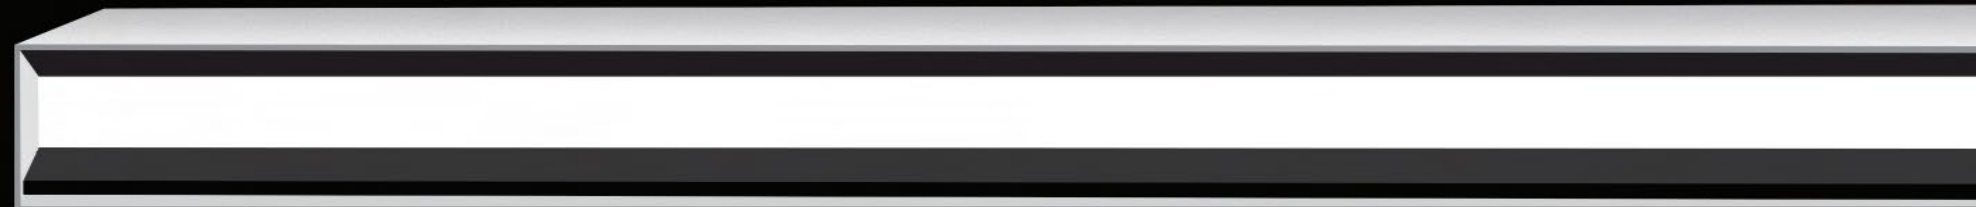

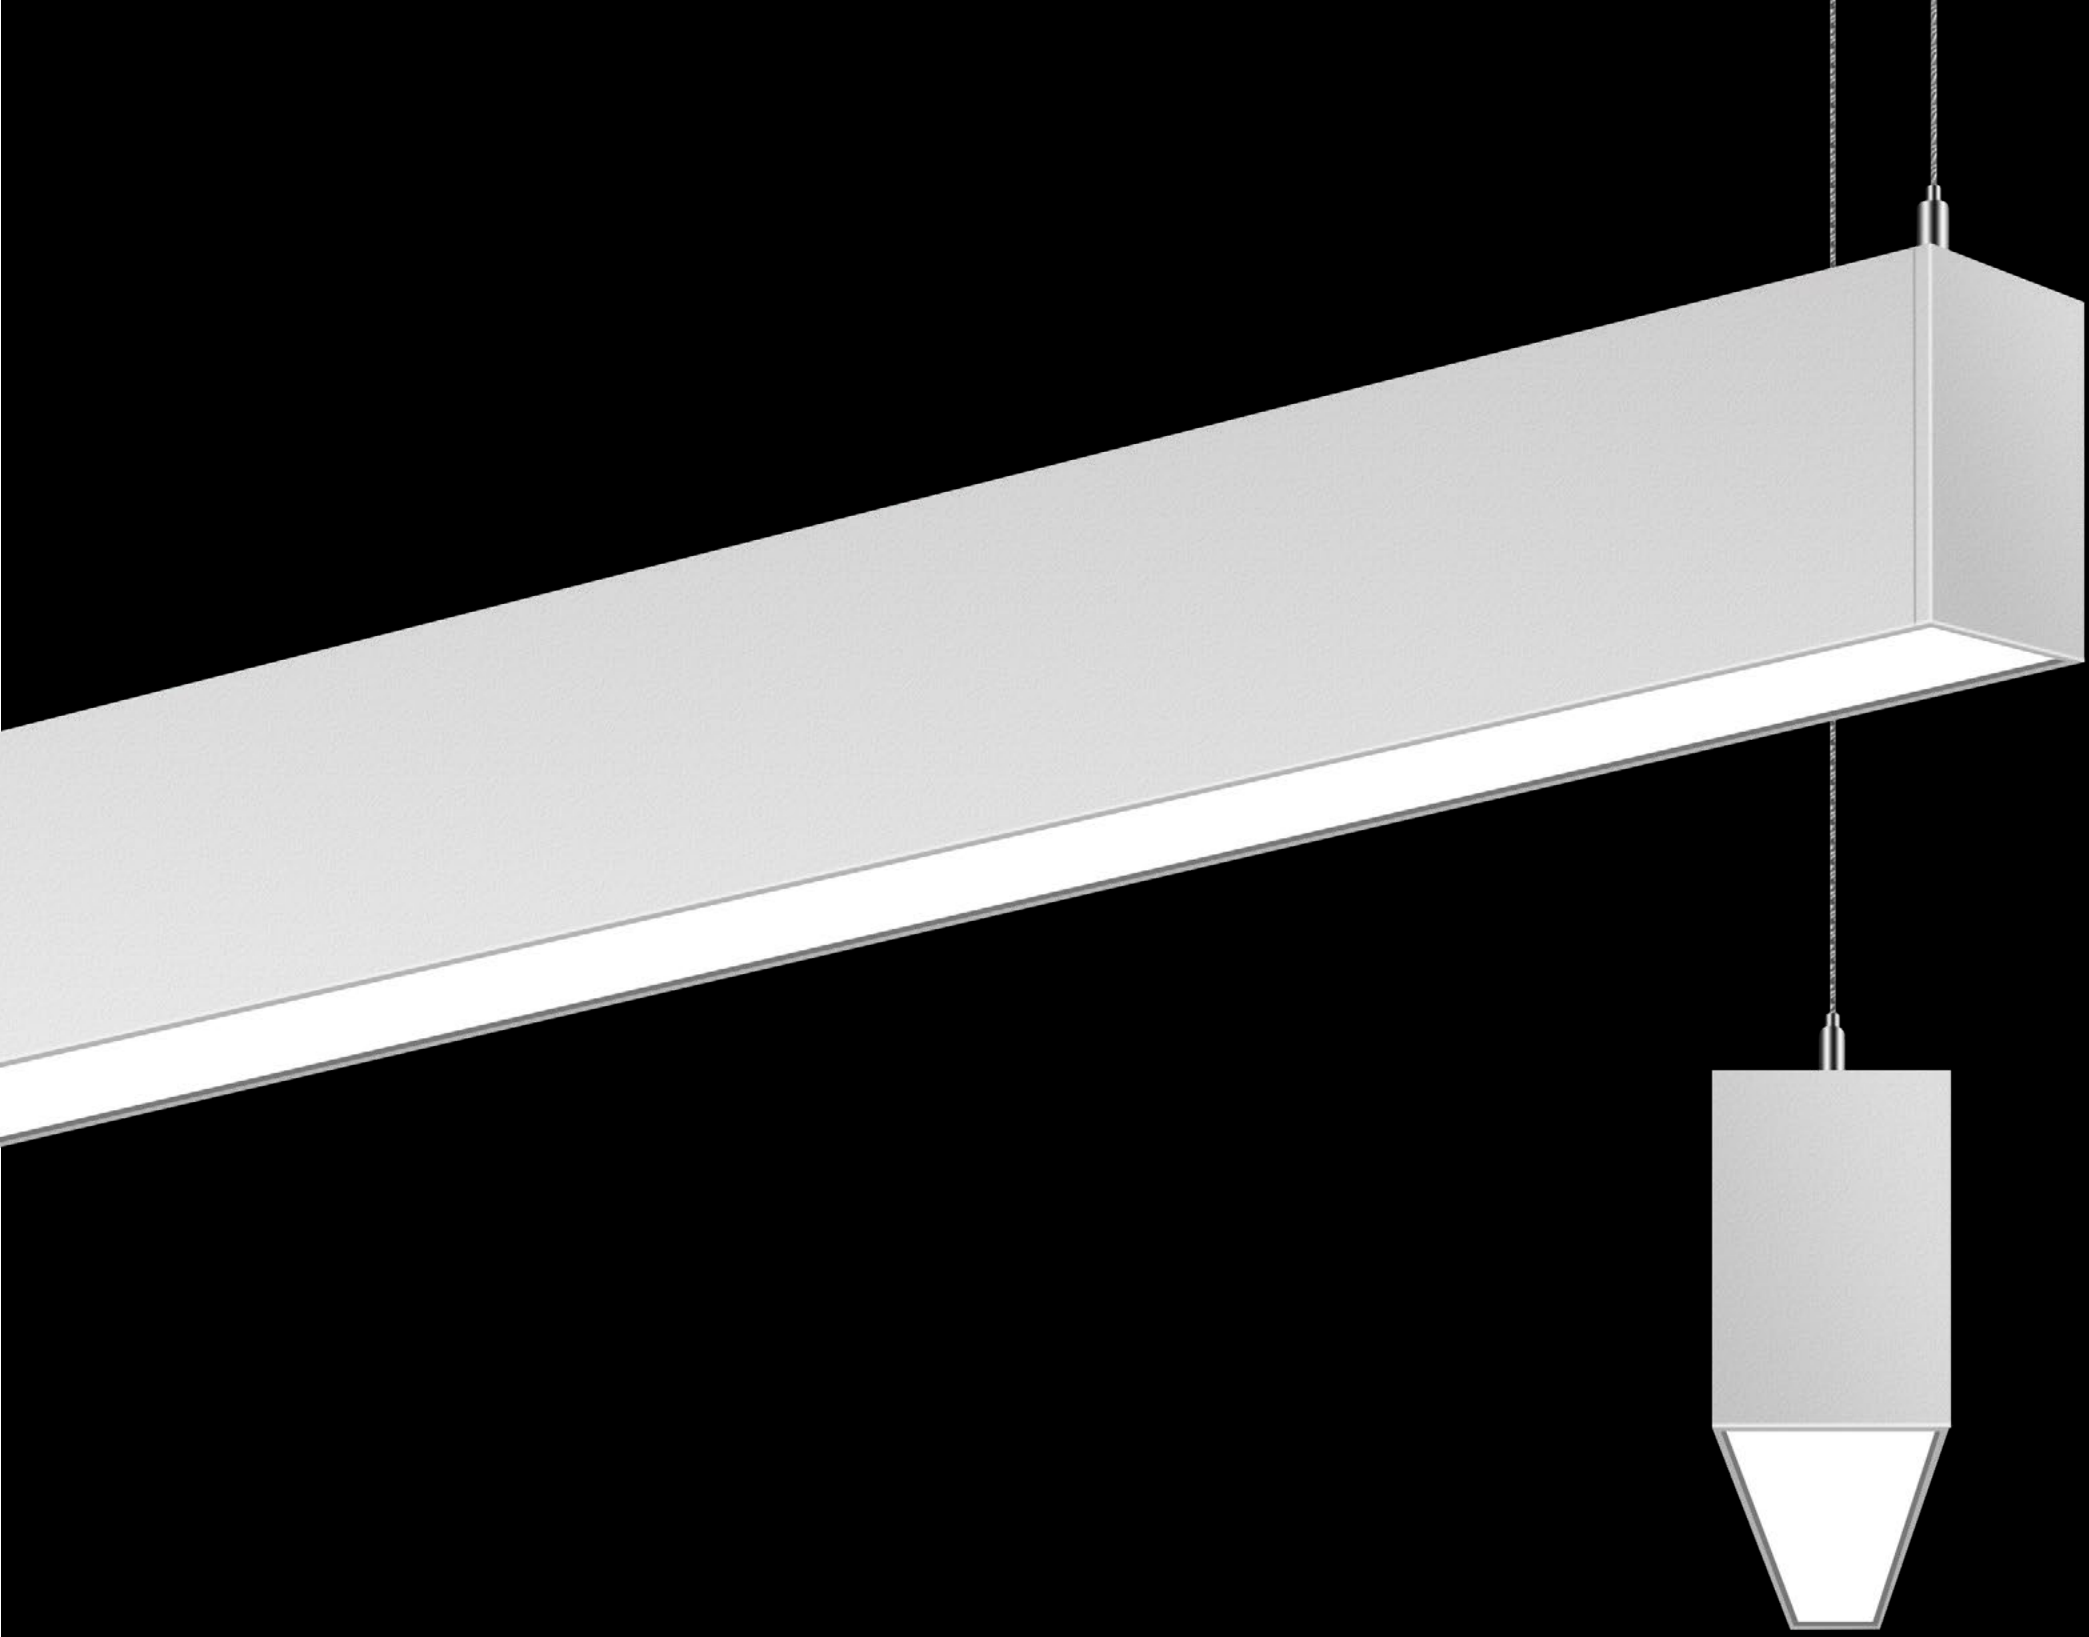

Combining superior esthetics, quality performance and unparalleled versatility, offers new opportunities to capture the beauty and benefits of true lighting.

Two sizes



Five optics

Nine illumination


Four mounting options

TWO SIZE



Two form sizes enabling designers to match the desired aesthetic for an interior space. All apertures are available in standard lengths of 2ft, 4ft and 8ft.

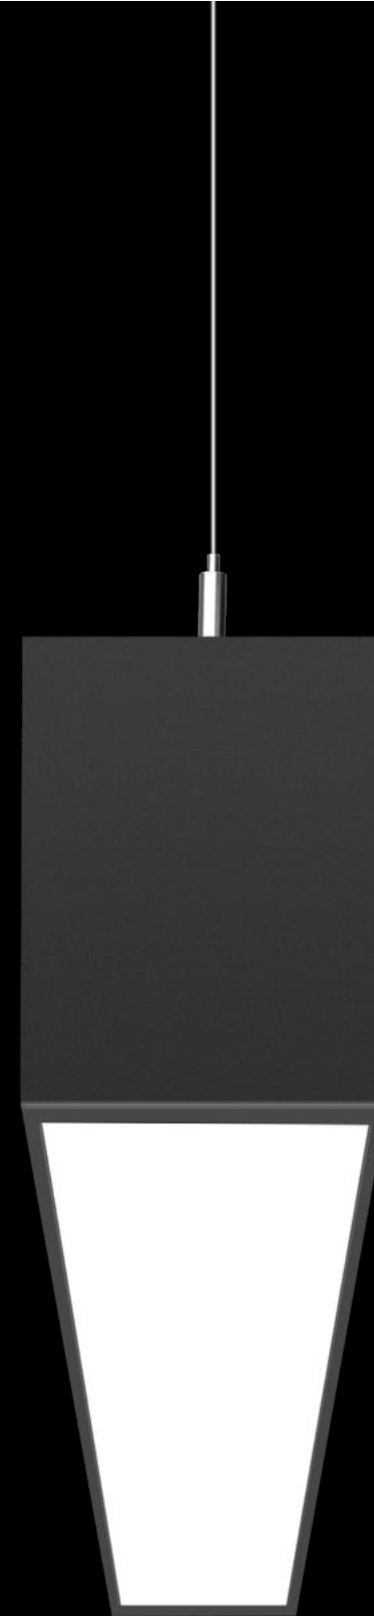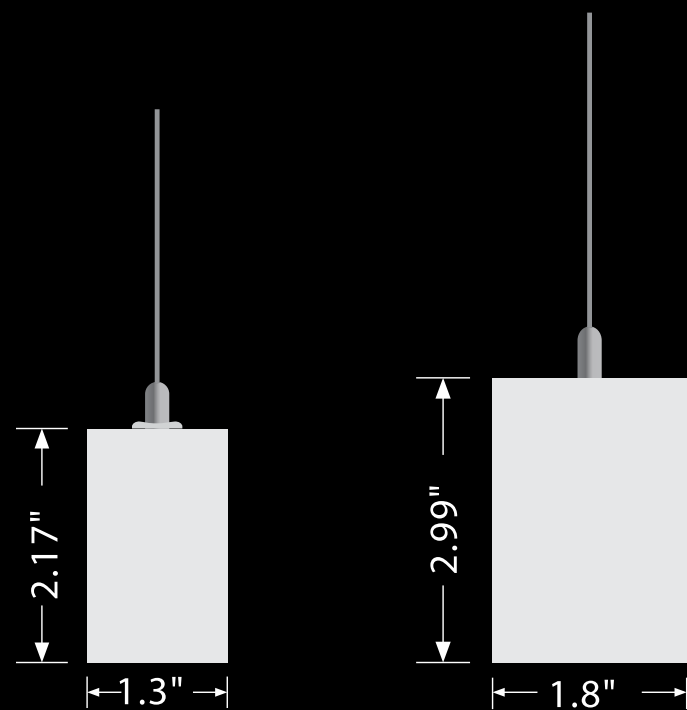

1.3"

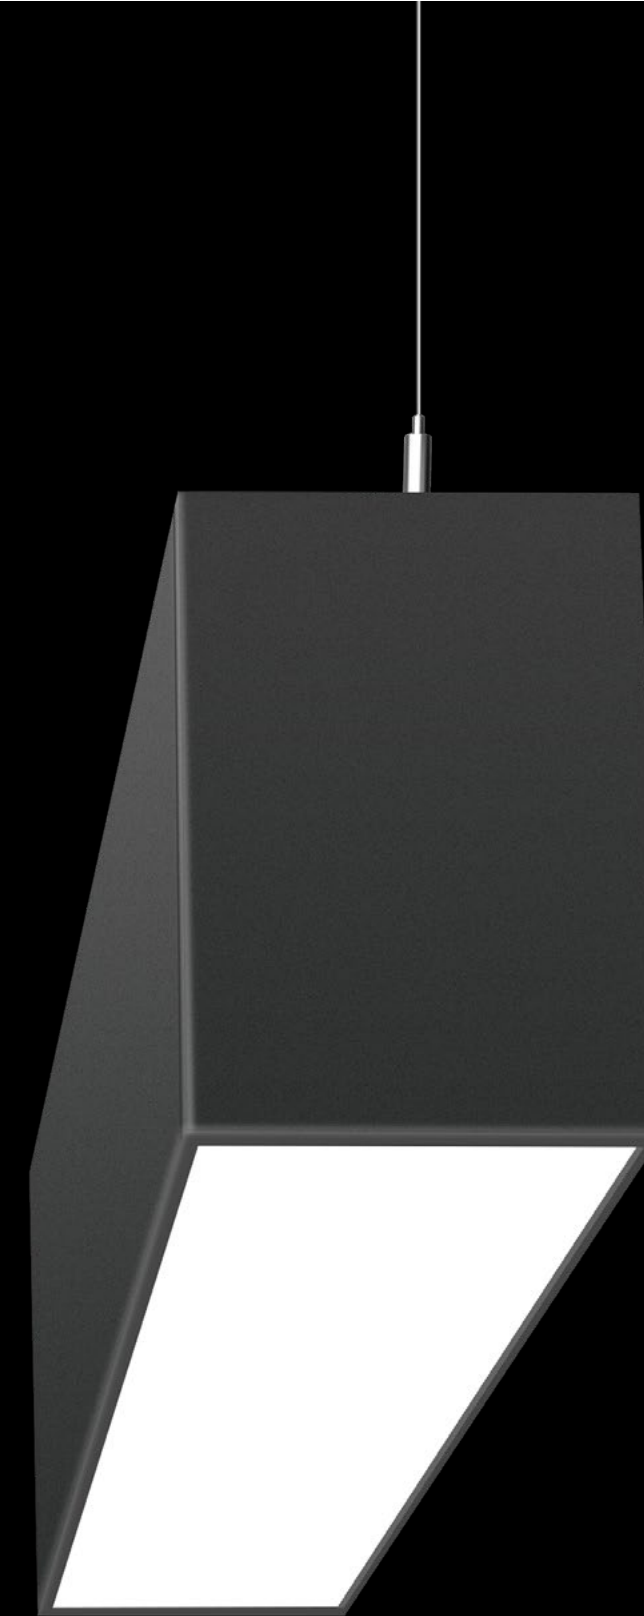

1.8"

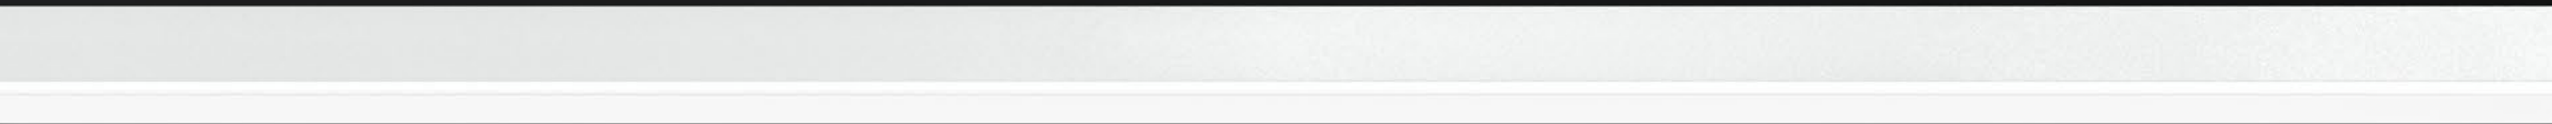
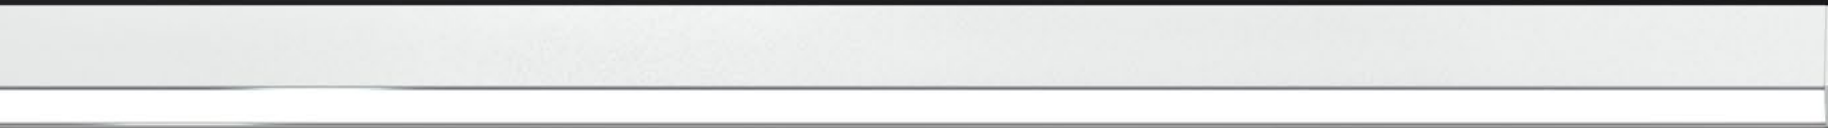


SIZE




Comes in lengths of 2', 4', and 8'


FIVE OPTICS

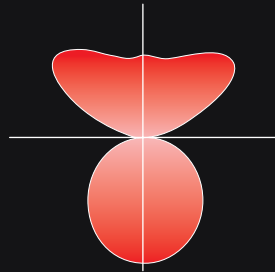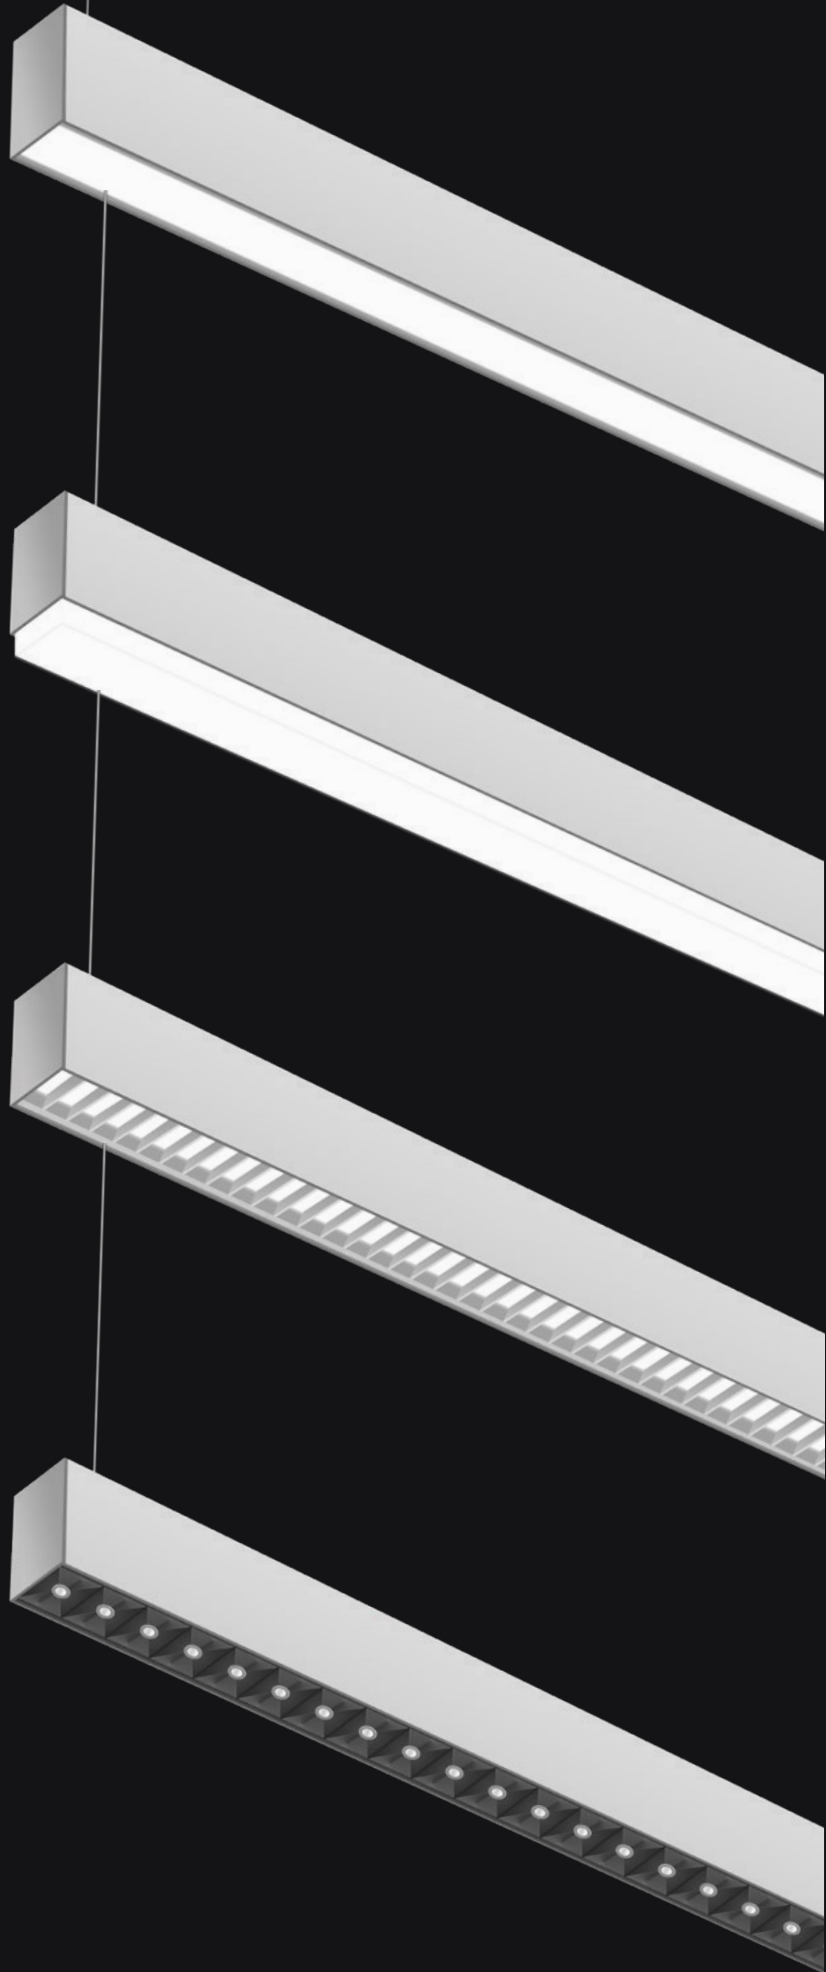


Diffuser (110°)

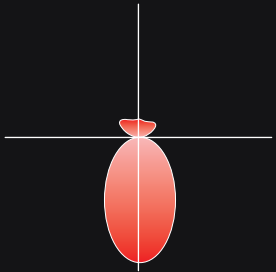


Louver (80°)

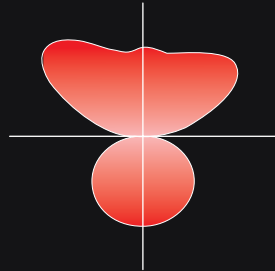

Convex (110°)

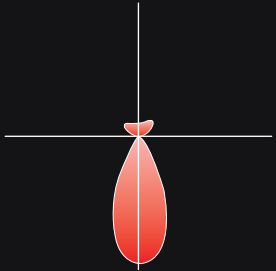


Micro Reflector (60°)
UGR<15

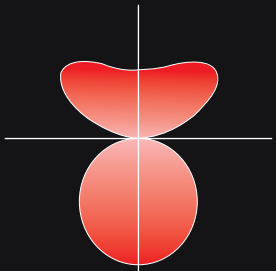


Deep Regressed (75°)


NINE ILLUMINATION




100% UP




90% Up, 10% Dn




75% Up, 25% Dn




70% Up, 30% Dn



50% Up, 50% Dn



30% Up, 70% Dn



25% Up, 75% Dn





10% Up, 90% Dn





100% Dn


FOUR MOUNTING OPTIONS

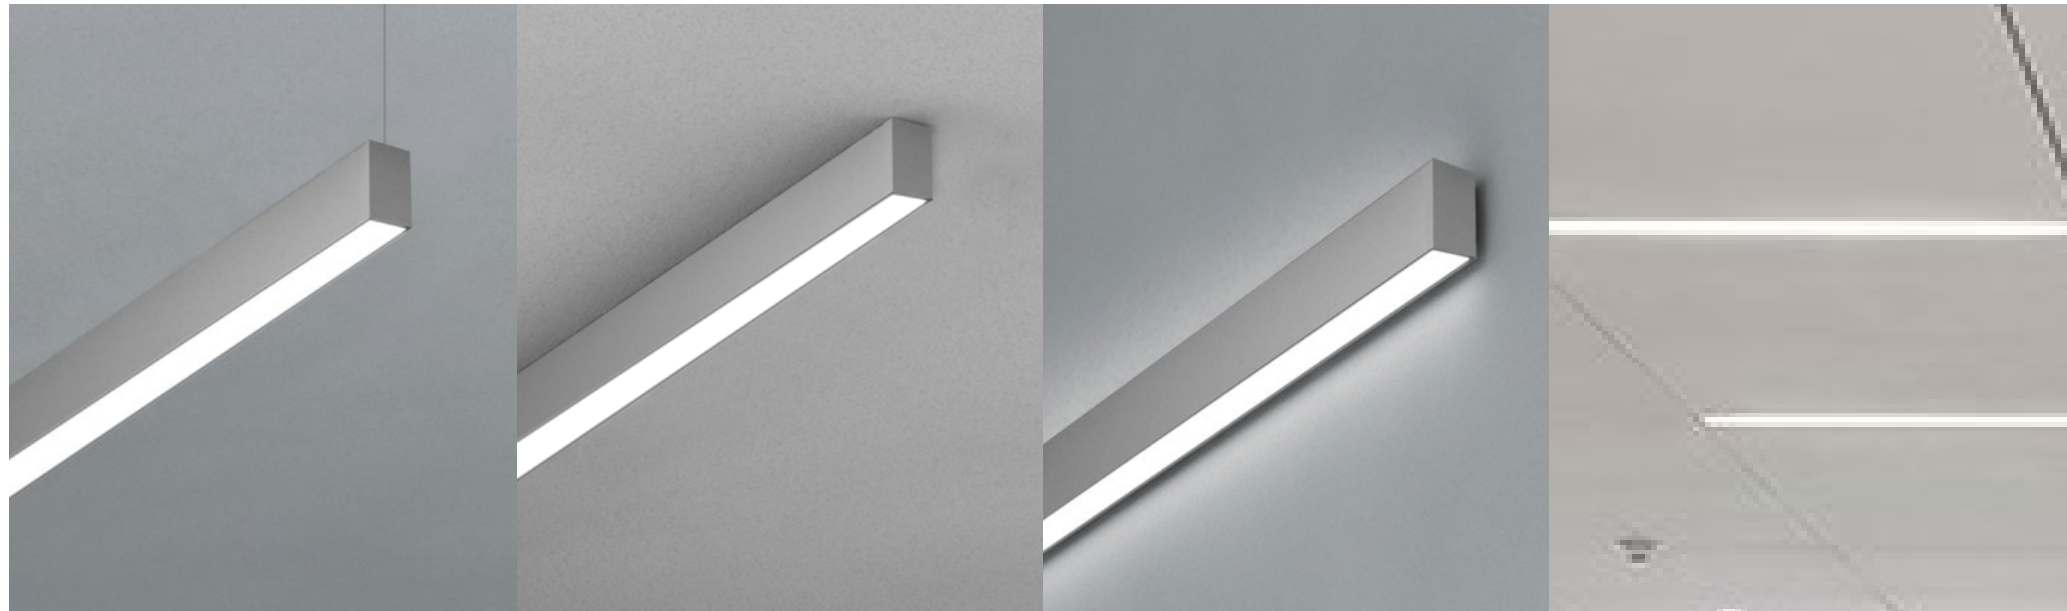


Pendant


Surface


Wall Mount



Recessed




L Design



U Design

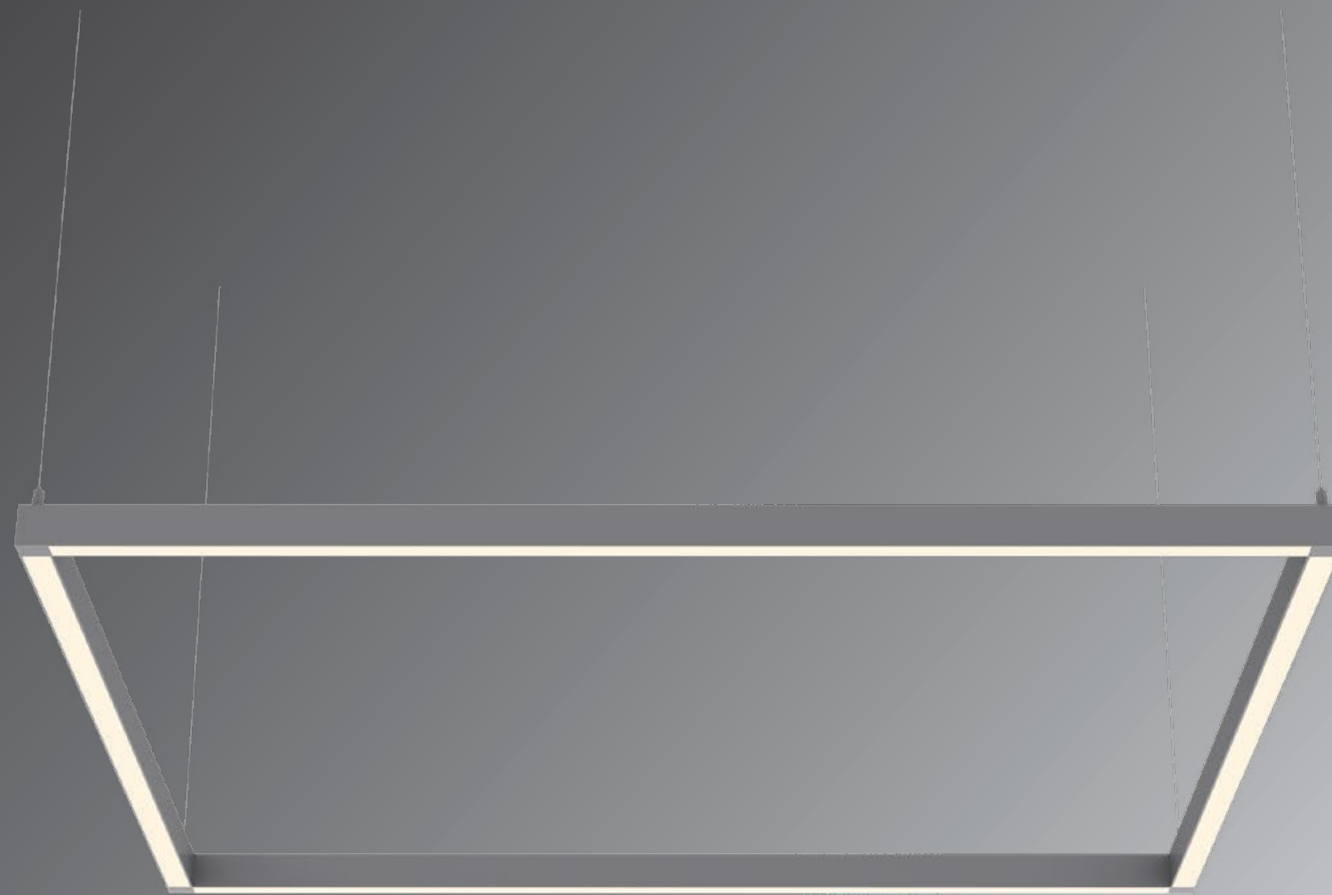

S Design



Available with several lit joiner accessories for unlimited lighting pattern design




X Design



L Design



Custom Design

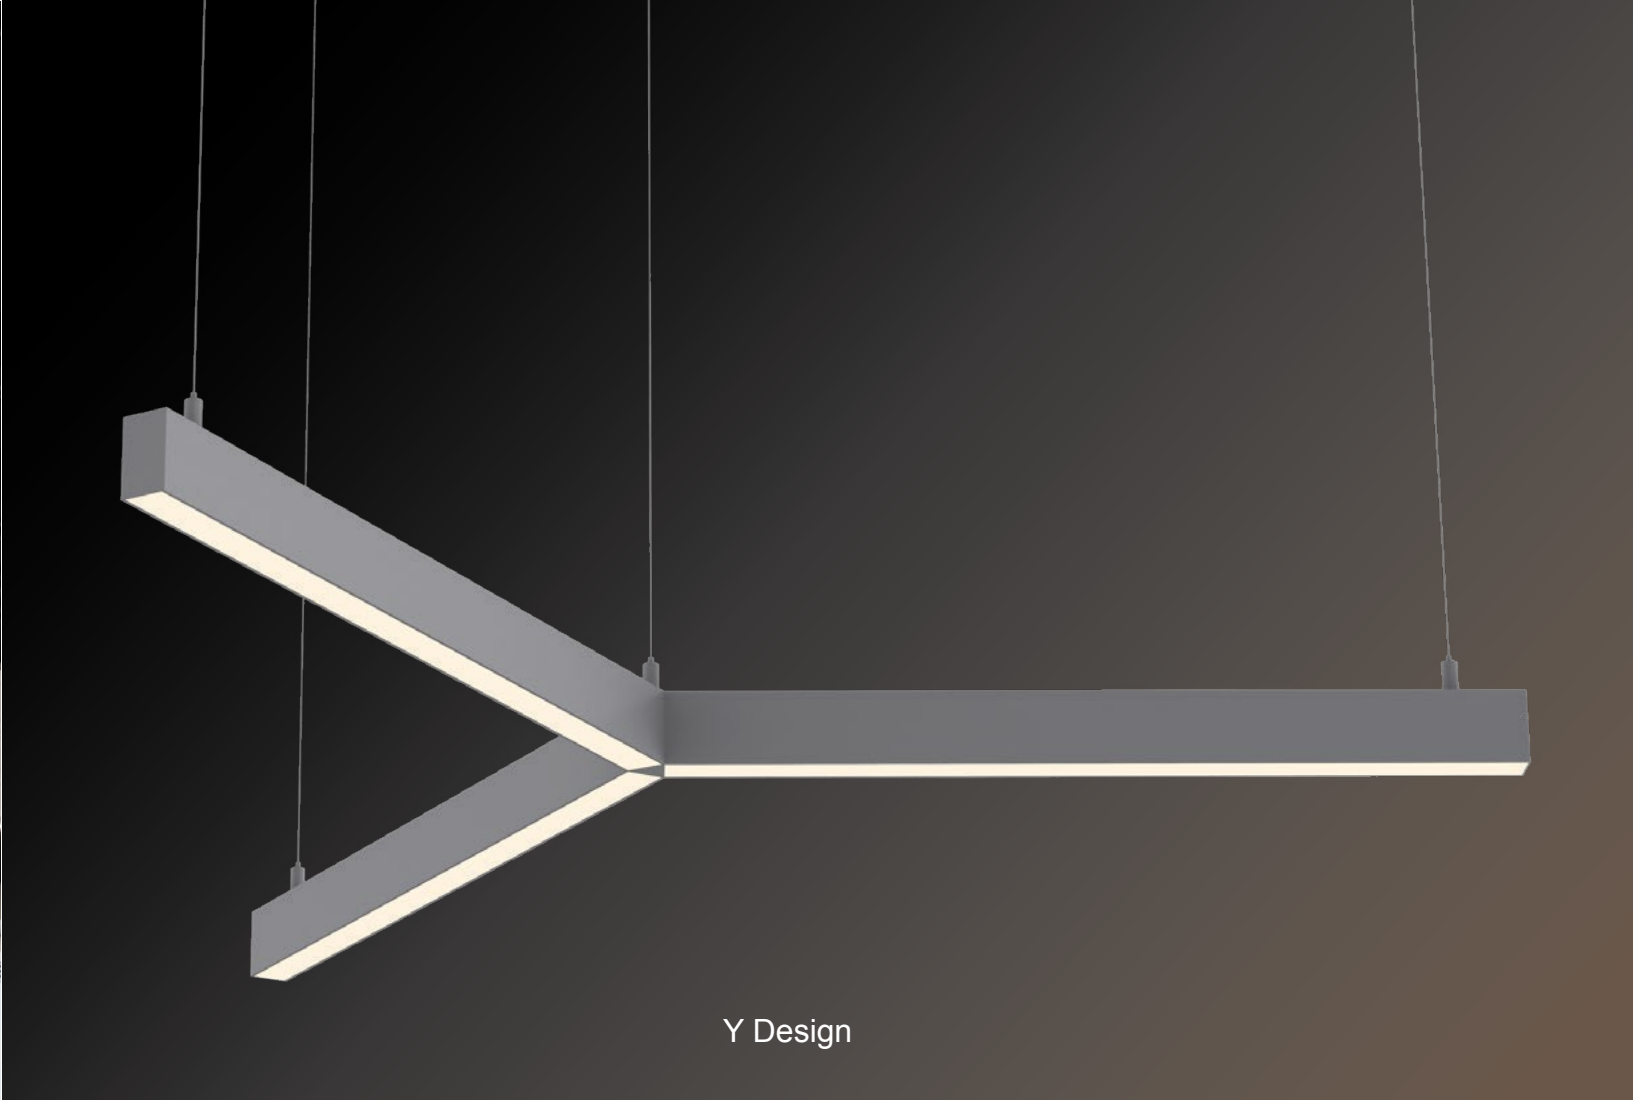


Y Design





CONTINUOUS RUN

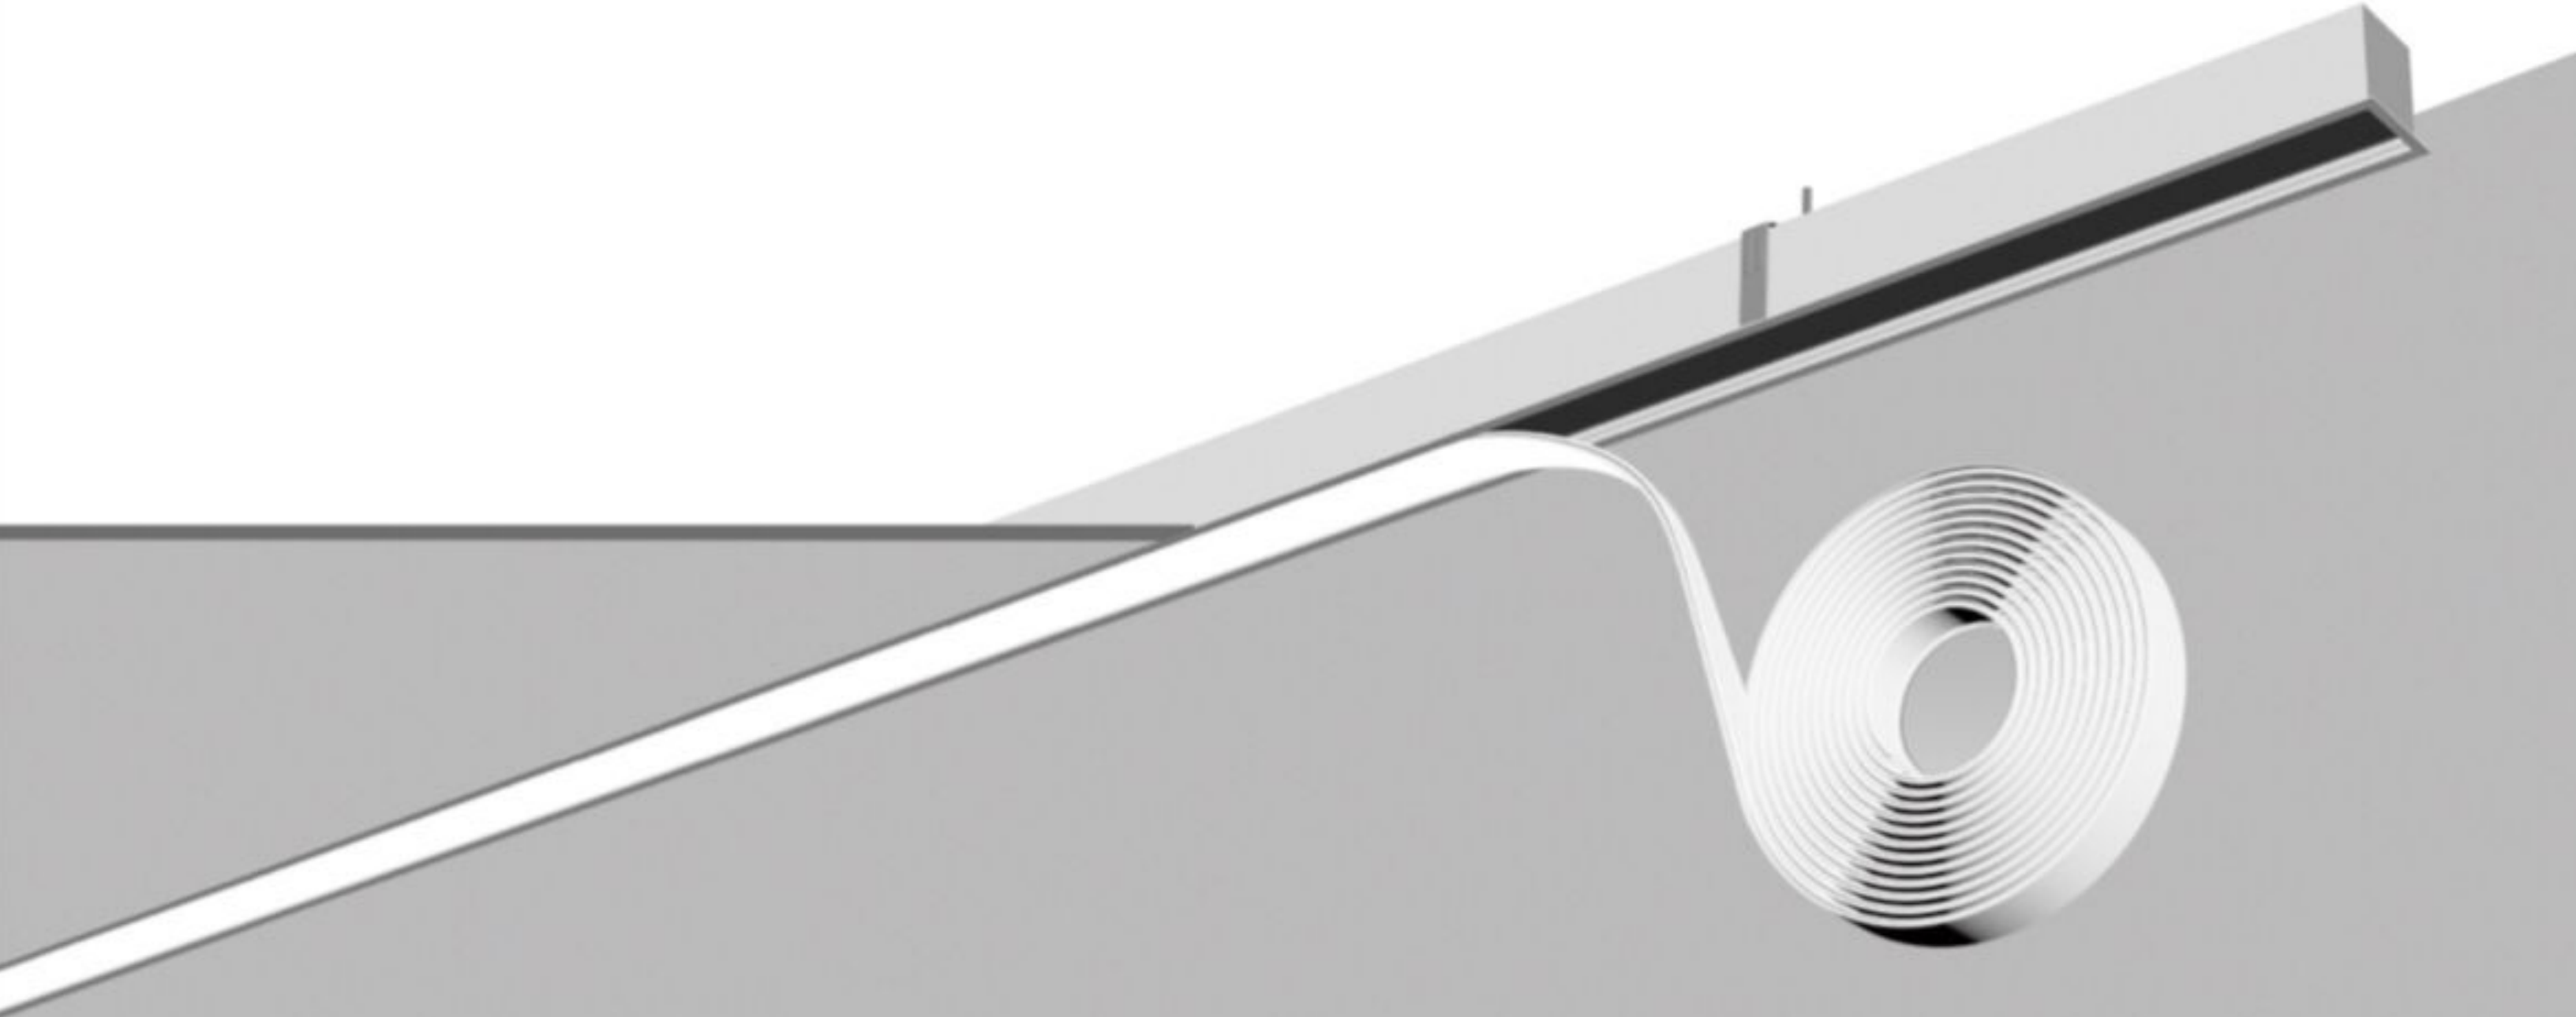




QUICK SUSPENDING


T-grid Or Dry Ceiling Compatible




Dry Ceiling / Off Grid
Various "Hard Ceilings"
(Mount to J-box)




Dry Ceiling / Off Grid
Suspending the luminaire in the T-grid.
Compatible for various T-grid, including
9/16" Flat, 9/16" Slot, 15/16" Flat...

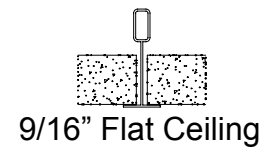


9/16" Flat Ceiling

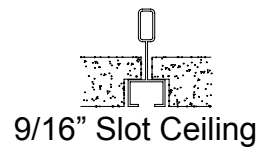

9/16" Slot Ceiling



15/16" Flat Ceiling

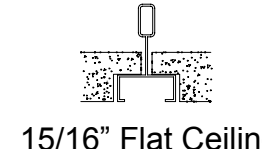

15/16" Flat Ceiling

*Please see the installation instruction for more details.

Canopy Style



1.6" Round
(Non Power Feed)




4.5" Round
(Power Feed)



4.5" Round With
Emergency Driver
(Non Power Feed)



5.8" Round With
Occupancy Sensor
(Power Feed)

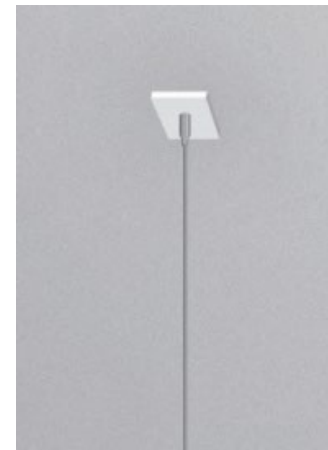

1.6" Square
(Non Power Feed)



4.5" Square
(Power Feed)



4.5" Square With
Emergency Driver
(Non Power Feed)


Magic LED Linear Light + Lutron ViVe



Wireless Connection to Luminaire



LRF2-DCRB-WH
RF Only Daylight Ceiling Sensor



LRF2-OCR2B-P-WH
RF Only Occupancy & Vacancy Ceiling Sensor

 MAG-PMK1 Pendant Mount Kit for Dry Ceiling (One set per fixture)	 MAG-PMK3 Pendant Mount Kit for Drop Ceiling (One set per fixture)	 MAG-LINE Line Shape Mount Bracket	 MAG-CROSS Cross Shape Mount Bracket	 MAG-T T Shape Mount Bracket
 MAG-L L Shape Mount Bracket	 MAG-Y Y Shape Mount Bracket	 MAG-Z Z Shape Mount Bracket	 MAG-ROL¹ Continuous Roll-Out Lens (43')	 MAG-MSW² Microwave Motion Sensor Kits for wall mount
 MAG-V V Shape Mount Bracket	 MAG-L L Shape Mount Bracket	 MAG-EBU³ Microwave Motion Sensor Kits	 RC-100 Remote Control for Microwave Motion Sensor	 MAG-Cover Plate Cover Plate kits for ceiling mount

Notes:

1. If the joined length exceeds 8ft, only continuous Roll-Out Lens can be used.
2. Microwave dimming sensor, for mounting height 20ft (6m) max. Dimming default setting is Bi-Level dim and dimming to 50%. Besides, daylight sensor default setting is disable. If need other dimming levels such as 10% or 30%, ON/OFF function and daylight sensor function, please consult with customer service in advance.
3. Emergency battery back-up is for ambient temperatures of 32°F -95°F (0 °C -35°C).



