



## THOE LED WALL LIGHT



### PRODUCT DESCRIPTION

The Thoe wall light is designed in an architecture minimalist cuboid shape. It combines die-cast aluminium structure and glass lens in one integral shape. Direct and indirect distributions. Suitable for both indoor and outdoor wall light applications.

### FEATURE


- Die-cast aluminum housing
- AC LED, without driver
- Clear glass lens
- Direct and indirect light
- IP65 for wet locations

### ELECTRICAL SYSTEM

- Input voltage: 120V
- 50/60Hz
- Power Factor: >0.97
- Working Temperature: -4-104°F (-20-40°C)

### SPECIFICATION

Net Weight: 4.47lbs (2.03kg)

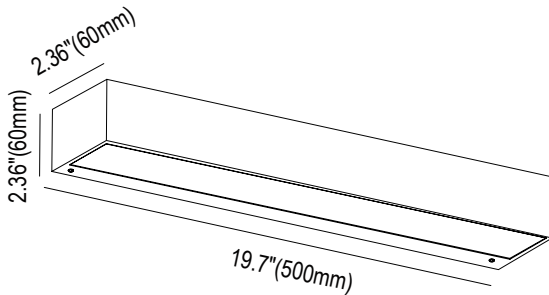

### Ordering Information

Example: TLID36304-BK

Name	Distribution	Watts	CCT	Voltage	Control	Finish
TL-Thoe Long	D - Direct	18 - 18W	30 - 3000K	4 -120	Blank - None	BK - Black
	ID- Indirect and Direct	36 - 36W				

Notice:

\* Black finish is standard. Additional charge will apply for custom color.

### PERFORMANCE

CRI

80

CCT

3000K

Dimming

Non dimming

Projected Lifetime

L70 -100,000 Hours

Working Temperature

-4-104°F (-20-40°C)


Certifications

- cETLus listed
- IP65 for wet locations
- RoHs compliant

## PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

Plane [50%Ang.] [10%Ang.]  
C180.0: 109.0 154.5



Direct and Indirect

## PERFORMANCE DATA

### LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Lumen Output	AC Input 120V	CCT	CRI
18	1060	0.15A	3000K	80
36	2160	0.30A	3000K	80

## BUG Rating

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory

Model	BUG Rating
TLID36304	B1-U5-G0



Direct Light



Direct and Indirect Light

## Warranty

Three year limited warranty.

Specifications subject to change without notice.