

# COPL COLUMN LIGHT



## PRODUCT DESCRIPTION

The COPL column led light has elegant, slim and column design. It brings architectural style to any area or site, impacting pedestrian-scale for improved comfort and security. High quality aluminum body, polycarbonate shade, moulded silicone gasket and stainless steel screws. This pole light is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.

## ELECTRICAL SYSTEM

- Input Voltage: 120-277VAC, 50/60Hz
- Operating temperature range: -22-104°F (-30-40°C)
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20% at full load

## PERFORMANCE

CRI

70

CCT

3000K, 4000K

Projected Lifetime

L70 - 100,000 Hours


Working Temperature

-22-104°F (-30-40°C)

Certifications

- cETL Listed
- IP65 rated
- RoHS compliant

## SPECIFICATION

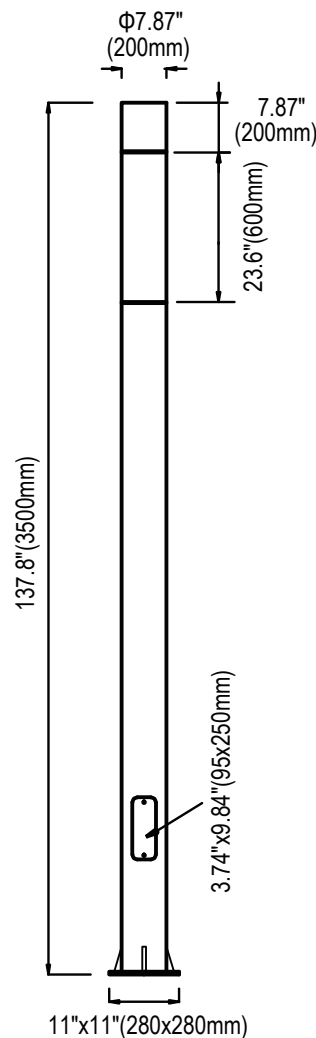

## Ordering Information


Example: COPL-30301-BK

Name	Watts	CCT	Voltage	- Control	- Finish
COPL	30 - 30W	30- 3000K 40- 4000K	1-120-277V	Blank - None	BK - Black  Optional Finish Colors (Need Additional Charge)*

Notice:

- \* The pole and anchor bolts need to be bought separately.
- \* Black finish is standard. Additional charges will apply for all the other colors. Please contact customer service for premium adder.

## ACCESSORIES (ORDER SEPARATELY)



### ABMK-COPL-3/4M

Anchor bolts mounting kits for 3 to 4 meters height pole M14x400mm

### ABMK-COPL-5/6M

Anchor bolts mounting kits for 4 to 5 meters height pole M16x500mm



### COPL-2.7POLE-BK

2.7 meters pole, black


### COPL-4.5POLE-BK

4.5 meters pole, black

\* Pole length and finish color can be customized.

## PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

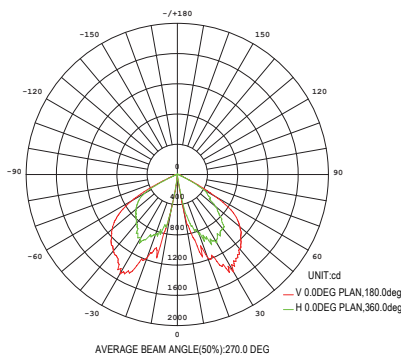

## PERFORMANCE DATA

### LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Watts	Lumen Output	CCT	CRI
30W	3400lm	4000K	70

## Warranty

Five year limited warranty.

Specifications subject to change without notice.