



aboveall.com

GEN 4.0 Linear High Bay

- Lumen output is up to 56,000lm
- Lengths available in 1.4ft, 1.9ft, 2.6ft and 3.7ft.
- 4000K and 5000K selectable
- Plug and play bi-level motion sensor available



DESCRIPTION


The GEN.4 LED Linear High Bay comes in a compact, lightweight and slim design. Available in 1.4ft, 1.9ft, 2.6ft and 3.7ft lengths with a lumen output of up to 56,000lm. Ideal for replacing an existing HID, fluorescent or induction lighting system for reduced maintenance costs. For use in light industrial applications such as workshops, warehouses, indoor stadiums, etc.

DIMENSIONS

1.4FT

100W,115W,135W


5.7 lbs

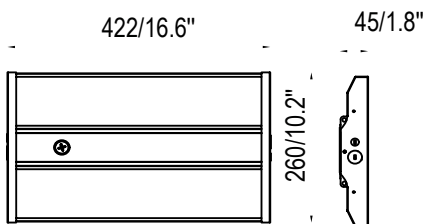

1.9FT

155W,185W,200W


7.3 lbs

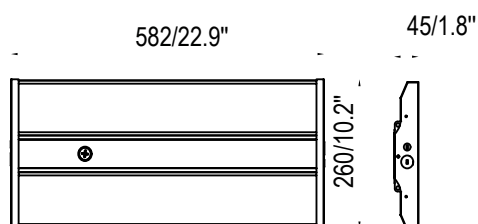

2.6FT

200W,230W,270W


10.4 lbs

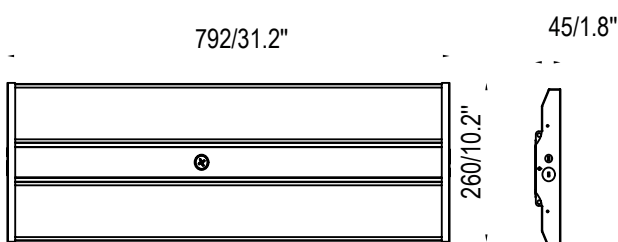

3.7FT

270W,340W,400W

13.7 lbs

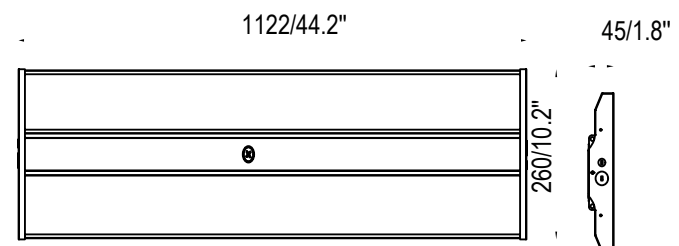



1.4ft



1.9ft



PERFORMANCE

Length	1.4ft
Input Watts (Nominal):	100W, 115W, 135W
Output Lumens (@5000K):	15900, 17700, 19900
Input Voltage:	120-277V, 50/60Hz
Beam Angle:	90°x95°
Lumen Per Watt:	159, 154, 147
CRI	>80
Working Temperature:	-4-104°F (-20-40°C)

Length	1.9ft
Input Watts (Nominal):	155W, 185W, 200W
Output Lumens (@5000K):	23400, 26600, 28000
Input Voltage:	120-277V, 50/60Hz
Beam Angle:	90°x95°
Lumen Per Watt:	150, 143, 140
CRI	>80
Working Temperature:	-4-104°F (-20-40°C)

Length	2.6ft
Input Watts (Nominal):	200W, 230W, 270W
Output Lumens (@5000K):	31000, 34700, 39700
Input Voltage:	120-277V, 50/60Hz
Beam Angle:	90°x95°
Lumen Per Watt:	155, 150, 147
CRI	>80
Working Temperature:	-4-104°F (-20-40°C)

Length	3.7ft
Input Watts (Nominal):	270W, 340W, 400W
Output Lumens (@5000K):	41600, 50000, 56000
Input Voltage:	120-277V, 50/60Hz
Beam Angle:	90°x95°
Lumen Per Watt:	153, 147, 140
CRI	>80
Working Temperature:	-4-104°F (-20-40°C)



- Plug and play bi-level motion sensor available



2.6ft



3.7ft

4000

5000K

CCT SELECTABLE



1135 Thomas Busch Highway,

Pennsauken, NJ 08110

866-222-8866

info@abovealllighting.com

©2024 ABOVE ALL all rights reserved