

PILLAR SQUARE POLE LIGHT



PRODUCT DESCRIPTION

The Pillar square led pole light is well constructed with high quality extruded aluminum, UV powder coated, featuring tempered safety glass, moulded silicone gasket and stainless steel screws. This impressive pole light is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.

ELECTRICAL SYSTEM

- Input Voltage: 120-277VAC, 50/60Hz
- Operating temperature range: -40-104°F (-40-40°C)
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20% at full load

SPECIFICATION

PERFORMANCE

CRI

80

CCT

2700K, 3000K, 4000K

Projected Lifetime


L70 - 100,000 Hours

Working Temperature

-40-104°F (-40-40°C)

Certifications

- cETL Listed
- IP65 rated
- RoHS compliant

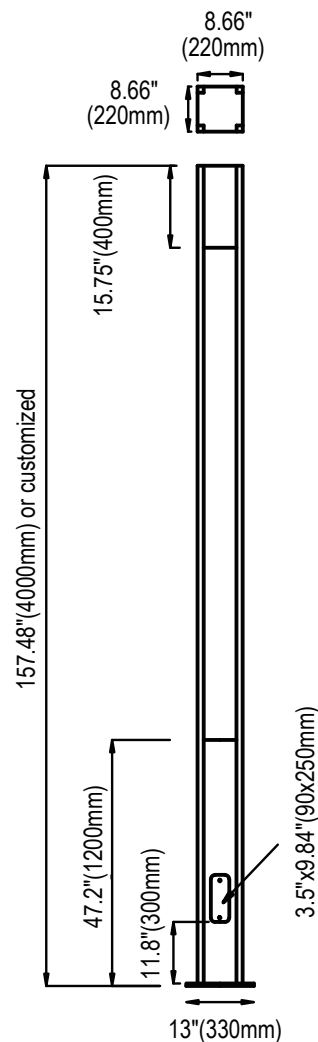

Ordering Information

Example: PSPL-6FT-4530801-BK

Name	Total Height	Watts	CCT	CRI	Voltage	- Control	- Finish
PSPL	6FT - 6 feet	45 - 45W	27- 2700K	80- CRI80	1-120-277V	Blank - None	- BK - Black
	13FT- 13 feet	55 - 55W	30- 3000K				
	15FT- 15 feet		40- 4000K				
	18FT- 18 feet						

Notice:

- * Height can be customized. Please check with Customer Service for more information.
- * Standard Finish is Black. Custom colors might be available at an additional fee. Please check with Customer Service for more information.

ACCESSORIES (ORDER SEPARATELY)



ABMK-PSPL-6T13FT

Anchor bolts mounting kits
for 6ft to 13ft pillar square pole light

ABMK-PSPL-15T18FT

Anchor bolts mounting kits
for 15ft to 18ft pillar square pole light

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Watts	Lumen Output	CCT	CRI
45W	3300lm	4000K	80
55W	4100lm	4000K	80

Warranty

Five year limited warranty.

Specifications subject to change without notice.