



The Donut LED Bollard features a sleek, slim design with fully shielded light distribution. Constructed with UV powder-coated, die-cast aluminum housing, a molded silicone gasket, and stainless steel screws, this bollard is an excellent choice for walkways, entrances, plazas, court-yards, driveways, bridges, and landscaped areas.

TECHNICAL DATA

Wattage	14W, 20W, 30W
CRI	80
CCT	3000K, 4000K
Driver	0-10V Dimming
Input Voltage	120-277V, 50/60Hz
Operating Temp.	-40°F to 104°F(-40°C to 40°C )
Certifications	cETL listed
	Suitable for wet location
	RoHS compliant
Power Factor	>0.9 at 120Vac
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65



FEATURES

- **Optimized Visual Comfort:** Shielded light distribution.
- **Versatile Application:** Ideal for a wide range of exterior spaces.
- **Premium Construction:** UV powder-coated die-cast aluminum body. Molded silicone gasket & stainless steel screws.


## SPECIFICATION

### Dimension


#### Side View

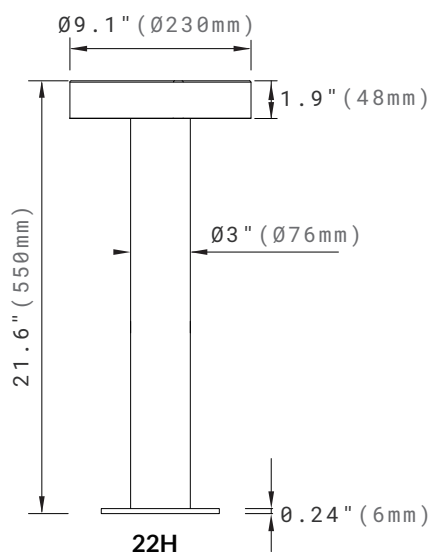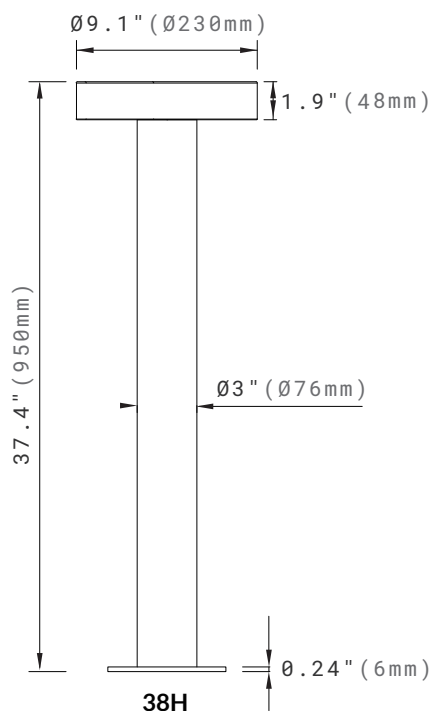

#### Base Plate

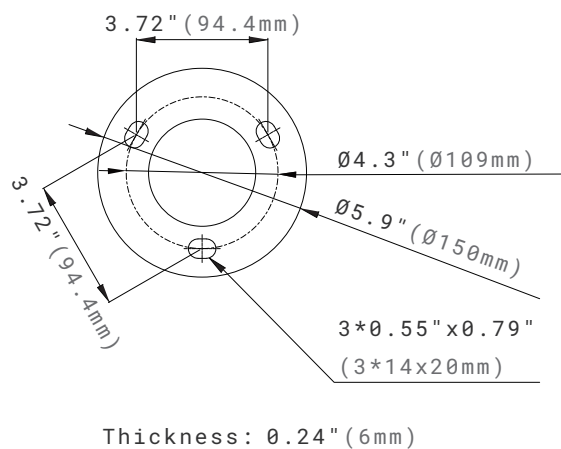

#### Anchor Bolts

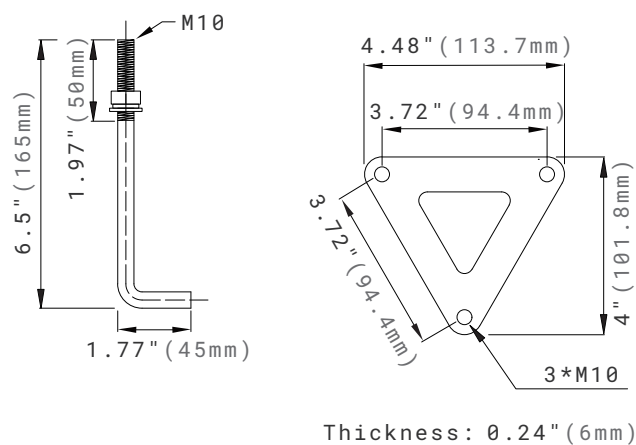

## ORDERING INFORMATION


EXAMPLE: DOBD38H-20401-BK

DOBD						
Series	Height	Wattage	CCT	Voltage	Control	Finish
DOBD Donut Bollard	<b>22H</b> 21.6" Height	<b>14</b> 14W	<b>30</b> 3000K	<b>1</b> 120-277V	<b>BLANK</b> On/Off	<b>BK</b> Black
	<b>38H</b> 37.4" Height	<b>20</b> 20W	<b>40</b> 4000K			<b>Custom Finish Colors<sup>1</sup></b> <i>Additional fees applied.</i>
		<b>30</b> 30W				

### NOTE:

1. The standard color is black finish; Custom finish colors are available at an additional charge. Please contact Customer Service for premium adder.

## ACCESSORIES (ORDERED SEPARATELY)



### ABMK-DOBD

Anchor Bolts Mounting Kits.


## PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	CRI	CCT
14W	1100lm	0.12A	80	4000K
20W	1580lm	0.17A	80	4000K
30W	2100lm	0.25A	80	4000K

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Result may vary per actual order.

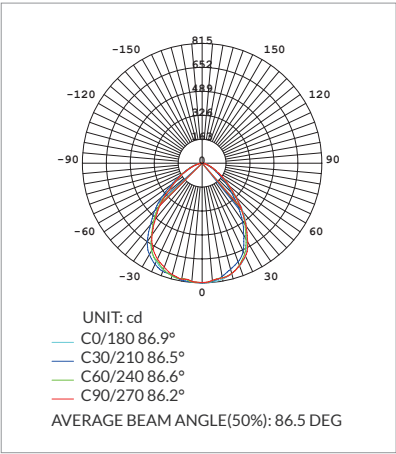

BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
DOBDXXH-14401	B1-U1-G0
DOBDXXH-20401	B1-U1-G0
DOBDXXH-30401	B1-U1-G0

WARRANTY

5 years limited warranty.  
Specifications subject to change without notice.