



**DARKSKY
APPROVED**
Reduces Light pollution
Certified by DarkSky.org

The Pillar Round LED bollard features a UV powder-coated, die-cast high-quality aluminum body with a molded silicone gasket and stainless steel screws. It offers selectable wattage and CCT. This bollard is an excellent choice for entrances, walkways, driveways, promenades, courtyards, bridges, plazas, and landscaped areas.

TECHNICAL DATA

Wattage	10W, 20W
CRI	80
CCT	3000K, 4000K
Dimming	Non-Dimming
Input Voltage	120-277V
Operating Temp.	-40°F to 104°F (-40°C to 40°C)
Certifications	cETL listed
	Suitable for wet location
	RoHS compliant
	DarkSky Approved for CCT of 3000K and below
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65



FEATURES

- **Versatile Application:** Ideal for a wide range of exterior spaces.
- **Premium Construction:** UV powder-coated die-cast aluminum body. Molded silicone gasket & stainless steel screws.

SPECIFICATION

Dimension

Side View

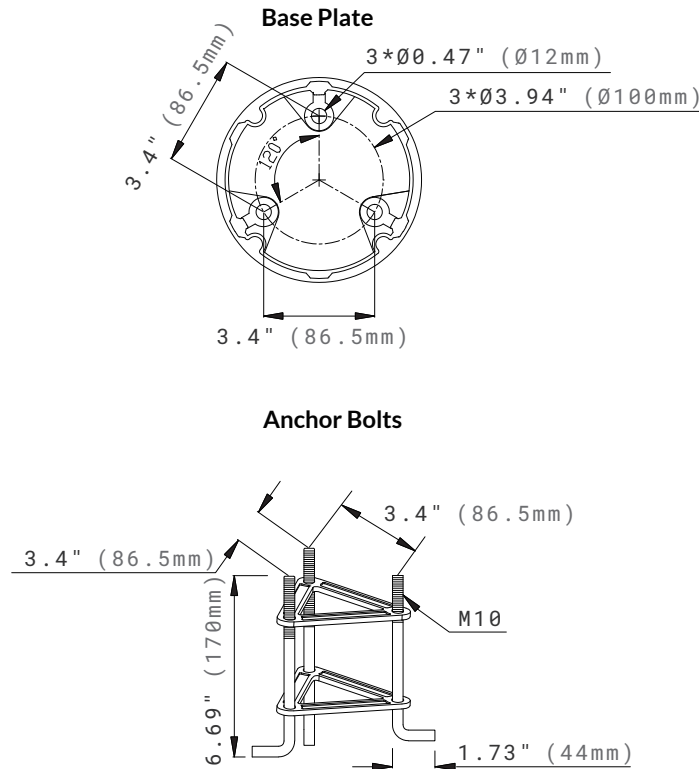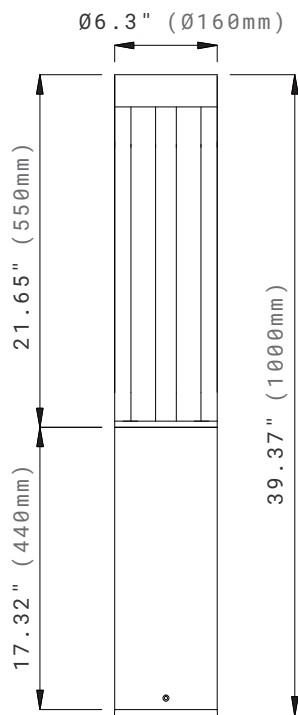

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	CRI	CCT
10W	520LM	0.09A	80	4000K
20W	1700LM	0.18A	80	4000K

ORDERING INFORMATION


EXAMPLE: PRBD40H-20401-BK

PRBD						
Series	Height	Wattage	CCT	Voltage	Control	Finish
PRBD Pillar Round Bollard	40H 39.4" Height	10 10W 20 20W	30 3000K 40 4000K	1 120-277V	BLANK On/Off	BK Black Optional Finish Colors¹ Custom Colors ¹ <i>Additional fees applied.</i>

NOTE:

1. The standard color is black finish; custom colors are available for an additional charge - please contact customer service for premium options.

ACCESSORIES (ORDERED SEPARATELY)




91306

ABMK-PRBD

Anchor Bolts Mounting Kits
for Pillar Round Bollard.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Result may vary per actual order.

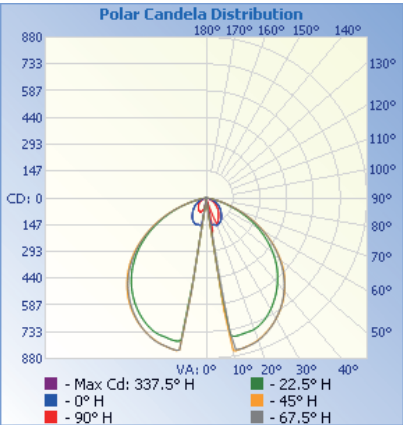

BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
PRBD-10301-BK	B0-U1-G0
PRBD-20301-BK	B1-U1-G0

WARRANTY

5 years limited warranty.
Specifications subject to change without notice.