



The Pillar Square LED bollard features a UV powder-coated, die-cast high-quality aluminum body with a molded silicone gasket and stainless steel screws. It offers selectable wattage and CCT. This bollard is an excellent choice for entrances, walkways, driveways, promenades, courtyards, bridges, plazas, and landscaped areas.

## TECHNICAL DATA

Wattage	Selectable 10W/15W/20W
CRI	80
CCT	Selectable 3000K/4000K/5000K
Dimming	Non-Dimming
Input Voltage	120-277V
Operating Temp.	-86°F to 104°F (-30°C to 40°C )
Certifications	cETL listed
	Suitable for wet location
	RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65


## FEATURES

- **Adjustable & Customizable:** Selectable wattage and selectable CCT.
- **Premium Construction:** UV powder-coated die-cast aluminum body. Molded silicone gasket & stainless steel screws.


## SPECIFICATION

### Dimension


Axonometric View

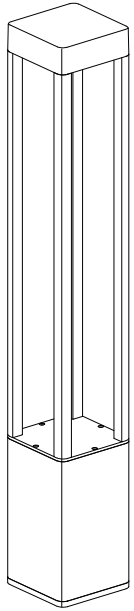


Side View

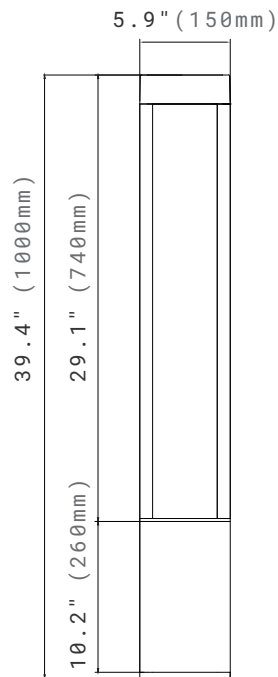

Top View



ANCHOR BOLTS

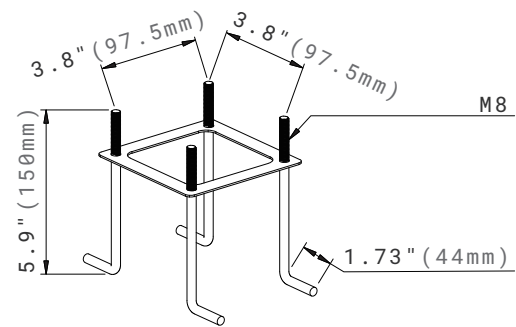

## PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	CRI	CCT
10W	1100LM	0.08A	80	3000K
15W	1500LM	0.13A	80	3000K
20W	2000LM	0.17A	80	3000K

## ORDERING INFORMATION


EXAMPLE: PSBD40H-SP-SW1-BK

PSBD						
Series	Height	Wattage	CCT	Voltage	Control	Finish
PSBD Pillar Square Bollard	40H 39.4" Height	SP <sup>1</sup> Selectable <sup>1</sup> 10W 15W 20W	SW <sup>2</sup> Selectable <sup>2</sup> 3000K 4000K 5000K	1 120-277V	BLANK On/Off	BK Black  <b>Optional Finish Colors<sup>3</sup></b> Custom Colors <sup>3</sup> <i>Additional fees applied.</i>

### NOTE:

1. 20W is the default setting.
2. 3000K is the default setting.
3. The standard color is black finish; custom colors are available for an additional charge - please contact customer service for premium options.

## ACCESSORIES (ORDERED SEPARATELY)



### ABMK-PSBD

Anchor Bolts Mounting Kits.

## BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
PSBD 10W 3000K	B1-U1-G0
PSBD 10W 4000K	B1-U1-G0
PSBD 10W 5000K	B1-U1-G0
PSBD 15W 3000K	B1-U1-G0
PSBD 15W 4000K	B1-U1-G0
PSBD 15W 5000K	B1-U1-G0
PSBD 20W 3000K	B1-U1-G0
PSBD 20W 4000K	B1-U1-G0
PSBD 20W 5000K	B1-U1-G0

## WARRANTY

5 years limited warranty.

Specifications subject to change without notice.

Ref#: 20250516