



GRA LED WALL PACK



PRODUCT DESCRIPTION

The GRA selectable dark sky wall pack features cutoff distribution in traditional appearance. Die-cast aluminum housing with integrated heat sink for superior heat dissipation, and options for Emergency back-up, photocontrol, and sensor. It is an ideal option for landscape, wall/ surface, low level pathway, apartment buildings, schools, and multi-use facilities.

FEATURES

- Wattage selectable
- CCT selectable
- Cutoff distribution design
- Emergency back up, photocontrol and sensor available

ELECTRICAL SYSTEM

- Input voltage: 120-277V
- 50/60Hz
- Power Factor: >0.9
- Total Harmonic Distortion: <20% at full load

PERFORMANCE

CRI

70

CCT

3000K, 4000K, 5000K

Projected Lifetime

L70 -100,000 Hours


Working Temperature

-40 - 104°F (-40 - 40°C)

Certifications

- cUL listed
- Suitable for wet locations
- RoHS compliant

DIMENSION

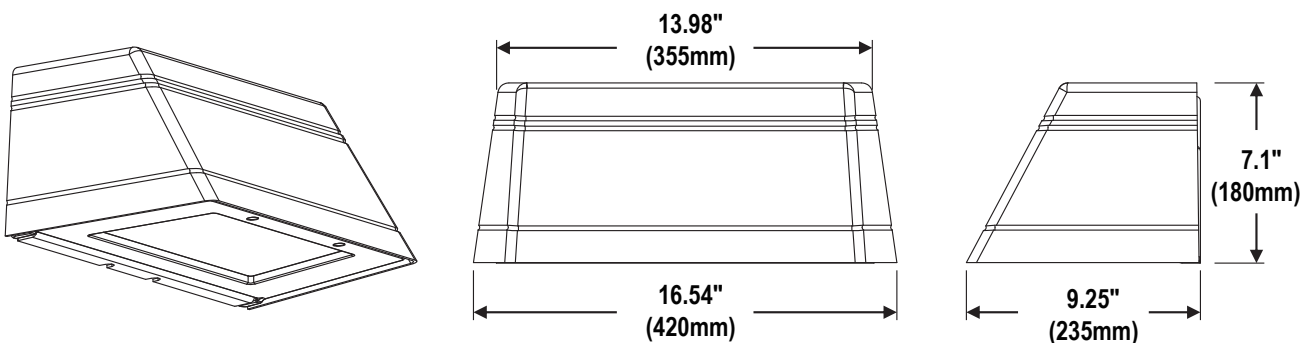

Ordering Information

Example: GRA-SPSW1-FT

Ref#: 20250616

Name	Watts	CCT	Voltage	- Control	- Distribution	- Finish
GRA	SP - 25W/45W/65W selectable ¹	SW - 3000K 4000K 5000K Selectable ²	1-120-277V	Blank - None PC - Photocontrol MS - PIR Sensor ³ EBU - Emergency Battery Backup ⁴	FT - Forward Throw	Blank - Bronze


Notice:

1. 45W is default setting.
2. 4000K is default setting.
3. Mounting height is 40ft (12m) max. Please check the last page for more sensor setting information.
4. Ambient working temperature for Emergency battery backup is 32°F -104°F (0 °C -40°C).

* Bronze finish is standard. Custom colors are available at an additional charge.

PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

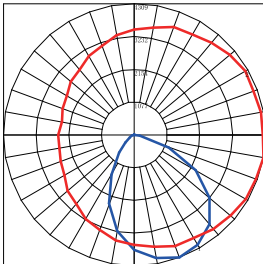

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Watts	Lumen Output	AC Input 120V	CCT	Distribution	CRI	LPW
25W	3250	0.21A	4000K	Wide Throw	>70	130
45W	5850	0.37A	4000K	Wide Throw	>70	130
65W	8500	0.54A	4000K	Wide Throw	>70	130

WARRANTY

Five year limited warranty.

Note: Specifications subject to change without notice.