



The OFM Outdoor Flush Mount Light comes in round and square shapes. Body and bracket in die-cast aluminum. Powder coated with pretreatment plus silicon rubber gasket for outdoor use. Simple and elegant appearance is ideal for general illumination for residential and commercial applications such as porches, covered walkways and store entrances.

TECHNICAL DATA

Wattage	18W
CCT	3000K
Dimming	Non-Dimming
CRI	80
Input Voltage	120V, 50Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598
	Cert. to CSA Std. C22.2 No.250.0
	RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	IP54 suitable for wet locations


FEATURES

- Die-cast aluminum body and polycarbonate lens.
- Round and square shape optional.
- Driverless design.
- Ceiling and wall surface mounted.
- Suitable for wet locations.


SPECIFICATION

Dimension

Round

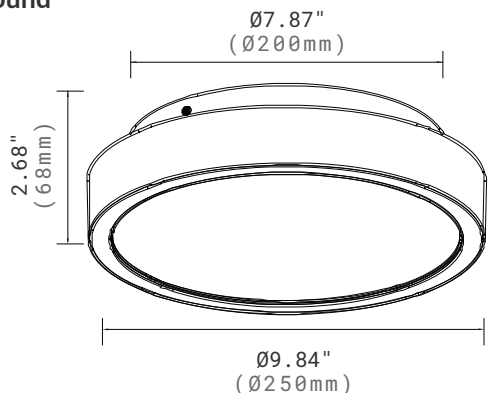

Square

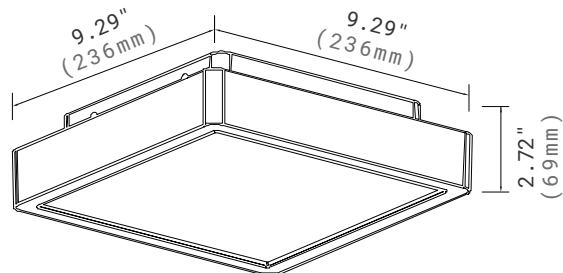

ORDERING INFORMATION

EXAMPLE: OFMR18304-WH

OFMR						
Series	Shape	Wattage	CCT	Voltage	Control	Finish
OFMR	R Round	18 18W	30 3000K	4 120V	BLANK On/Off	WH White standard
	S Square					Optional ¹ BK Black SL Sliver GR Graphite RU Rusty (See Notes)

NOTE:

- White finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

Housing Colors



White
(RAL9003)



Graphite
(RAL7024)



Black
(RAL7021)




Silver
(422C)



Rusty

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Result may vary per actual order.

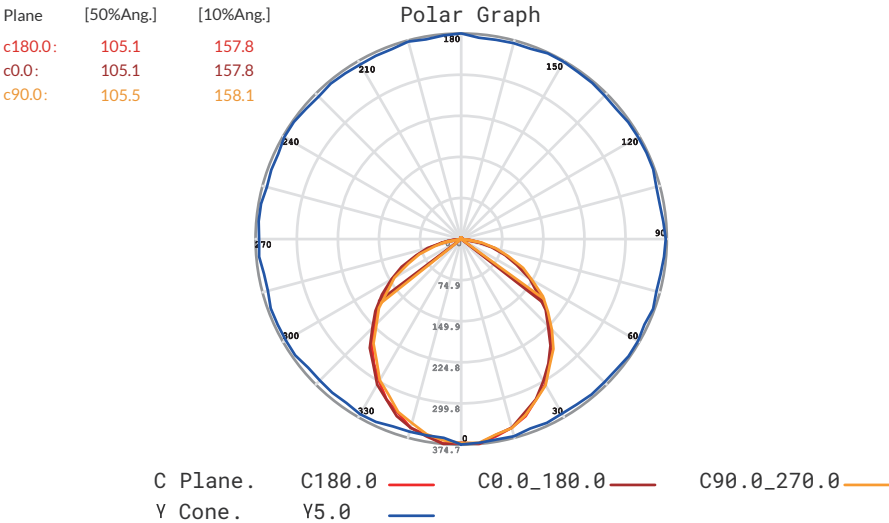

PERFORMANCE DATA

Lumen Output

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	Shape	AC Input 120V	CCT	CRI
18W	900lm	Round	0.15A	3000K	80
18W	800lm	Square	0.15A	3000K	80

WARRANTY

3 year limited warranty.
Specifications subject to change without notice.

Ref#: 202506027