



The surface mounted Villa LED Wall Light combines galvanized steel with durable powder coat paint in architectural grille style and milky polycarbonate lens. The Villa LED Wall Light is sealed with a silicone gasket and enables soft light distribution. It is designed for exterior wall mount applications such as villa, courtyard garden, and public squares.

TECHNICAL DATA


| | |
|----------------------------|--------------------------------|
| Wattage | 11W, 18W, 29W |
| CCT | 3000K |
| Drive | Non-Dimming |
| CRI | 90 is standard |
| Input Voltage | |
| 11W | 120-277V, 50/60Hz |
| 18W/29W | 120-347V, 50/60Hz |
| Projected Lifetime | L70-100,000 Hours |
| Operating Temp. | -40°F to 104°F (-40°C to 40°C) |
| Certifications | SGS Listed |
| | Suitable for wet locations |
| | RoHS compliant |
| Power Factor | >0.9 |
| Harmonic Distortion | <20% at full load |

FEATURES

- Architectural grille style and milky polycarbonate lens enables soft light distribution.
- Wide voltage 120-347V available for 18W and 29W.
- Sealed decorative housing suitable for wet locations.
- Easy-mount back plate.
- Cold temperature rated.

SPECIFICATION

Dimension

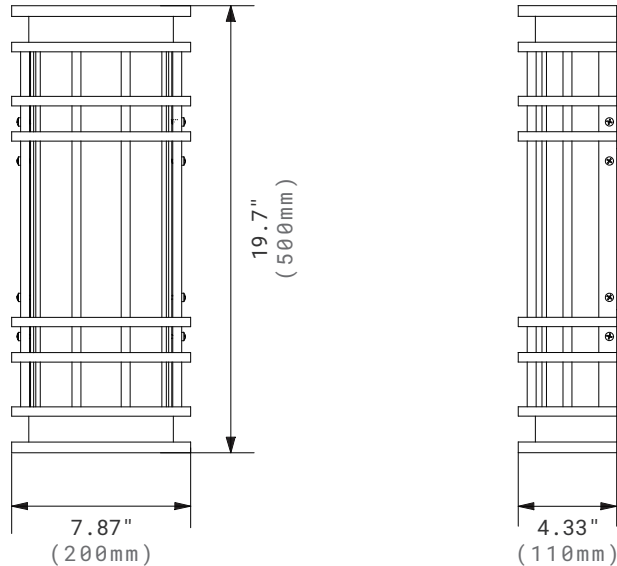

ORDERING INFORMATION

EXAMPLE: VWPM18308


| VWP | | | | | | |
|------|------------------|-----------|------------------|----------------------------|-----------------|---------------------------------------|
| Name | Dimension | Wattage | CCT | Voltage | Control | Finish |
| VWP | M Middle Size | 11 11W | 30 3000K 90Ra | 1 120-277V ¹ | BLANK On/Off | BK ² Black ² |
| | | 18 18W | 30 3000K 90Ra | 8 120-347V ¹ | | |
| | | 29 29W | | | | |

NOTE:

- 120V-277V is for 11W; 120-347V is for 18W and 29W.
- Black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.
- Minimum order required, please contact Customer Service for additional information.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Result may vary per actual order.

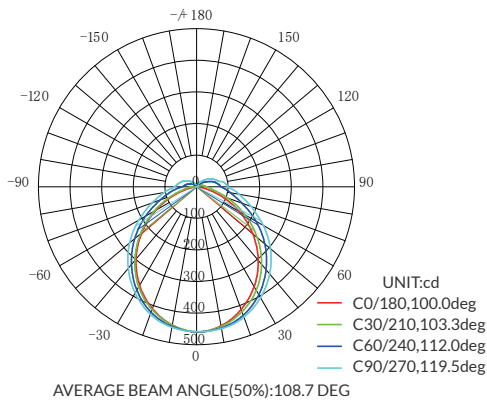

PERFORMANCE DATA

Lumen Output

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

| Wattage | Lumen Output | AC Input 120V | CCT | CRI |
|---------|--------------|------------------|-------|-----|
| 11W | 710lm | 0.09A | 3000K | 90 |
| 18W | 1130lm | 0.15A | 3000K | 90 |
| 29W | 1780lm | 0.24A | 3000K | 90 |

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperature from -40°F to 104°F (-40°C to 40°C).

| Ambient | | Multiplier |
|---------|------------|------------|
| Celsius | Fahrenheit | |
| 0 | 32 | 1.06 |
| 10 | 50 | 1.03 |
| 20 | 68 | 1.01 |
| 25 | 77 | 1.00 |
| 30 | 86 | 0.99 |
| 40 | 104 | 0.97 |

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.