



The GRA Selectable Dark Sky Wall Pack features cutoff distribution in traditional appearance. Die-cast aluminum housing with integrated heat sink for superior heat dissipation, and options for emergency back-up, photocontrol, and sensor. It is an ideal option for landscape, wall/surface, low level pathway, apartment buildings, schools, and multi-use facilities.

TECHNICAL DATA


| | |
|---------------------|--------------------------------|
| Wattage | Selectable 25W/45W/65W |
| CCT | Selectable 3000K/4000K/5000K |
| Dimming | Non-Dimming |
| CRI | 70 |
| Input Voltage | 120-277V, 50/60Hz |
| Projected Lifetime | L70-100,000 Hours |
| Operating Temp. | -40°F to 104°F (-40°C to 40°C) |
| Certifications | cUL listed |
| | RoHS compliant |
| | Suitable for wet location |
| Power Factor | >0.9 |
| Harmonic Distortion | <20% at full load |

FEATURES

- Wattage selectable.
- CCT selectable.
- Cutoff distribution design.
- Emergency back-up, photocontrol and sensor available.

SPECIFICATION

Dimension

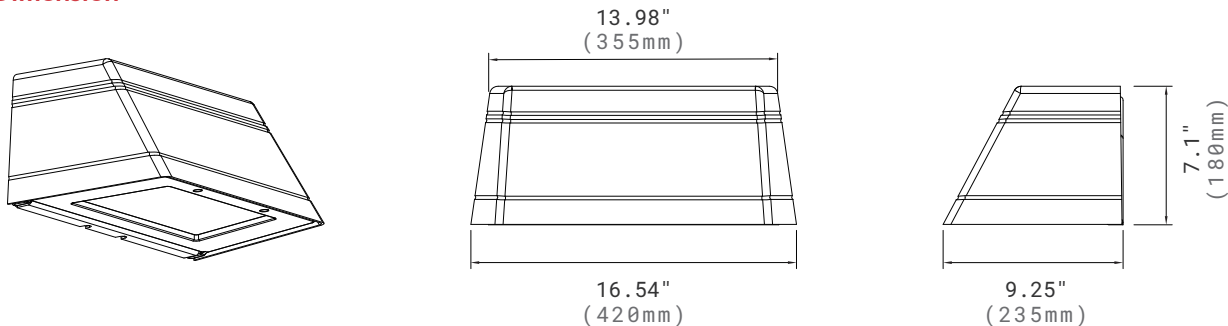

ORDERING INFORMATION

EXAMPLE: GRA-SPSW1-FT


| GRA | | | | | | |
|--------|---|---|-----------------------|--|-------------------------------|------------------------|
| Series | Wattage | CCT | Voltage | Control | Distribution | Finish |
| GRA | SP¹ Selectable 25W 45W ¹ 65W | SW² Selectable 3000K 4000K ² 5000K | 1 120V-277V | BLANK On/Off PC Photocontrol MS³ PIR Sensor ³ EBU⁴ Emergency Battery Back-up ⁴ | FT Forward Throw | BLANK Bronze |

NOTE:

- 45W is default setting.
- 4000K is default setting.
- Mounting height is 40ft (12m) max. Please check the last page for more sensor setting information.
- Ambient working temperature for emergency battery backup is 32°F to 104°F (0 °C to 40°C).
- Bronze finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Result may vary per actual order.

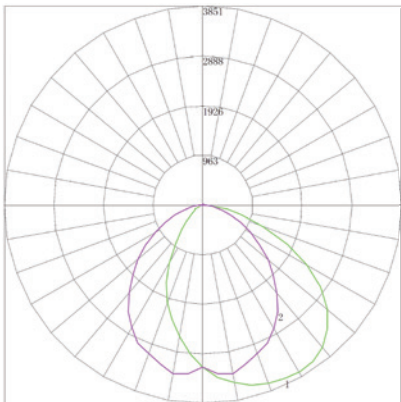

Maximum Candela =3851.036
Located At Horizontal Angle = 15, Vertical Angle = 30
#1-Vertical Plane Through HorizontalAngles(0-180)
#2-Vertical Plane Through Horizontal Angles(90-270)

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Lumen Output

| Nominal Wattage | Lumen Output | AC Input 120V | CCT | Distribution | CRI | LPW |
|-----------------|--------------|---------------|-------|---------------|-----|-----|
| 25W | 3250lm | 0.21A | 4000K | Forward Throw | >70 | 130 |
| 35W | 5850lm | 0.37A | 4000K | Forward Throw | >70 | 130 |
| 65W | 8500lm | 0.54A | 4000K | Forward Throw | >70 | 130 |

WARRANTY

5 year limited warranty.
Specifications subject to change without notice.