

# PILLAR ROUND POLE LIGHT



## PRODUCT DESCRIPTION

The Pillar round led pole light is well constructed with high quality extruded aluminum, UV powder coated, featuring tempered safety glass, moulded silicone gasket and stainless steel screws. This impressive pole light is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.

## ELECTRICAL SYSTEM

- Input Voltage: 120-277VAC, 50/60Hz
- Operating temperature range: -40-104°F (-40-40°C)
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20% at full load

## PERFORMANCE

CRI

80

CCT

2700K, 3000K, 4000K

Dimming

0-10V dimming

Projected Lifetime

L70 - 100,000 Hours


Working Temperature

-40-104°F (-40-40°C)


Certifications

- cETL Listed
- IP65 rated
- RoHS compliant

## SPECIFICATION



Pole Base

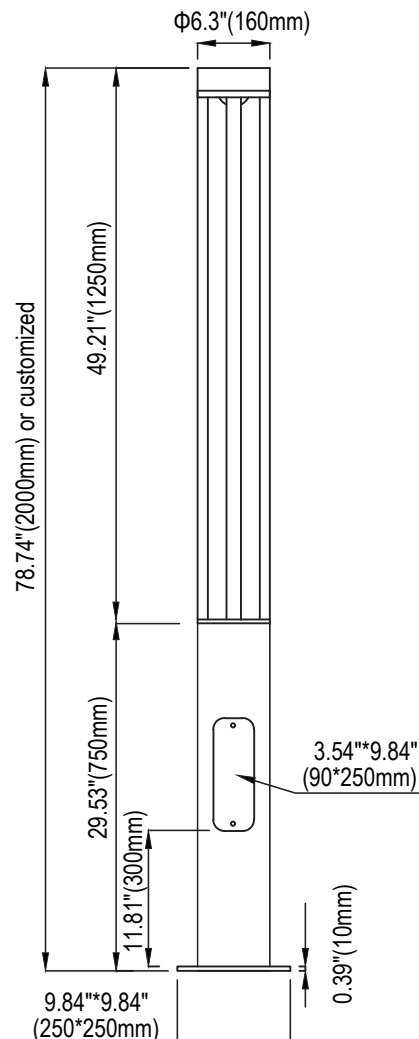

## Ordering Information

**Example:** PRPL-4FT-4530801-BK

| Name | Pillar Height¹ | Watts    | CCT       | CRI       | Voltage    | - Control    | - Finish   |
|------|----------------|----------|-----------|-----------|------------|--------------|------------|
| PRPL | 4FT - 4.1 feet | 25 - 25W | 27- 2700K | 80- CRI80 | 1-120-277V | Blank - None | BK - Black |
|      |                | 45 - 45W | 30- 3000K |           |            |              |            |
|      |                |          | 40- 4000K |           |            |              |            |

Notice:

- Pillar and pole height can be customized. Pole need to be ordered separately. Please check with Customer Service for details.
- \* Standard Finish is Black. Custom colors might be available at an additional charge.

## ACCESSORIES (ORDER SEPARATELY)



### ABMK-PRPL-6T13FT

Anchor bolts mounting kits  
for 6ft to 13ft pillar round pole light

### ABMK-PRPL-15T18FT

Anchor bolts mounting kits  
for 15ft to 18ft pillar round pole light



### PRPL-2.5FT-POLE-BK

2.46 feet pole, black

\* Pole height and finish color can be customized.

## PERFORMANCE DATA

### LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

| Nominal Watts | Lumen Output | CCT   | CRI |
|---------------|--------------|-------|-----|
| 25W           | 1800lm       | 4000K | 80  |
| 45W           | 3800lm       | 4000K | 80  |

## BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

| Model        | BUG Rating |
|--------------|------------|
| PRPL-2540801 | B1-U1-G0   |
| PRPL-4540801 | B2-U3-G1   |

## Warranty

Five year limited warranty.

Specifications subject to change without notice.