

THE VERSATILE LED LUMINAIRE (Bell & Petunia Shade)



PRODUCT DESCRIPTION

The VERSATILE series has the high-performance solution for the most demanding applications with an universal body and different shades. It can be used in many applications such as pedestrian street, factory, schools, garden, courtyard, hotel, parking lot, public parks etc.



FEATURE

- Bell and petunia shades available.
- Photocontrol and microwave motion sensor optional.
- Tempered glass lens doesn't fade and discolor.
- IES distribution Types I, II III, IV & VN

ELECTRICAL SYSTEM

- Input Voltage: 120-277VAC, 50/60Hz
- 0-10V dimming
- Operating temperature range: -40-104 °F (-40-40 °C)
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load
- Philips Input SPD(10KV)

SPECIFICATION

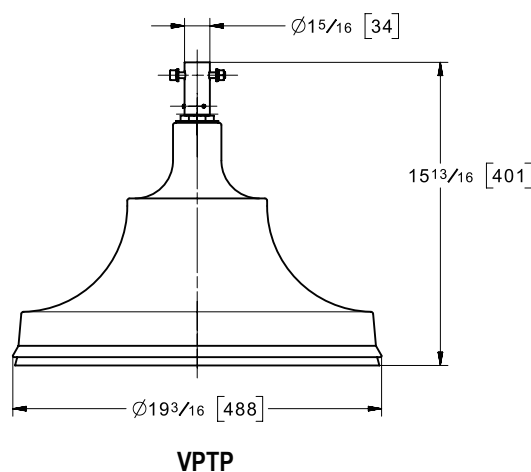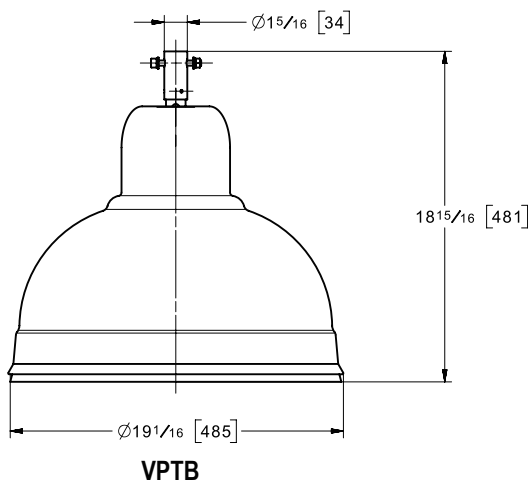

PERFORMANCE

CRI

70+

CCT

4000K, 5000K

Projected Lifetime


L70 - 140,000 Hours

Working Temperature


-40-104°F (-40-40°C)

Certifications

- cUL Listed
- IP66 rated
- RoHS compliant

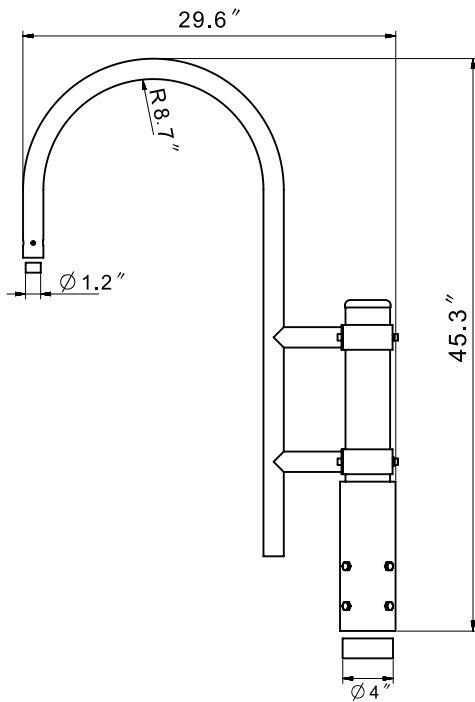

SGA4

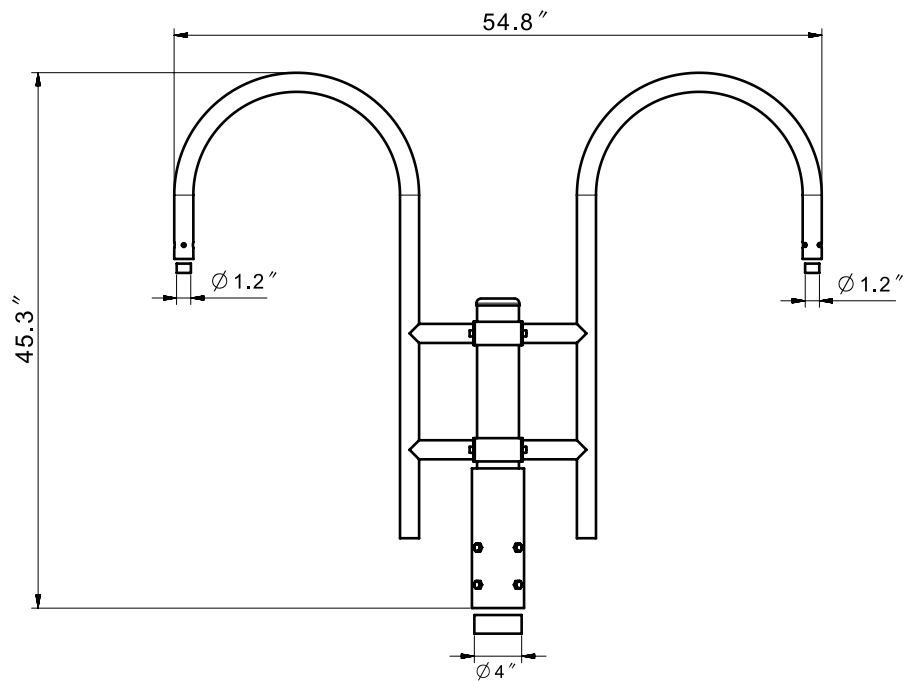

TGA4

Ordering Information

Example: VPTB30401-P-T5

Name	Shade	Watts	CCT	Voltage	- Control	- Installation	- Distribution	- Lens	- Finish
VPT	B- Bell	30- 30W	30- 3000K	1-120-277V	- Blank- None	- Blank - Pendant Mount	- T1 - Type I	- Blank - Glass Clear Lens	- Standard
	P- Petunia	60- 60W	40- 4000K	6- 347/480V	PC- Photoelectric Control	Order and shipped separately SGA4 - Single Gooseneck Arm for 4" OD pole ¹ TGA4 - Twin Gooseneck Arm for 4" OD pole ¹	T2 - Type II	Order and shipped separately PDL-Polycarbonate Drop Lens	Blank - Dark Bronze
		90- 90W	50- 5000K		MSW - Microwave Motion Sensor		T3 - Type III		Optional*
		150- 150W					T4 - Type IV		AL - Aluminum Silver
							T5 - Type VN		BK - Black WH - White (See Notes)

Notice:

1. Photocell can only be mounted with SGA4 or TGA4.
2. Please check the accessory table for details.

* Standard Finish is Dark Bronze. Custom colors might be available for an additional fee. Please check with Customer Service for more information.

Accessories



90304

VPTB-PDL

Polycarbonate Drop Lens



90302

SGA4

Single Gooseneck Arm
for 4" OD Pole




90303

TGA4


Twin Gooseneck
Arm for 4" OD Pole

PHOTOMETRY


All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.




Type I

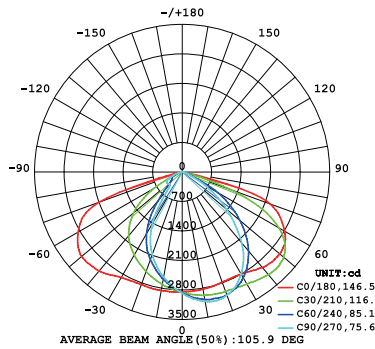

Type II

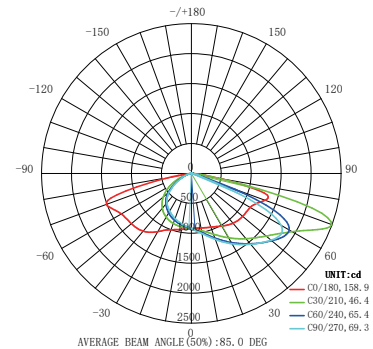

Type III

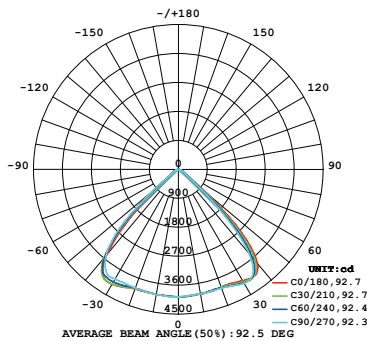

Type VN

Effective Projected Area (EPA)

Corresponding Products	Picture	EPA(ft2)
VPTP+SGA4+PDL		1.65
VPTB+SGA4		1.52
VPTP+SGA4		0.81
VPTB+TGA4		3.04
VPTP+TGA4		1.62

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Watts	System Watts	Lumen Output	CCT	Dist. Type	CRI	LPW
30W	29W	4060lm	4000K	Type VN	>70	140
60W	59W	8200lm	4000K	Type VN	>70	139
90W	88W	12000lm	4000K	Type VN	>70	137
150W	143W	18700lm	4000K	Type VN	>70	131



With Drop Lens



With Drop Lens



Single Gooseneck Arm Mount



Twin Gooseneck Arm Mount

Ref#: 20250716

Warranty

Five year limited warranty. Full warranty terms located at www.abovealllighting.com/warrantystatements

Note:

Specifications subject to change without notice.