




DIMENSION

Net Weight: 8.8kg / 19.40lbs

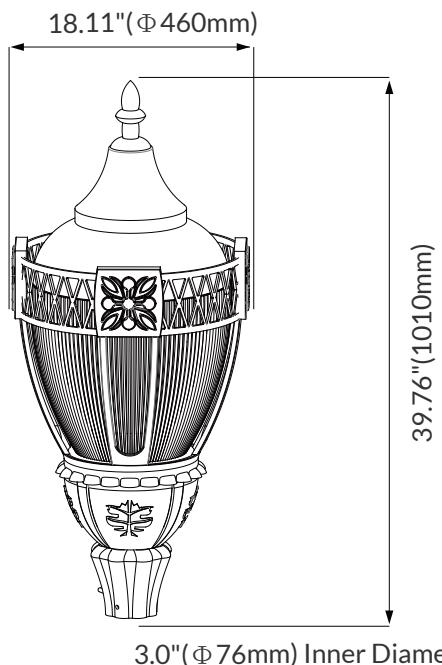

Traditional caged acorn design, with cast aluminum decorative finial and cap. This classic post top features a polycarbonate lens with fine striations creating a subtly diffused luminous effect. Ideally suited to outdoor landscape, courtyard as well as roadway or pathway applications.

TECHNICAL DATA

Wattage	25W/40W/60W/80W
CCT	3000K/ 4000K/ 5000K
CRI	70(standard), 80(optional)
Dimming	0-10V dimming
Input Voltage	AC100-277V
Projected Lifetime	>50,000Hrs (Ta=30°C@L80)
Operating Temp.	-40-104°F (-40-40°C)
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	IP65
Surge protection	L-N: 4KV;L/N-PG: 6KV
IK Rating	IK08
Certifications	ETL Listed

Features

- Distinctively styled cast aluminium cage, strong extruded lamp body.
- Wattage and CCT selectable
- Lumen packages ranging from 3,000 to 9,600 lumens



ORDERING INFORMATION

EXAMPLE: ACPT-80SP-SW1-V-BK

ACPT							
Series	Wattage	CCT	Voltage	Control	Installation	Distribution	Finish
ACPT	80SP Selectable ¹ 25W 40W 60W 80W	SW Selectable ² 3000K 4000K 5000K	1 120-277V	Blank 0-10V dimming BTPC Button Photocontrol	Blank 2 3/8" to 3" Tenon Pole	V Type V	BK Black ³

NOTES:


1. The highest wattage is default setting.
2. 5000K is default setting.
3. Black is standard. Custom color is available at an additional charge.

PERFORMANCE DATA

WATTAGE	CCT	DISTRIBUTION	LUMENS (lm)	CRI	LPW
25W	4000K	Type V	3,000	70	120
40W	4000K	Type V	4,800	70	120
60W	4000K	Type V	7,200	70	120
80W	4000K	Type V	9,600	70	120

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

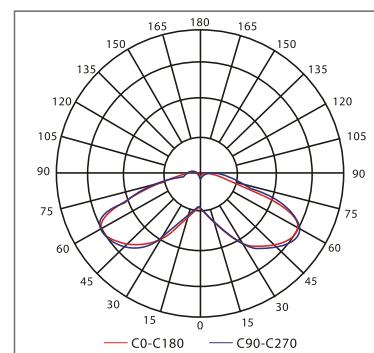

WARRANTY

Five year limited warranty.

Specifications subject to change without notice.