


CURVE MAGNETIC TRACK LIGHT

Lin Series



NOTE:
Curve Magnetic Track Profile sold separately.

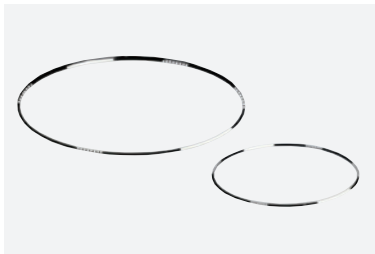

The Curve Lin Series is a lighting solution designed to work with our Curve Magnetic Track System. It features a low glare diffused lens and is available in several different wattage/length combinations all housed in an elegant body.

TECHNICAL DATA

Wattage	7W
Input Voltage	24VDC
CCT	2700K, 3000K, 3500K, 4000K
CRI	90
Lens	Diffused
Driver	Triac, 0/1-10V
Certifications	cETL Listed
	RoHS compliant
Installation	Magnetic
Environment	Indoor

ORDERING INFORMATION

EXAMPLE: CLIN07-3090-24V-DL-MTM-BK


CLIN						
Series	Wattage/Length	CCT&CRI	Voltage	Lens	Installation	Finish
CLIN	07 7W/6.38"	2790 2700K/90Ra 3090 3000K/90Ra 3590 3500K/90Ra 4090 4000K/90Ra	24V ¹ 24VDC ¹	DL Diffused Lens	MTM Magnetic Track Mount	BK ² Black ² WH ² White ²

NOTE:

1. The fixture is used for 24V magnetic track system.
2. Black and white finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.


DIMENSION

7W

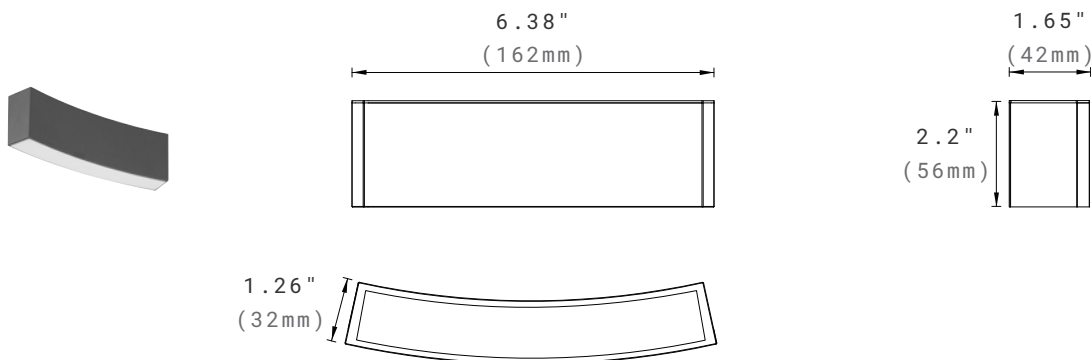

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

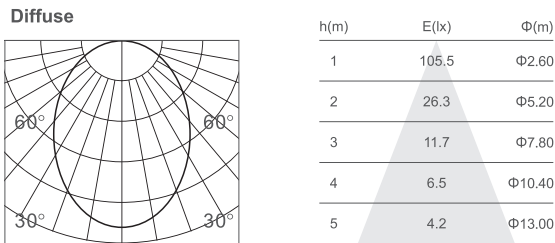

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	CRI	Lens	CCT	LPW
7W	490lm	90	Diffused	3000K	70

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.