







Thanks to the Curvy series, the Magnetic Track System is more than just straight, become curvaceous. Full circle isn't the purpose, compare to realizing the lines in different and gorgeous shapes. Provided with different types and colors, Curvy series works perfectly with straight profile to build up various scenes.

## **TECHNICAL DATA**

Material	Aluminum		
Input Voltage	24VDC		
Input Current	8A Max		
Color	RAL9004 Black/RAL 9003 White		
Certifications	cETL Listed		
	RoHS compliant		
Installation	Surface, Pendant, Recessed		



### ORDERING INFORMATION

EXAMPLE: CMTS-11-24V-BK


CMTS				
Series	Length	Voltage	Installation	Frame Finish
CMTS <sup>1</sup>	11	<b>24</b> <sup>2</sup>	Need to Order and	BK <sup>4</sup>
Curve Magnetic	In circle	24VDC <sup>2</sup>	Ship Separtely <sup>3</sup>	Black <sup>4</sup>
Track Profile <sup>1</sup>	12 In 1/2 circle 14 In 1/4 circle 18 In 1/8 circle		PMK Pendant Mount Kits SMK Surface Mount Kits RMK Recessed Mount Kits	Optional WH <sup>4</sup> White <sup>4</sup>

#### NOTE:

- 1. The standard curve track profile and all the curve track light fixtures are for R16.1" (410mm). For special track diameter and size demand, please contact Customer Service.
- 2. 24V constant voltage LED drivers can be choosed in the following driver list. The 24V constant voltage LED drivers also can be supplied by customer.
- 3. Different mounting kits need to be bought separately. Please check the details in the following accessory list.
- 4. Black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.
- 5. Single circuit is standard. Double circuit is optional.

# **ACCESSORIES (ORDER AND SHIP SEPARATELY)**

#### **Recessed Kit**

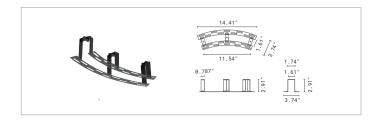

#### CMTS-RM-BK

Recessed Mounting Kits for Curver Magnetic Track. Including One Piece.

Sandy Black Sandy White

### NOTE:

The standard sell quantity is one piece per set.

If for full circle track, 3 pieces recessed mounting kits are suggested.

If for 1/2 curve track, 2 pieces recessed mounting kits are suggested.

If for 1/4 and 1/8 curve track, 1 piece recessed mounting kits is suggested.



#### Pendant Kit-A



#### MTS-PM-A-BK

Suspension 47.24inch with Electrical Wire (1pc).

Sandy Black

Sandy White \_\_\_\_

#### **Pendant Kit-B**



#### MTS-PM-B-BK

Suspension 47.24inch (1pc).

Sandy Black Sandy White



#### **Surface Mount Kits**




#### MTS-SM-BK

Surface Mounted for Magnetic

Track, Includes 4pcs.

Sandy Black Sandy White

#### **Driver Box**



#### MTS-DBOX-BK

Empty Box.

Sandy Black

Sandy White

# CONSTANT VOLTAGE LED DRIVER LIST (ORDER AND SHIP SEPARATELY)

#### Non-Dimmable LED Driver



#### XLG-75-24-A

75W. Non-Dimmable. Size: 7.09"x2.48"x1.40". Input Voltage: AC100-305V. Output Voltage: 24V DC.



#### XLG-100-24-A

100W. Non-Dimmable. Size: 7.09"x2.48"x1.40". Input Voltage: AC100-305V. Output Voltage: 24V DC.



#### XLG-150-24-A

150W, Non-Dimmable. Size: 7.09"x2.48"x1.40". Input Voltage: AC100-305V. Output Voltage: 24V DC.



#### XLG-200-24-A

200W, Non-Dimmable. Size: 7.09"x2.48"x1.40". Input Voltage: AC100-305V. Output Voltage: 24V DC.

#### 5 IN 1 Dimmable LED Driver



#### KVG-24080-DWJ

80W. Triac/0-10V/1-10V/10V PWM.

Input Voltage: 120-277V. Output Voltage: 24V DC.



### KVG-24100-DWJ

100W. Triac/0-10V/1-10V/10V PWM.

Input Voltage: 120-277V. Output Voltage: 24V DC.



#### KVG-24150-DWJ

150W. Triac/0-10V/1-10V/10V PWM.

Input Voltage: 120-277V. Output Voltage: 24V DC.



KVG-24200-DWJ

200W.

Triac/0-10V/1-10V/10V PWM.

Input Voltage: 120-277V. Output Voltage: 24V DC.





KVG-24300-DWJ

300W,

Triac/0-10V/1-10V/10V PWM.

Input Voltage: 120-277V. Output Voltage: 24V DC.

### **DALI Intelligent LED Driver**



#### LM-100-24-G1D2

100W, DALI-2, Push DIM.


Size: 13.86"x1.69"x1.18".(L×W×H).


Input Voltage: AC120-277V. Output Voltage: 24V DC.

## **DIMENSION**

#### **Curve in Circle**











#### Curve in 1/2








Curve 1/4








Curve 1/8







## **INSTALLATION**








Pendant

Recessed

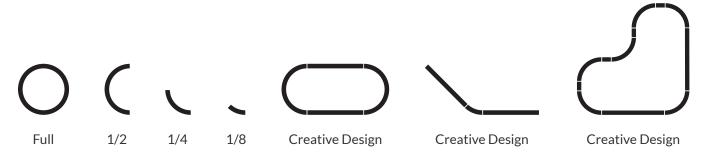

## **WARRANTY**

5 year limited warranty.

Specifications subject to change without notice.