

GALENE LED WALL LIGHT

Indirect and Direct Light



The Galene Wall Light is designed in a round or square shape with durable powder coat paint. It combines aluminum structure with a tempered glass diffuser radiating light upward and downward against the wall where installed.

TECHNICAL DATA

Wattage	Selectable 20W/40W
Beam Angles	25°, 45°, 60°
CRI	70 standard
	80 optional
CCT	Selectable 3000K, 4000K, 5000K
Input Voltage	120-347VAC, 50/60Hz
Operating Temp.	-40°F to 104°F(-40°C to 40°C)
Driver	Non dimming
Certifications	cUL Listed
	Suitable for wet locations
	RoHS compliant
Power Factor	>0.9 at full load
Projected Lifetime	L70 - 100,000 Hours

FEATURES


- **Shape Options:** Round and square shapes available.
- **Light Distribution:** Direct and indirect light.

GALENE LED WALL LIGHT


Indirect and Direct Light

SPECIFICATION

Round Shape
 Net Weight: 6.13lbs

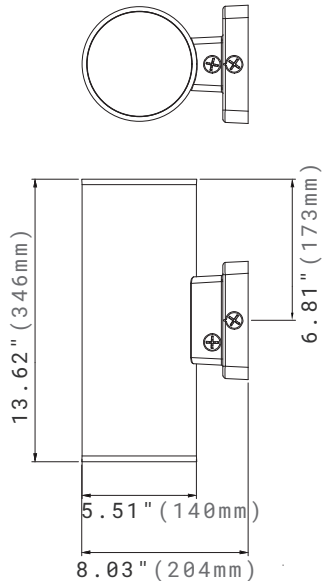

Square Shape
 Net Weight: 7.1lbs

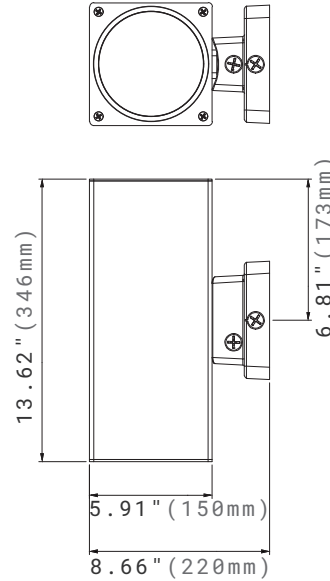

ORDERING INFORMATION

EXAMPLE: GID-RSP-SW8-60-BK




GID							
Series	Shape	Wattage	CCT	Voltage	Control	Beaming Angle	Finish
GID Indirect and Direct	R Round S Square	SP Selectable Power 20W 40W ¹	SW Selectable White 3000K 4000K ² 5000K	8 120-347V	BLANK None	25 25° 45 45° 60 60°	BK Black ⁴

NOTE:

- 40W is the default setting. If other wattage is needed, please contact Customer Service in advance to change the setting in factory or change the setting in the field.
- 4000K is the default setting. If other CCT is needed, please contact Customer Service in advance to change the setting in factory or change the setting in the field.
- Minimum order required, please contact customer service for additional information.
- Standard Finish is Black. Additional charge will apply for custom finish.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

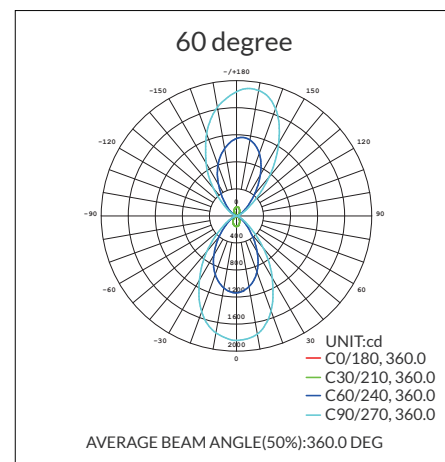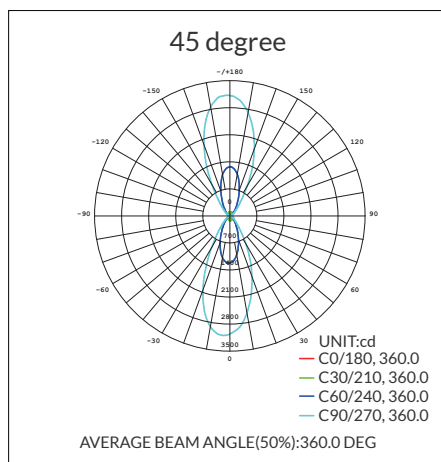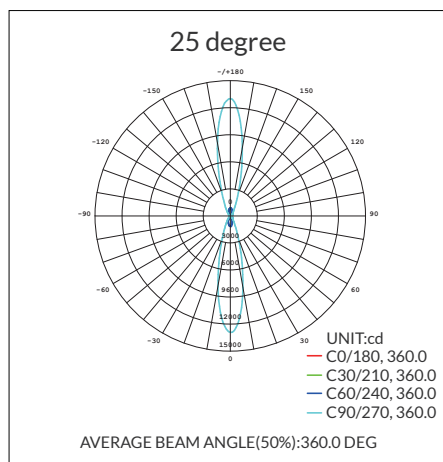

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Tested Wattage	Lumen Output	AC Input 120V	CCT	Beam Angle	CRI	LPW
20W	20W	2500lm	0.17A	4000K	45°	70	130
40W	37W	4800lm	0.33A	4000K	45°	70	130

NOTE:

- 0.92 multiplier is for 3000K and 5000K.

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.