

JENN FRAME LED LIGHT



PRODUCT DESCRIPTION

The JENN Frame led light is designed with lightweight aluminum frame. Available in 2x2 and 2x4. Recessed form factor fits most T-grid systems. It is architectural recessed lighting solution that compatible for commercial and institutional environments, including office building, medical, health, educational, retail, hotel, airport, hospitality, etc.

FEATURE

- Slim frame design
- CCT selectable
- Available in 2x2 and 2x4 sizes
- Milky Lens is standard

ELECTRICAL SYSTEM

- Input Voltage: 120-277V, 50/60Hz
- Minimum Ambient -20°C, Maximum Ambient is 40°C
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

SPECIFICATION

PERFORMANCE

CRI

80

CCT

3000K, 3500K, 4000K, 5000K, 6500K

Dimming

0-10V Dimming

Projected Lifetime

L70 - 100,000 Hours


Working Temperature

-4-104°F (-20-40°C)


Certifications

- cULus listed
- Suitable for dry locations
- RoHs compliant

2x2

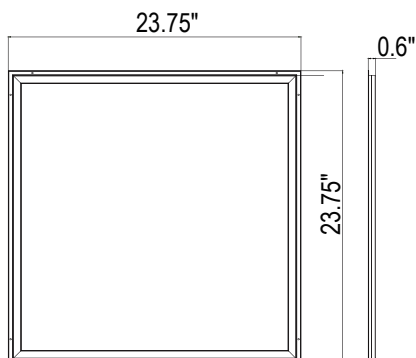

2x4

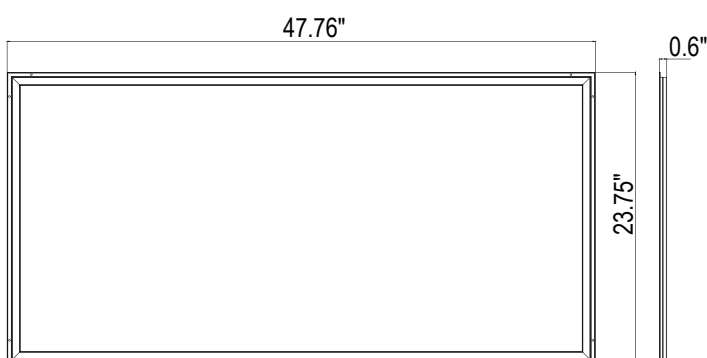

Ordering Information

Example: FRM22-40SP-SW1-JEN

Series	Length	Watts	CCT	Voltage	Series	Finish
FRM	22-2x2 FT	40SP - 20W/30W/40W Selectable ¹	SW - 3000K/3500K/4000K 5000K/6500K selectable ²	1- 120-277V	JEN	Blank - White
	24 - 2x4 FT	54SP - 40W/50W/60W Selectable ¹				

Notice:

- 40W is default setting for 2x2. 60W is default setting for 2x4. Other wattages can be set by DIP switch.
- 4000K is default setting. Other CCT can be set by DIP switch.

* White finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

Accessories (Ordered separately)




AAL-EBU-DC08D-XXX

8W emergency battery back-up, 120-347V input, 30-60Vdc output

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Size	Lumen Output	AC Input 120V	CCT	CRI	LPW
20	2x2	2500	0.17A	4000K	80	125
30	2x2	3750	0.25A	4000K	80	119
40	2x2	5000	0.33A	4000K	80	125
40	2x4	5000	0.33A	4000K	80	125
50	2x4	6250	0.42A	4000K	80	125
60	2x4	7500	0.50A	4000K	80	125

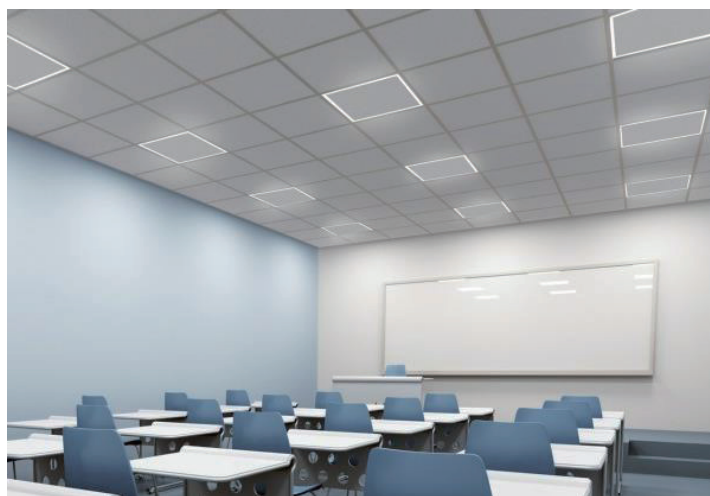

Warranty

Five year limited warranty.

Notes: Specifications subject to change without notice.