



**DARKSKY
APPROVED**
Reduces Light pollution
Certified by DarkSky.org

The Pillar Round LED Pole Light is well constructed with high quality extruded aluminum, UV powder coated, featuring tempered safety glass, moulded silicone gasket and stainless steel screws. This impressive pole light is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.

TECHNICAL DATA

Wattage	25W, 45W
CRI	80-Standard
CCT	2700K, 3000K, 4000K
Dimming	0-10V Dimming is standard
Input Voltage	120-277VAC, 50/60Hz
Operating Temp.	-40°F to 104°F(-40°C to 40°C)
Certifications	cETL Listed
	RoHS compliant
	DarkSky approved for CCT of
	3000K and below
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65


FEATURES

- **Durable Construction:** The robust protection system ensures exceptional corrosion and weather resistance, delivering long-term reliability in demanding environments.
- **Adjustability & Adaptability:** Customizable pole height and finish color.


SPECIFICATION

Dimension

Pillar Round Pole Light

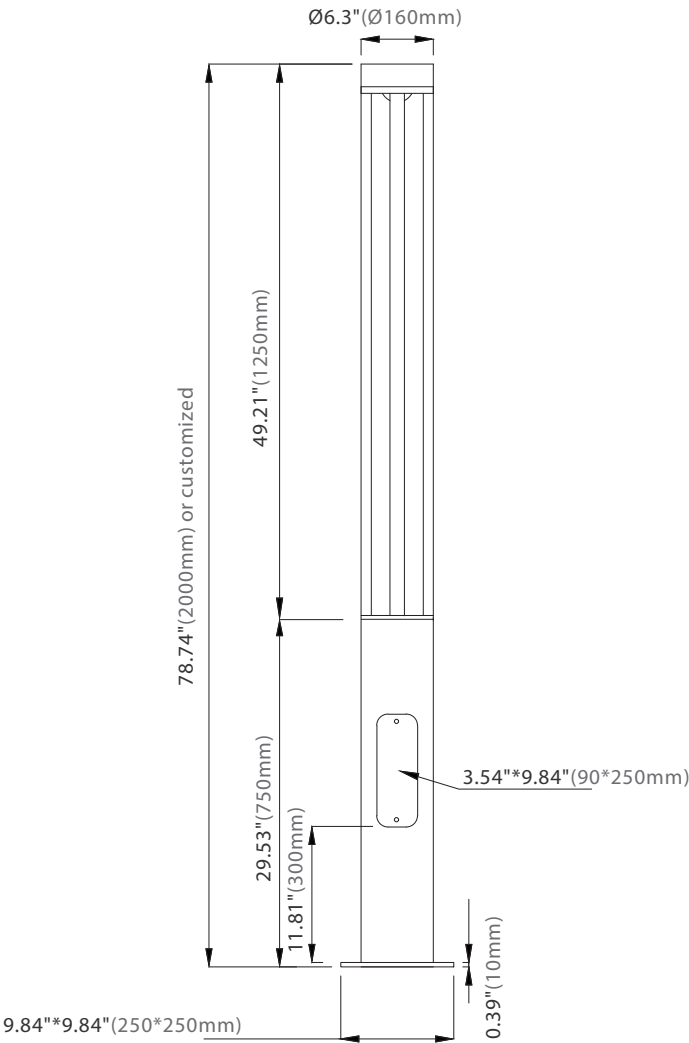

Pole Base

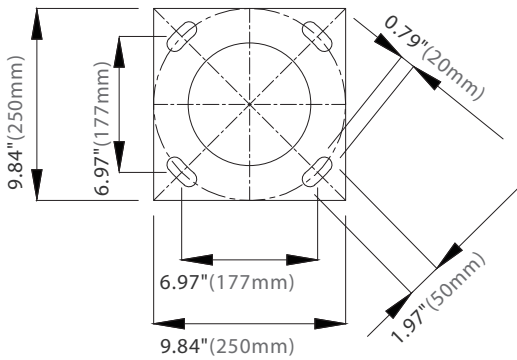

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output	CCT	CRI
25W	1800lm	4000K	80
45W	3800lm	4000K	80

ORDERING INFORMATION

Standard Model

EXAMPLE: PRPL-4FT-4530801-BK

PRPL							
Series	Pillar Height	Wattage	CCT	CRI	Voltage	Control	Finish
PRPL	4FT 4.1 feet ¹	25 25w 45 45w	27 2700K 30 3000K 40 4000K	80 CRI80	1 120-277V	BLANK 0-10V Dimming	BK Black ²

NOTE:

1. Pillar and pole height can be customized. Pole need to be ordered separately. Please check with Customer Service for details.
2. Standard Finish is Black. Custom colors might be available at an additional charge.

ORDERING INFORMATION

DarkSky-Approved Model


EXAMPLE: PRPL-4FT-4530801-BK

PRPL							
Series	Pillar Height	Wattage	CCT	CRI	Voltage	Control	Finish
PRPL	4FT 4.1 feet ¹	25 25w 45 45w	27 2700K 30 3000K	80 CRI80	1 120-277V	BLANK 0-10V Dimming	BK Black ²

NOTE:

1. Pillar and pole height can be customized. Pole need to be ordered separately. Please check with Customer Service for details.
2. Standard Finish is Black. Custom colors might be available at an additional charge.

ACCESSORIES (ORDER SEPARATELY)




ABMK-PRPL-6T13FT

Anchor bolts mounting kits.
for 6ft to 13ft Pillar Round Pole Light.

ABMK-PRPL-15T18FT

Anchor bolts mounting kits.
for 15ft to 18ft Pillar Round Pole Light.



PRPL-2.5FT-POLE-BK

2.46 feet pole, black.

* Pole height and finish color can
be customized.

BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
PRPL-2540801	B1-U0-G0
PRPL-4540801	B2-U0-G1

WARRANTY

5 years limited warranty.
Specifications subject to change without notice.

Ref#: 20250901