

SELECTABLE TRUMPET

LED Wall Light



The Selectable Trumpet LED Wall Light is ideal for lighting up signs and facades. Die casting aluminum gasketed enclosure, lasting appearance and excellent heat dissipation. Swivel Knuckle can make adjustable angle. Wattage and CCT selectable.

TECHNICAL DATA

Wattage	Selectable 30W/40W/50W
CRI	80
CCT	Selectable 3000K/4000K/5000K
Input Voltage	120-277VAC, 50/60Hz
Operating Temp.	
50W	-40°F to 86°F(-40°C to 30°C)
40W	-40°F to 95°F(-40°C to 35°C)
30W	-40°F to 104°F(-40°C to 40°C)
Driver	0-10V dimming
Certifications	cETL Listed
	RoHS compliant
	Suitable for wet locations
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65



Wingnut Tool-less Design



Adjustable Swivel Knuckle

FEATURES


- **Versatile Application:** Ideal for effectively lighting up signs and building facades with precision and clarity.
- **Customizable Settings:** Wattage and CCT selectable to tailor energy consumption and color temperature for specific needs.
- **Adjustable Mounting:** Equipped with a swivel knuckle that allows for flexible and precise angle adjustment.
- **Photocell Sensor Option:** Photocell sensor available to enable automatic dusk-to-dawn operation for improved energy efficiency.

SELECTABLE TRUMPET

LED Wall Light

SPECIFICATION

Net Weight: 3.64lbs(1.65kgs)

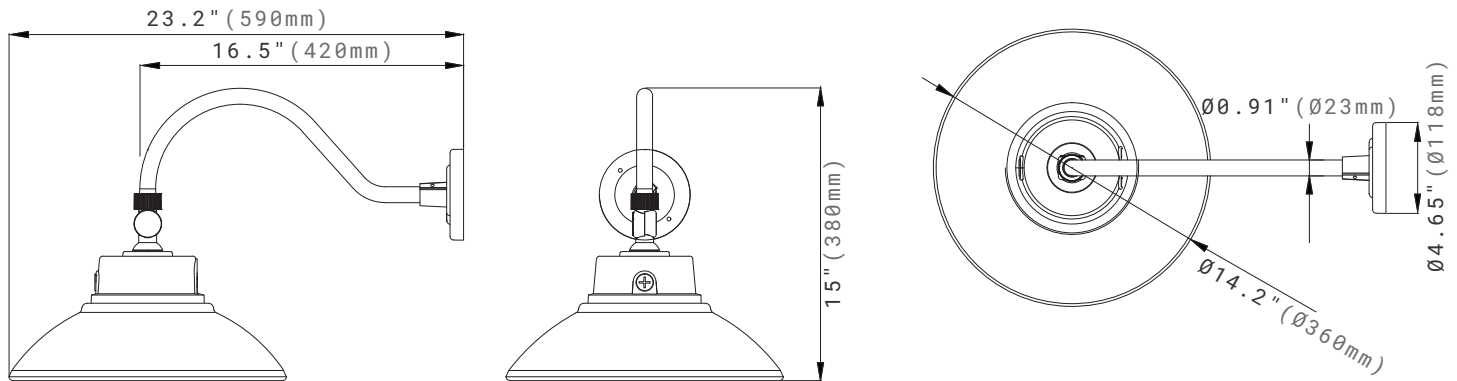

ORDERING INFORMATION

EXAMPLE: STPT-SP-SW1-PC-T5-BK


STPT							
Series	Wattage	CCT	Voltage	Control	Installation	Optics	Finish
STPT	SP Selectable Power 30W ¹ 40W 50W	SW Selectable White 3000K ² 4000K 5000K	1 120-277V	PC Button Photo Control ³	BLANK Gooseneck Arm	T5 Type V	Standard BK Black ⁴ Optional BZ Bronze WH White

NOTE:

- 30W is default setting. 40W or 50W can be set by DIP switch in the field.
- 3000K is default setting. 4000K and 5000K can be set by DIP switch in the field.
- The default setting of photocontrol is turned off. Please turn on the Photocontrol switch during installation if needed.
- Black finish is standard. Optional color might be available for an additional fee. Please check with Customer Service for more information.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

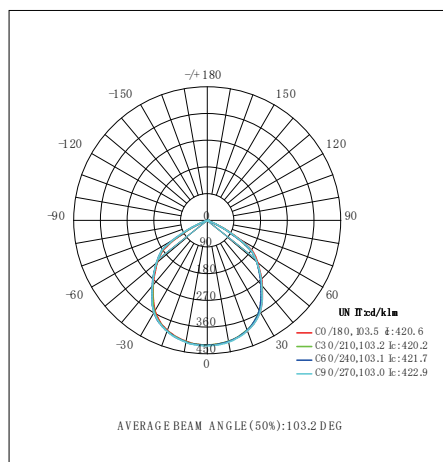

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output	CCT	Input Current @120V	LPW
30W	3600lm	3000K	0.25A	120
30W	3810lm	4000K	0.25A	127
30W	3660lm	5000K	0.25A	122
40W	4600lm	3000K	0.33A	115
40W	5000lm	4000K	0.33A	125
40W	4680lm	5000K	0.33A	117
50W	5500lm	3000K	0.42A	110
50W	6100lm	4000K	0.42A	122
50W	5750lm	5000K	0.42A	115

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.