

Compact and inconspicuous design with asymmetrical light distribution, directing light downward, minimizing uplight while revealing the texture of the stepped baffle. Die-cast aluminum housing, silicone rubber gasket, tempered glass, akzoNobel powder coating. Heavier powder coating optional for marine ambient corrosion resistance. Ideal for the illumination of ground surfaces, building entrances, stairs and footpaths.


TECHNICAL DATA

Wattage	8W
CRI	80
CCT	3000K, 4000K
Input Voltage	120-277VAC, 50/60Hz
Operating Temp.	-4°F to 104°F (-20°C to 40°C )
Driver	
Standard	Non dimming
Optional	0-10V dimming
Certifications	cETL Listed
	RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65

FEATURES


- **Housing Construction:** Heavy duty cast aluminum housing with tempered glass lens.
- **Mounting System:** Stainless steel pre-installed housing with marine grade treatment available.
- **Light Distribution:** Asymmetrical light distribution pattern.

SPECIFICATION

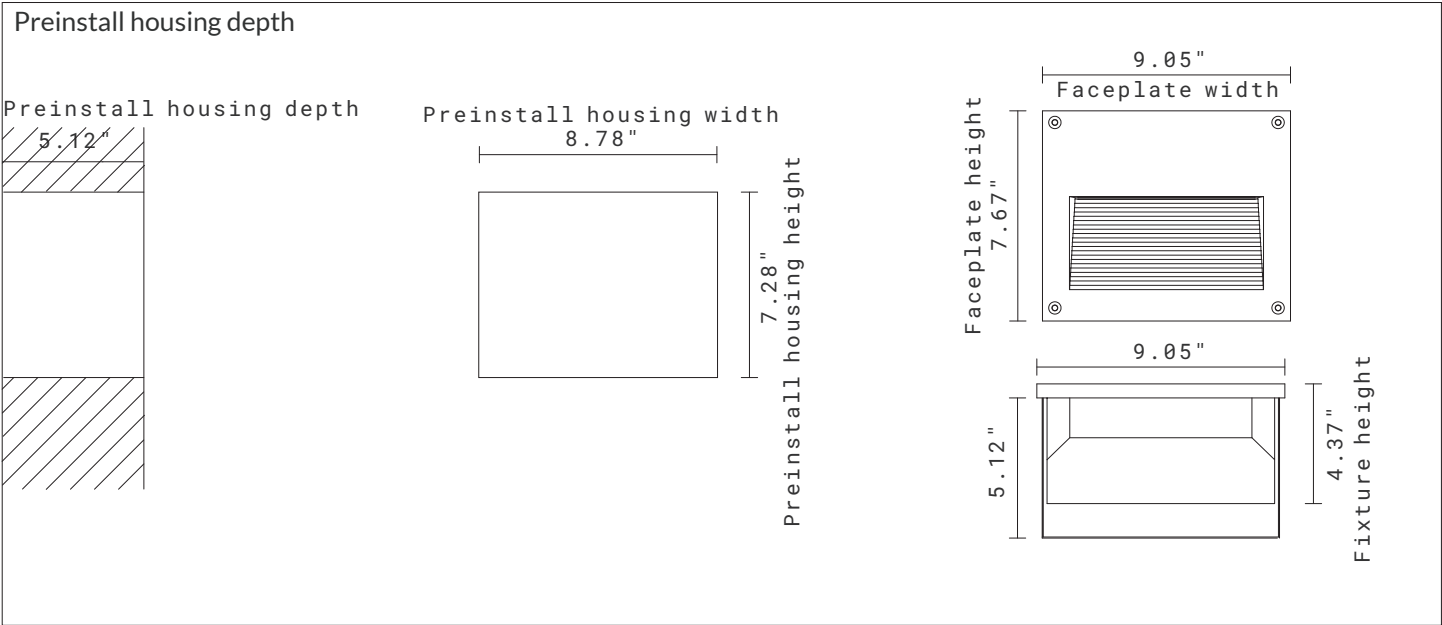

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

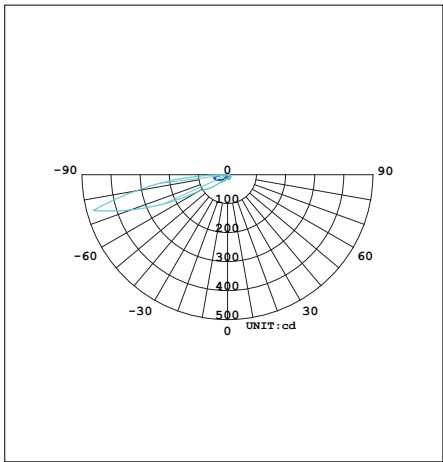

### ORDERING INFORMATION


EXAMPLE: SSWL08301-RM-BK

SSWL							
Series	Wattage/ Size	CCT	Voltage	Control	Installation	Faceplate Finish	Option
SSWL	08 8W	30 3000K  40 4000K	1 120-277V	BLANK On/Off	RM Recessed	Standard <b>BK</b> Black <sup>2</sup> RAL9011  Optional <b>WH</b> White RAL9016  <b>GY</b> Gray RAL7012  <b>BZ</b> Bronze  <b>SL</b> Silver RAL9006	Blank None  <b>M</b> Marine ambient corrosion resistance  <b>D</b> 0-10V Dimming <sup>1</sup>

#### NOTE:

1. Please choose the preinstall box in following Accessory Table.
2. Black finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

### ACCESSORIES (ORDERED SEPARATELY AND FIELD INSTALLED)



**91409**

**SSWL-9IN-PBOX**

Preinstall box for 9inch SSWL Step Light

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Measured Wattage	Delivered Lumen	CCT	CRI
8W	8W	167lm	3000K	80

WARRANTY

2 years limited warranty.  
Specifications subject to change without notice.

Ref#: 20250904