



The Thoe LED Wall Light is designed in an architecture minimalist cuboid shape. It combines die-cast aluminium structure and glass lens in one integral shape. Direct and indirect distributions. Suitable for both indoor and outdoor wall light applications.

TECHNICAL DATA

Wattage	36W
CRI	80
CCT	3000K
Input Voltage	120V, 50/60Hz
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Driver	Non dimming
Certifications	cETL Listed RoHS compliant
Power Factor	>0.97 at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65

FEATURES

- **Construction & Durability:** Die-cast aluminum housing with clear glass lens, ensuring robust protection and IP65 rating for reliable performance in wet locations.
- **Lighting Performance & Design:** Utilizes efficient AC LED technology without a driver, providing both direct and indirect lighting for versatile illumination.




Direct and Indirect Light

SPECIFICATION

Long

Net Weight: 4.47lbs (2.03kg)

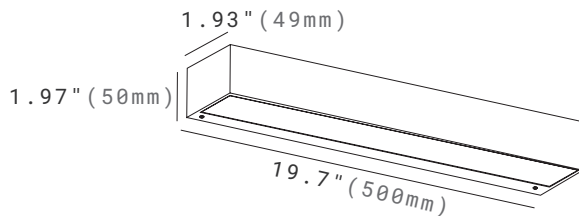

ORDERING INFORMATION

EXAMPLE: TSID18304-BK

Series	Distribution	Wattage	CCT	Voltage	Control	Finish
TL Thoe Long	ID Indirect and Direct	36 36W	30 3000K	4 120V	BLANK On/Off	BK Black ¹

NOTE:

1. Black finish is standard. Other finish color is available at an additional charge.


PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output	AC Input 120V	CCT	CRI
36W	2160	0.30A	3000K	80

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

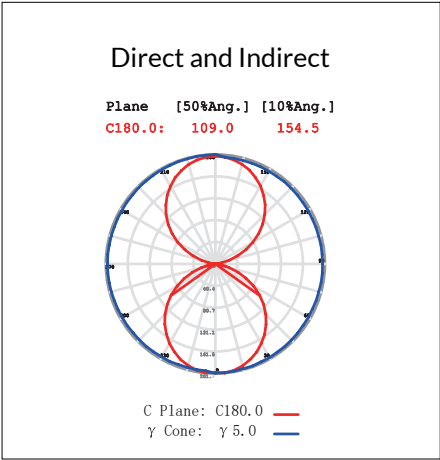

BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
TLID36304	B1-U5-G0

WARRANTY

3 years limited warranty.
Specifications subject to change without notice.

Ref#: 20250919