



The Vagary Pendant Lights exceptionally minimalist design incorporates our ultra-thin, semi-transparent vertical optics. Optional seamless row mounting for continuous light. It is perfect for applications that include conference rooms, open offices, retail settings, anywhere you desire an elegant statement piece.

TECHNICAL DATA

Wattage	40W
CCT	Selectable 3000K/3500K/4000K
Driver	1-10V Dimming
CRI	80Ra
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cULus conforms to UL Std. 1598Cert. to CSA Std. C22.2 No.250.0 RoHS compliant Suitable for dry locations
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load

Seamless Continuous Row Mount



Each Power Feed Connections Up to 40ft.

Visual Comfort



Diffused Flat Lens and Louver Lens.

CCT Selectable



3000K/3500K/4000K Selectable.

FEATURES


- Sleek and elegant minimalist design.
- Transparent optic and edge-lit.
- Integral driver, isolated circuit.
- Seamless continuous row mount.
- CCT selectable.

SPECIFICATION

Dimension

Net Weight: 11lbs (5kg)

Max Pendant Cable Length: 3.9ft (1300mm)

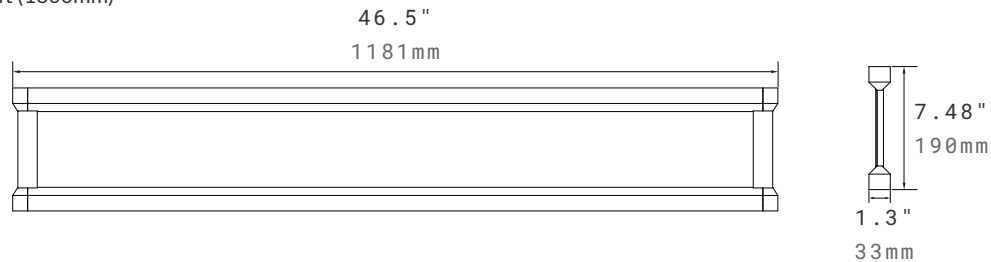

ORDERING INFORMATION

EXAMPLE: VAGA12-SW1-PM-D-FDL

VAGA								
Series	Size	Driver	CCT	Voltage	Mounting Options	Light Distribution	Lens Options	Finish
VAGA	12 4FT	BLANK Integral	SW Selectable 3000K 3500K 4000K	1 120-277V	PM ¹ Pendant ¹	D ² Direct ² ID Indirect	FDL ³ Flush Diffused Lens ³ LVL ⁴ Louver Lens ⁴	BLANK ⁵ White ⁵ BK Black

NOTE:

1. Aircraft Cable pendant mount kits include dry ceiling and drop ceiling and they need to be bought separately. Please refer to the following accessory table to choose the right pendant mounting kits.
2. Direct distribution is standard.
3. Flush Diffused Lens is standard.
4. Louver lens is only available for direct distribution.
5. White and black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

ACCESSORIES (ORDERED SEPARATELY AND FIELD INSTALLED)

Drop Ceiling Suspension Mount List



MAG-PMK3-5FT

MAG-PMK3-5FT-BK

Aircraft Cable Pendant Mount Kits for Drop Ceiling, with 5ft Aircraft Cable and 5ft Power Cord. (One Set Per Fixture). White/Black.

MAG-PMK3-12FT

MAG-PMK3-12FT-BK

Aircraft Cable Pendant Mount Kits for Drop Ceiling, with 12ft Aircraft Cable and 12ft Power Cord. (One Set Per Fixture). White/Black.

*Suitable for 9/16" and 15/16" Flat Ceiling. If for 9/16" slot ceiling please contact Customer Service.

Dry Ceiling Suspension Mount List



MAG-PMK1-5FT

MAG-PMK1-5FT-BK

Aircraft Cable Pendant Mount Kits for Dry Ceiling, with 5ft Aircraft Cable and 5ft Power Cord. (One Set Per Fixture). White/Black.

MAG-PMK1-12FT

MAG-PMK1-12FT-BK

Aircraft Cable Pendant Mount Kits for Dry Ceiling, with 12ft Aircraft Cable and 12ft Power Cord. (One Set Per Fixture). White/Black.


PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

	Flush Diffused Lens	Louver Lens
		
Lengths	4FT	4FT
Wattage	40W	40W
Voltage	120-277V (Int.Driver)	120-277V (Int.Driver)
Efficacy	105lm/W@3500K	90lm/W@3500K
Lumen Output	4200lm@3500K	3600lm@3500K


PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

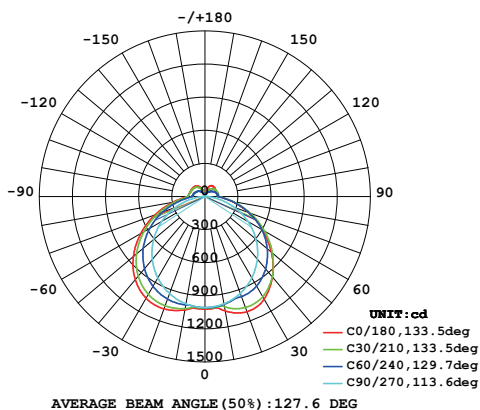

Direct

13% Uplight / 87% Downlight

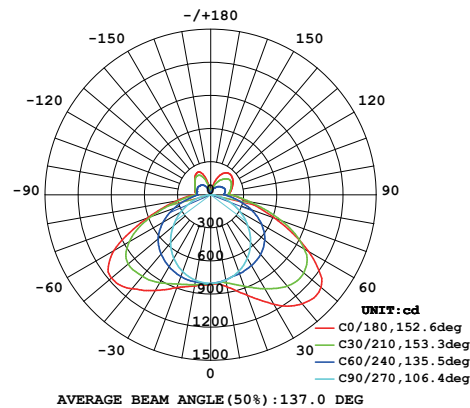

Indirect

17% Uplight / 83% Downlight

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.