

VRUD VICKY RING LIGHT

Upward & Downward



The Vicky Ring Light is a unique ring style light with an LED light source illuminating upward and downward. It is available in sizes ranging from 23.6" (dia.) up to 196.9" (dia.). Aluminum body constructions. A versatile architectural lighting solution, available as pendant mount. Optional acoustic system that maximizes surface area to absorb sound waves and improve harmony in the installed space, providing a perfect integration of lighting and acoustic control.

TECHNICAL DATA

Wattage	65W, 80W, 120W, 135W, 150W 200W, 300W, 400W, 480W
CCT	3000K, 3500K, 4000K, 5000K
Driver	0-10V Dimming standard
CRI	90
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 RoHS compliant Suitable for dry location
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load


FEATURES

- Fixtures in diameters from 23.6" through 196.9".
- Direct and indirect illuminating.
- Available in standard light and acoustic w/light.
- 30+ acoustic felt colors available.


SPECIFICATION

Dimension


Cable and wire cord length: 59" (1.5m)

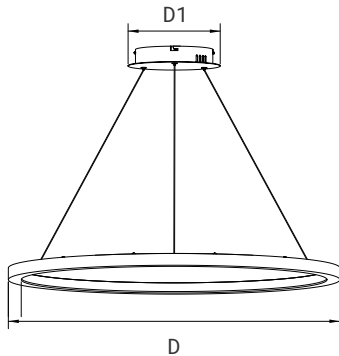

Central Canopy Suspended



Direct Suspended





Section

Central Canopy Suspended

Dimension		Driver Quantity	Section Quantity	Wattage
D	D1			
23.6"(600mm)	10.0"(250mm)	2	1	65W
35.4"(900mm)	10.0"(250mm)	2	1	80W
47.2"(1200mm)	13.8"(350mm)	3	1	120W
59.1"(1500mm)	13.8"(350mm)	3	1	135W
78.8"(2000mm)	17.7"(450mm)	4	3	150W
98.4"(2500mm)	17.7"(450mm)	5	4	200W
118.1"(3000mm)	18.0"(450mm)	7	5	300W
157.5"(4000mm)	23.6"(600mm)	8	6	400W
196.9"(5000mm)	23.6"(600mm)	14	6	480W

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

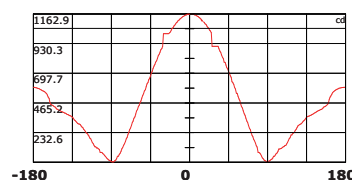

ORDERING INFORMATION

EXAMPLE: VRUD-6524-40901-ACPMK-WH-NSAC-021 130


VR 1. Series	 2. Light Emitting	 3. Acoustic Configuration	 4. Wattage/ Diameter	 5. CCT	 6. CRI	 7. Voltage
VR Vicky Ring	UD Upward and Downward Light	BLANK¹ Light without Acoustic ¹ LA¹ Light with Acoustic ¹ <i>Specify color from the following list.</i>	6524 65W/Ø23.6" 8035 80W/Ø35.4" 12047 120W/Ø47.2" 13559 135W/Ø59.1" 15079² 150W ² /Ø78.8" 20098² 200W ² /Ø98.4" 300118² 300W ² /Ø118.1" 400158² 400W ² /Ø157.5" 480197² 480W ² /Ø196.9"	30 3000K 35 3500K 40 4000K 50 5000K	90 90Ra	1 120V-277V
		8. Installation ACPMK³ Central Canopy Aircraft Cable Suspended ³ DPMK³ Direct Aircraft Cable Suspended ³	9. Control BLANK 0-10V Dimming	10. Frame Finish WH⁴ White ⁴	11. Acoustic Finish BLANK No Acoustic Acoustic Color Code⁵ <i>Specify from the following table⁵</i>	

VRUD VICKY RING LIGHT

Upward & Downward

NOTE:

1. If choose acoustic, please choose the acoustic color in the following list. Acoustic is not available for 135W, 150W, 200W, 300W, 400W and 480W.
2. 135W, 150W, 200W, 300W, 400W and 480W are shipped in sections and need to be installed in the field.
3. Central canopy suspended is standard for 65W/80W/120W/135W. Direct suspended is standard for 150W, 200W, 300W, 400W, 480W. Please contact Customer Service for special requirements.
4. White finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.
5. There will be slight differences between the color of the acoustic image and the actual fabric because of computer display defects. The standard acoustic colors include: NSAC-021 130, NSAC-042 146, NSAC-028 110, NSAC-002 122, NSAC-033 103. Other acoustic colors might be available for an additional fee. Please check with Customer Service for more information.

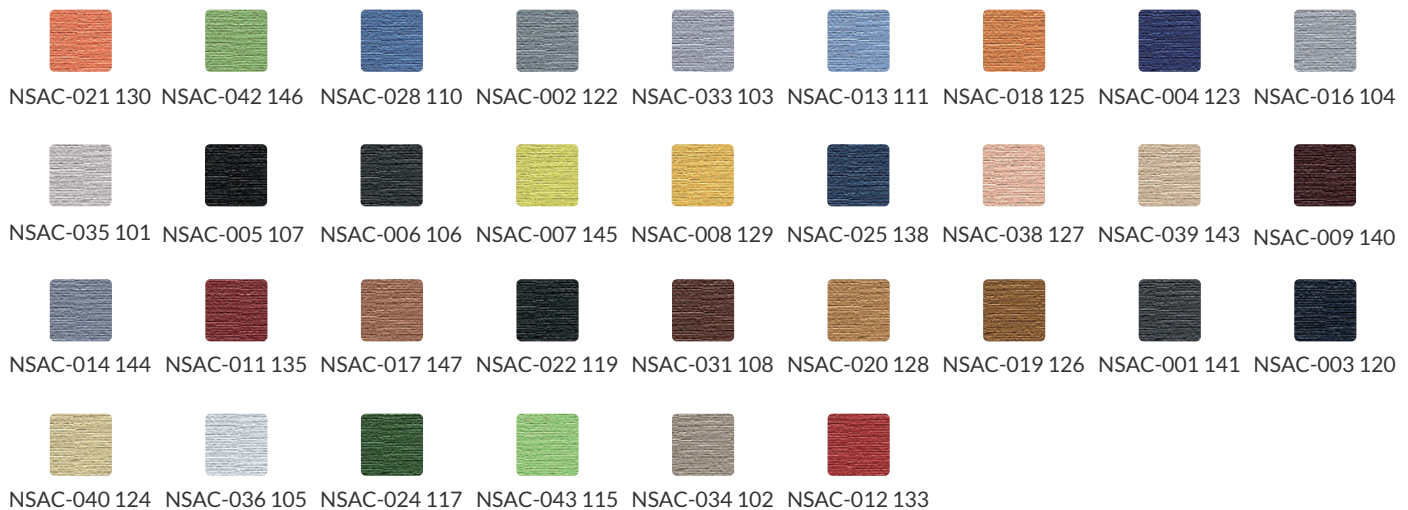Acoustic Colors⁵**PERFORMANCE DATA**

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Direct Lumen/ Wattage	Indirect Lumen/ Wattage	AC Input 120V	CCT	CRI	LPW
65W	3400lm/40W	2100lm/25W	0.54A	4000K	90	85
80W	4760lm/56W	2000lm/24W	0.67A	4000K	90	85
120W	7140lm/84W	3060lm/36W	1.00A	4000K	90	85
135W	7650lm/90W	3800lm/45W	1.13A	4000K	90	85
150W	8900lm/105W	3800lm/45W	1.25A	4000K	90	85
200W	12750lm/150W	4250lm/50W	1.67A	4000K	90	85
300W	17800lm/210W	7650lm/90W	2.50A	4000K	90	85
400W	25500lm/300W	8500lm/100W	3.33A	4000K	90	85
480W	28560lm/336W	12200lm/144W	4.00A	4000K	90	85

NOTE:

1. Lumen outputs for 120W, 135W, 150W, 200W, 300W, 400W and 480W are calculated.