

WET VRD VICKY RING LIGHT

Wet, Downward



The Vicky Ring Light is a unique ring style light with an LED light source. It is available in sizes ranging from 23.6" (dia.) up to 196.9" (dia.). The design features aluminum body construction. Available in downward light only, suitable for semi outdoor places with roofs or eaves.

TECHNICAL DATA

Wattage	32W, 50W, 65W, 80W, 110W, 140W, 170W, 220W, 280W
CCT	3000K, 3500K, 4000K, 5000K
Dimming	0-10V Dimming standard
CRI	90Ra
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	IP65


FEATURES

- Fixtures in diameters from 23.6" through 196.9".
- Direct illumination.
- Suitable for semi outdoor places with roofs or eaves.

SPECIFICATION

Dimension

Cable and wire cord length: 59" (1.5m)

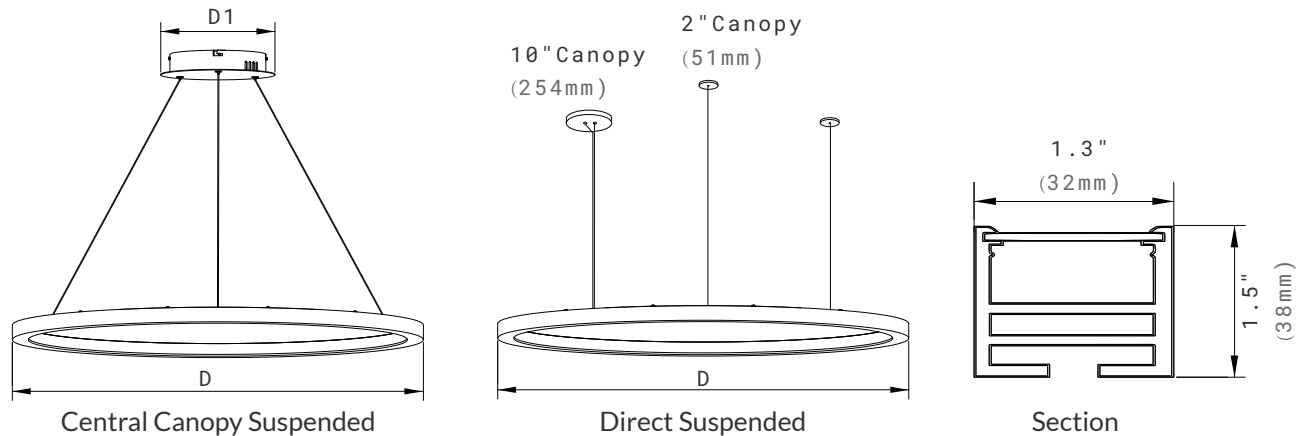

Central Canopy Suspended and Direct Suspended

Dimension		Driver Quantity	Section Quantity	Wattage
D	D1			
23.6"(600mm)	10.0"(250mm)	1	1	32W
35.4"(900mm)	10.0"(250mm)	1	1	50W
47.2"(1200mm)	10.0"(250mm)	2	1	65W
59.1"(1500mm)	10.0"(250mm)	2	1	80W
78.8"(2000mm)	14.0"(350mm)	3	3	110W
98.4"(2500mm)	14.0"(350mm)	4	4	140W
118.1"(3000mm)	18.0"(450mm)	5	5	170W
157.5"(4000mm)	20.0"(500mm)	6	6	220W
196.9"(5000mm)	20.0"(500mm)	12	6	280W

WET VRD VICKY RING LIGHT

Wet, Downward



ORDERING INFORMATION

EXAMPLE: VRD-IP65-3224-40901-ACPMK-WH

VR	D					
1. Series	2. Light Emitting	3. IP Rating	4. Wattage/ Diameter	5. CCT	6. CRI	7. Voltage
VR Vicky Ring	D Downward Light	IP65 IP65 Rated	3224 32W/Ø23.6" 5035 50W/Ø35.4" 6547 65W/Ø47.2" 8059 80W/Ø59.1" 11079 110W/Ø78.8" 14098 140W/Ø98.4" 170118 170W/Ø118.1" 220158 220W/Ø157.5" 280197 280W/Ø196.9"	30 3000K 35 3500K 40 4000K 50 5000K	90 90Ra	1 120V-277V
		8. Installation	9. Control	10. Frame Finish		
		ACPMK ¹ Central Canopy Aircraft Cable Suspended ¹ DPMK ¹ Direct Aircraft Cable Suspended ¹ SMK ¹ Surface Mounted ¹	BLANK 0-10V Dimming	WH ² White ²		

WET VRD VICKY RING LIGHT


Wet, Downward

NOTE:

- 1. Central canopy pendant is standard for 32W/50W/65W/80W. Direct suspended is standard for 110W/140W/170W/220W/280W.
 - 2. White finish is standard. Custom finish colors are available at an additional charge.
- Please contact Customer Service for premium options.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

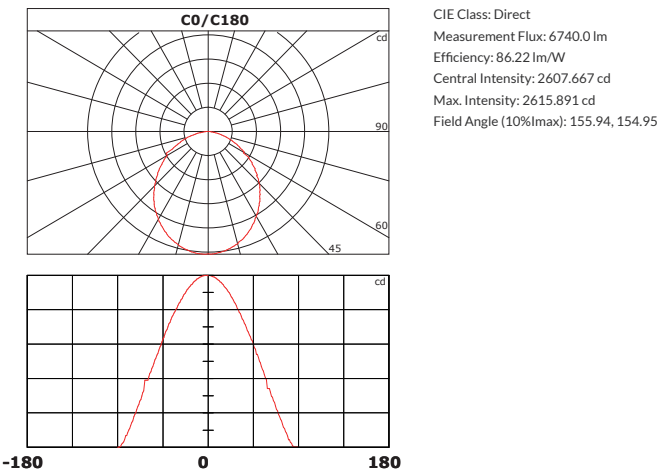

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	CCT	CRI	LPW
32W	2240lm	0.27A	3000K	90	70
50W	3400lm	0.42A	3000K	90	70
65W	4550lm	0.54A	3000K	90	70
80W	5800lm	0.67A	3000K	90	70
110W	8000lm	0.92A	3000K	90	70
140W	10000lm	1.17A	3000K	90	70
170W	13000lm	1.42A	3000K	90	70
220W	15400lm	1.83A	3000K	90	70
280W	21000lm	2.33A	3000K	90	70

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.