



The MIKI LED Bollard features a UV powder-coated, die-cast, high-quality aluminum body, tempered safety glass, a molded silicone gasket, and stainless steel screws. This bollard is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.

## TECHNICAL DATA


Wattage	10W
CRI	80
CCT	3000K, 4000K
Driver	Non-Dimming
Input Voltage	120-277V
Operating Temp.	-22°F to 104°F (-30°C to 40°C )
Certifications	cETL listed
	Suitable for wet location
	RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65

## FEATURES


- **Configurable & Glare Control:** 13" and 31.5" height bollards available. Features shielded 180° light distribution.
- **Premium Construction:** Die-cast aluminum body. Tempered safety glass. IP65-rated for wet locations.

## DIMENSION


Side View

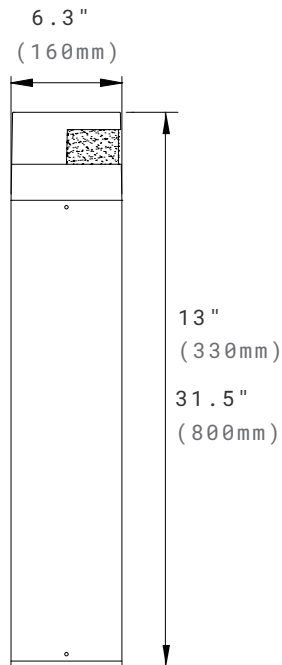

Base Plate

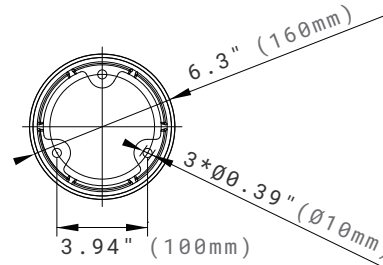

Anchor Bolts

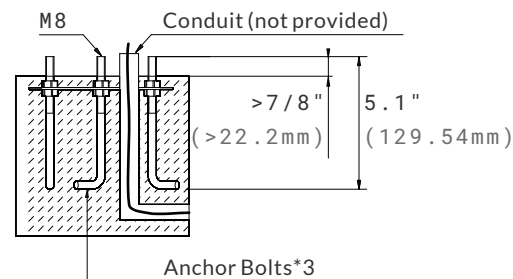

## PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	CRI	CCT
10W	550LM	0.08A	80	4000K

## ORDERING INFORMATION


EXAMPLE: MIBD32H-10401-III-BK

MIBD							
Series	Height	Wattage	CCT	Voltage	Control	Light Distribution	Finish
MIBD MIKI Bollard	13H <sup>1</sup> 13" Height <sup>1</sup>  32H <sup>1</sup> 31.5" Height <sup>1</sup>	10 10W	30 3000K  40 4000K	1 120-277V	BLANK On/Off	III Type III	BK <sup>2</sup> Black <sup>2</sup>

### NOTE:

1. The standard height is 32H(31.5"). The 13H version may require MOQ and extended lead times. Please contact Customer Service for specific requirements.
2. The standard color is black finish. Custom colors may be available for an additional charge—please contact Customer Service for details.

## ACCESSORIES (ORDERED SEPARATELY)

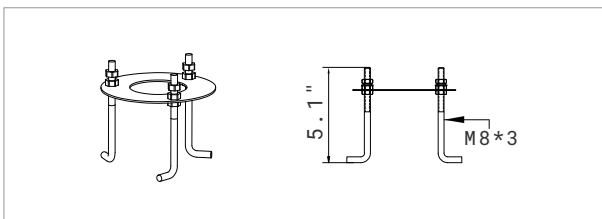

**91305**


**ABMK-MIBD**

Anchor Bolts Mounting Kits for MIKI Bollard.

## PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

### 10W - Type III

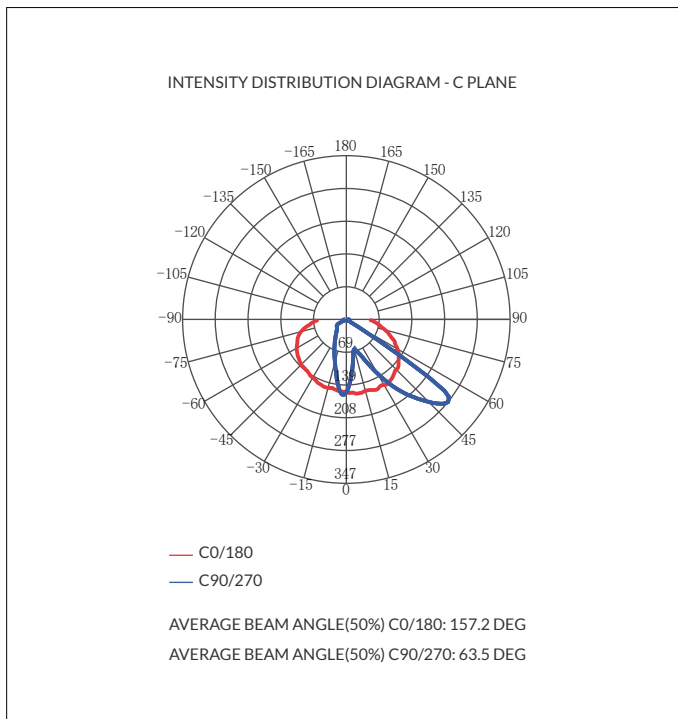

## BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
MIBDxxH_10301_III_BK	B0-U2-G1

## WARRANTY

5 years limited warranty.

Specifications subject to change without notice.