



The COPLBD Column LED Bollard features an elegant, slim column design that enhances any area with architectural style while improving pedestrian-scale comfort and security. Constructed with a high-quality aluminum body, polycarbonate diffuser, molded silicone gasket, and stainless steel screws, this bollard light offers durability and refined aesthetics. It is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.

TECHNICAL DATA

Wattage	50W
CRI	80
CCT	3000K, 4000K
Driver	0 - 10V Dimming
Input Voltage	120-277V, 50/60Hz
Operating Temp.	-40°F to 104°F (-40°C to 40°C)
Certifications	cETL listed
	Suitable for wet location
	RoHS compliant
Power Factor	>0.9 at 120Vac
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65


FEATURES

- **Versatile Application:** Ideal for a wide range of exterior spaces.
- **Premium Construction:** UV powder-coated die-cast aluminum body. Molded silicone gasket & stainless steel screws.


SPECIFICATION

Dimension

Side View

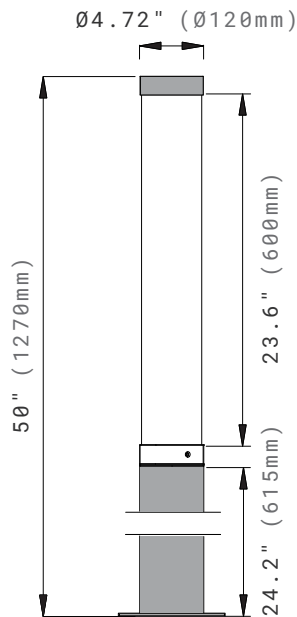

Base Plate

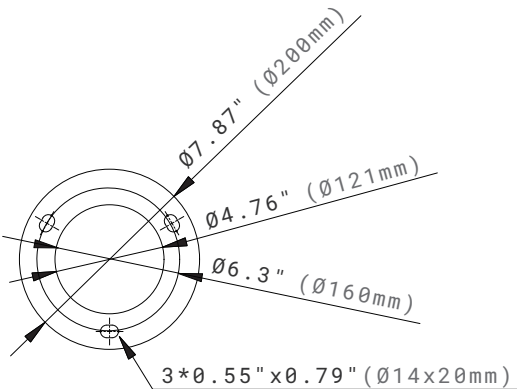


PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Tested Watts	Lumen Output	AC Input 120V	CRI	CCT	LPW
50W	48.9W	5240LM	0.42A	80	4000K	107

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

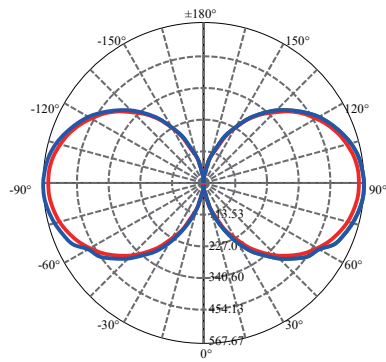

ORDERING INFORMATION


EXAMPLE: COPLBD-50H-24-50301-BK

COPLBD							
Series	Total Height	Diffuser Height	Wattage	CCT	Voltage	Control	Finish
COPLBD	50H 50"	24 23.6"	50 50W	30 3000K 40 4000K	1 120-277V	BLANK 0 - 10V Dimming	BK Black Optional Finish Colors ¹ Additional fees applied.

NOTE:

1. The standard color is black finish; Custom finish colors are available at an additional charge. Please contact Customer Service for details.

ACCESSORIES (ORDERED SEPARATELY)



ABMK-COPLBD
Anchor Bolts Mounting Kits.

BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
COPLBD_50H_24_50301	B2-U5-G3

WARRANTY

5 years limited warranty.
Specifications subject to change without notice.