

DONUT LED BOLLARD

Ground Stake Mount



**DARKSKY
APPROVED**
Reduces Light pollution
Certified by DarkSky.org

The Donut LED Bollard features a sleek, slim design with fully shielded light distribution. Constructed with UV powder-coated, die-cast aluminum housing, a molded silicone gasket, and stainless steel screws, this bollard is an excellent choice for walkways, entrances, plazas, court-yards, driveways, bridges, and landscaped areas.


TECHNICAL DATA

Wattage	14W, 20W, 30W
CRI	80
CCT	3000K, 4000K
	3000K-DarkSky Approved
Driver	0-10V Dimming
Input Voltage	120-277V, 50/60Hz
Operating Temp.	-40°F to 104°F(-40°C to 40°C)
Certifications	cETL listed
	Suitable for wet location
	RoHS compliant
	DarkSky Approved for CCT of
	3000K and below
Power Factor	>0.9 at 120Vac
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65

FEATURES

- **Optimized Visual Comfort:** Shielded light distribution.
- **Versatile Application:** Ideal for a wide range of exterior spaces.
- **Premium Construction:** UV powder-coated die-cast aluminum body. Molded silicone gasket & stainless steel screws.

DIMENSION

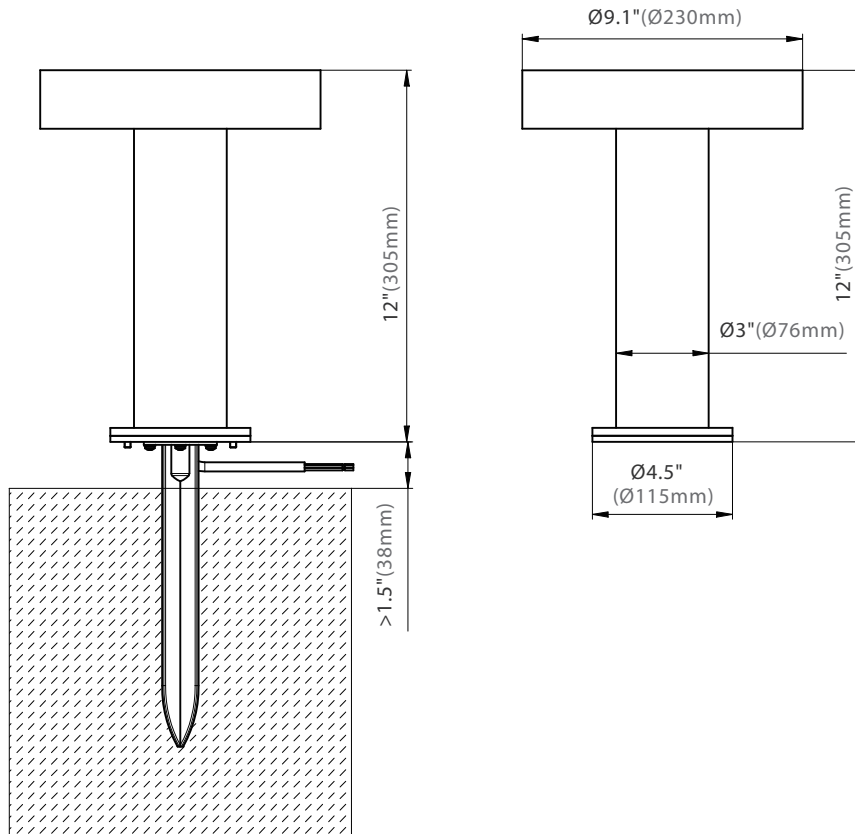

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	CRI	CCT
14W	1100lm	0.12A	80	4000K
20W	1580lm	0.17A	80	4000K
30W	2100lm	0.25A	80	4000K

ORDERING INFORMATION

Standard Model

EXAMPLE: DOBD12H-20401-BK-GS

DOBD							
Series	Height	Wattage	CCT	Voltage	Control	Finish	Installation
DOBD Donut Bollard	12H 12" Height	14 14W 20 20W 30 30W	30 3000K 40 4000K	1 120-277V	BLANK 0-10V Dimming Driver	BK Black Custom Finish Colors¹ <i>Additional fees applied.</i>	GS Ground Stake ²

NOTE:

1. The standard finish color is black. Custom finish colors are available at an additional charge. Please contact Customer Service for premium adder.
2. The ground stake needs to be ordered separately.

DarkSky-Approved Model


EXAMPLE: DOBD12H-20301-BK-GS

DOBD							
Series	Height	Wattage	CCT	Voltage	Control	Finish	Installation
DOBD Donut Bollard	12H 12" Height	14 14W 20 20W 30 30W	30 3000K	1 120-277V	BLANK 0-10V Dimming Driver	BK Black Custom Finish Colors¹ <i>Additional fees applied.</i>	GS Ground Stake ²

NOTE:

1. The standard finish color is black. Custom finish colors are available at an additional charge. Please contact Customer Service for premium adder.
2. The ground stake needs to be ordered separately.

ACCESSORIES (ORDERED SEPARATELY)




HOFL-GDSK-AL
Aluminum Ground stake
Max loading ≤10kg
Incapable in corrosive area

Ref#: 20251021

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

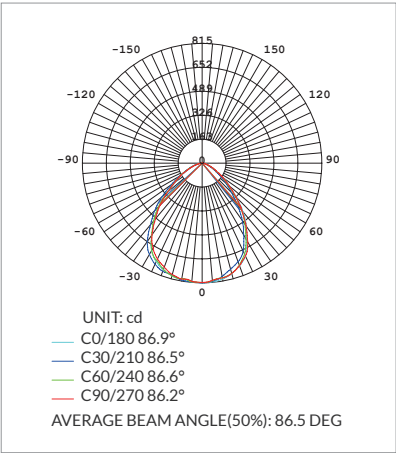

BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
DOBDXXH-14401	B1-U0-G0
DOBDXXH-20401	B1-U0-G0
DOBDXXH-30401	B1-U0-G0

WARRANTY

5 years limited warranty.
Specifications subject to change without notice.