



The MASK LED Bollard features a rectangular square shape with an artistically sloping top. The shielded, recessed light source tightly defines its downward and forward light throw. Constructed with superior UV powder coating, quality die cast aluminum body, tempered safety glass lens, molded silicone gasket and stainless steel screws. This bollard is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.

TECHNICAL DATA

Wattage	10W
CCT	3000K, 4000K
Driver	Non-Dimming
CRI	80
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-30°C to 40°C (-22°F to 104°F)
Certifications	cETLus RoHS compliant
Power Factor	>0.9 @120Vac
Harmonic Distortion	<20% at full load
IP Rating	IP65


FEATURES

- Square shape with beveled top.
- Die cast aluminum body.
- Shielded light distribution.
- IP65 rated for wet location.


SPECIFICATION

Dimension

Side View

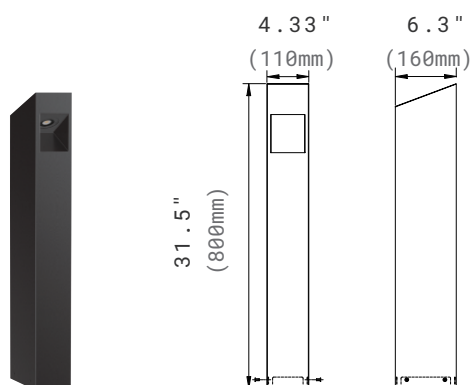

Base Plate

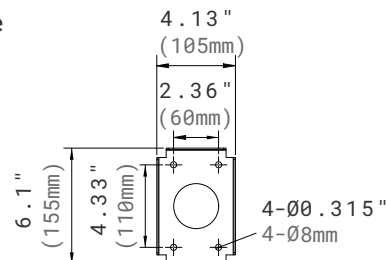

ORDERING INFORMATION


EXAMPLE: MASKBD32H-10401-BK

MASKBD						
Series	Height	Wattage	CCT	Voltage	Controls	Finish
MASKBD	32H 31.5" Height	10 10W	30 3000K 40 4000K	1 120-277V	Blank On/Off	BK Black Optional Finish Colors (Additional Charge applied) ¹

NOTE:

1. Black finish is standard. Optional finish color is available at an additional charge.


ACCESSORIES (ORDERED SEPARATELY)

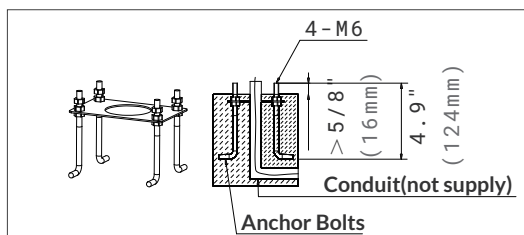

91809
ABMK-MASKBD
Anchor Bolts Mounting Kits.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

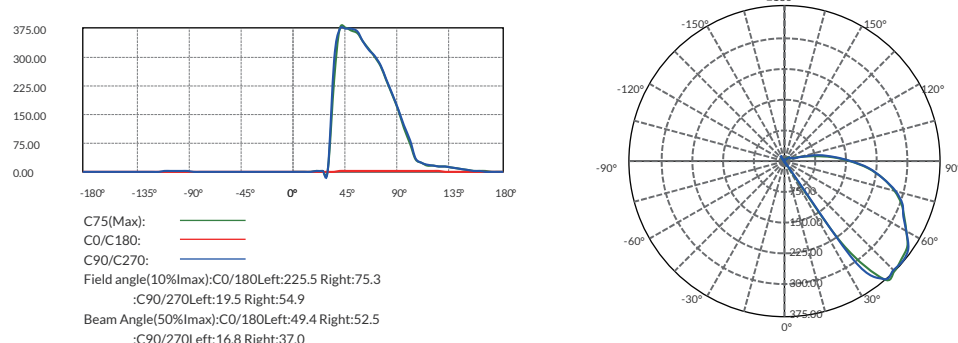

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	CRI	CCT
10W	600lm	0.08A	80	3000K

BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
MASKBD_XXH_10301_BK_CRI90	B0-U2-G1

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.