



Intertek



WET LOCATION



RoHS  
COMPLIANCE



LIMITED WARRANTY  
5  
YEAR



**DARKSKY  
APPROVED**  
Reduces Light pollution  
Certified by DarkSky.org

The Pillar Round LED bollard features a UV powder-coated, die-cast high-quality aluminum body with a molded silicone gasket and stainless steel screws. It offers selectable wattage and CCT. This bollard is an excellent choice for entrances, walkways, driveways, promenades, courtyards, bridges, plazas, and landscaped areas.

## TECHNICAL DATA

Wattage	10W, 20W
CRI	80
CCT	3000K, 4000K
Driver	Non-Dimming
	0-10V Dimming (not available for 10W)
Input Voltage	120-277V
Operating Temp.	-40°F to 104°F (-40°C to 40°C)
Certifications	cETL listed
	Suitable for wet location
	RoHS compliant
	DarkSky Approved for CCT of
	3000K and below
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65



## FEATURES

- **Versatile Application:** Ideal for a wide range of exterior spaces.
- **Premium Construction:** UV powder-coated die-cast aluminum body. Molded silicone gasket & stainless steel screws.


## SPECIFICATION

### Dimension

#### Side View

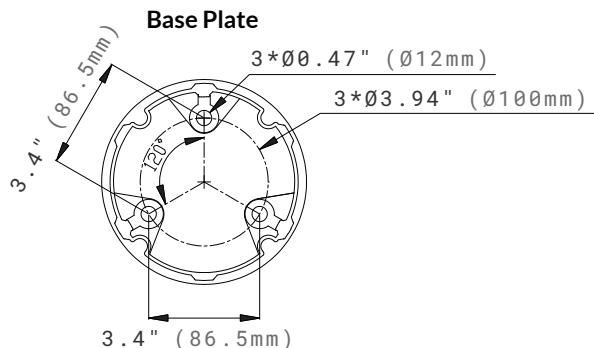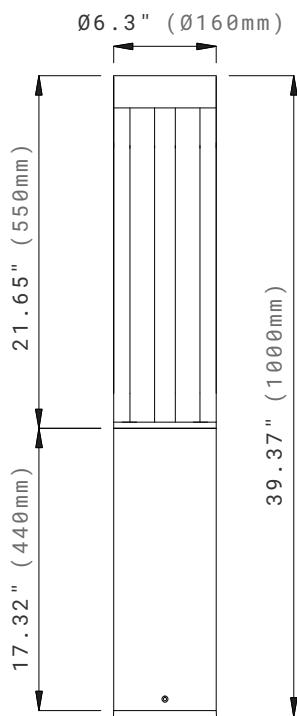

#### Anchor Bolts

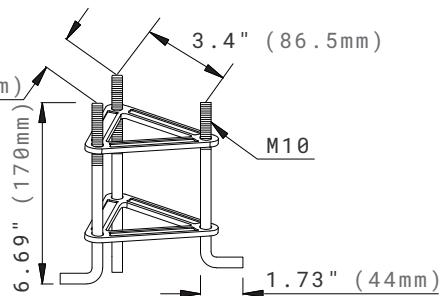

## PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	CRI	CCT
10W	520LM	0.09A	80	4000K
20W	1700LM	0.18A	80	4000K

## ORDERING INFORMATION


EXAMPLE: PRBD40H-20401-BK

PRBD							
Series	Height	Wattage	CCT	Voltage	Control	Finish	Options
PRBD Pillar Round Bollard	40H 39.4" Height	10 10W 20 20W	30 3000K 40 4000K	1 120-277V	BLANK On/Off	BK Black <b>Optional Finish Colors<sup>1</sup></b> Custom Colors <sup>1</sup> <i>Additional fees applied.</i>	BLANK Non-Dimming <b>D<sup>2</sup></b> 0-10V Dimming Driver <i>Not available for 10W.<sup>2</sup></i>

### NOTE:

1. The standard color is black finish; custom colors are available for an additional charge - please contact customer service for premium options.
2. 0-10V dimming driver is not available for 10W.

## ACCESSORIES (ORDERED SEPARATELY)




**91306**  
**ABMK-PRBD**  
 Anchor Bolts Mounting Kits  
 for Pillar Round Bollard.

## PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

Ref#: 20251126

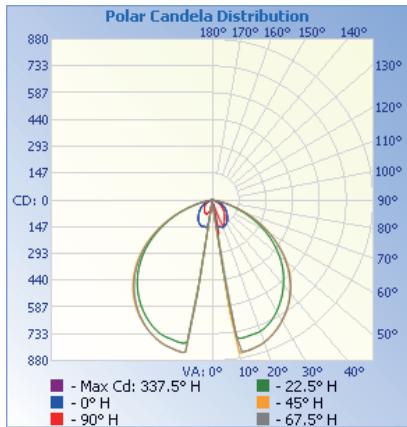

## BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
PRBD-10301-BK	B0-U1-G0
PRBD-20301-BK	B1-U1-G0

## WARRANTY

5 years limited warranty.

Specifications subject to change without notice.