



The Venus LED Bollard has single or twins heads in sleek and slim shape. It has fully shielded light distribution. This bollard has UV powder coated die cast high quality aluminum body, tempered safety glass, moulded silicone gasket and stainless steel screws. This bollard is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.

TECHNICAL DATA

Wattage	10W Single head
	20W Twins head
CCT	3000K, 4000K
Driver	Non-Dimming
CRI	80
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-22°F to 104°F (-30°C to 40°C)
Certifications	cETL listed
	RoHS compliant
	Suitable for wet location
Power Factor	>0.9 @120Vac
Harmonic Distortion	<20%
IP Rating	IP65 rated



Single Head: 10W



Twins Head: 20W

FEATURES


- Die cast aluminum body.
- Tempered safety glass.
- Single or twins heads.
- Fully shielded light distribution.
- IP65 rated for wet location.

SPECIFICATION


Dimension

Side View


Single Head: 10W

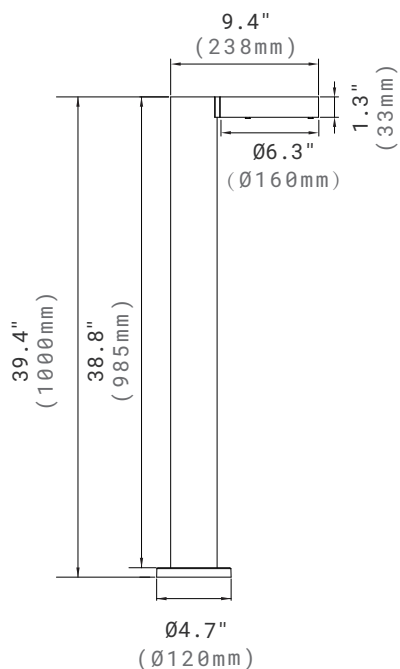


Twins Head: 20W

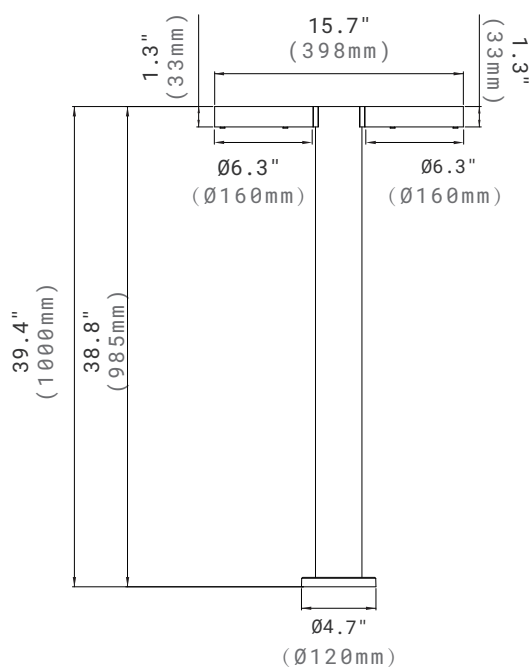

Base Plate

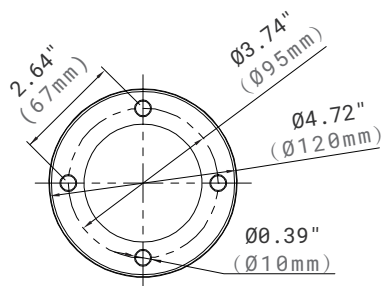

Anchor Bolts

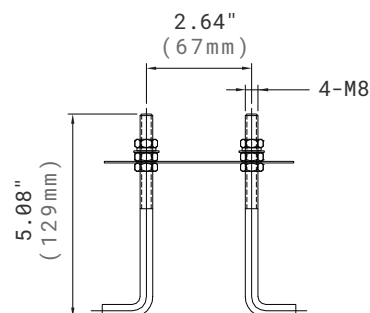

ORDERING INFORMATION

EXAMPLE: VSBD40H-10401-BK

VSBD						
Name	Height	Wattage	CCT	Voltage	Controls	Finish
VSBD Venus Bollard	40H 39.4" Height	10 10W Single Head 20 20W Twins Head	30 3000K 40 4000K	1 120-277V	BLANK On/Off	BK ¹ Black ¹

NOTE:

1. Black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.


ACCESSORIES (ORDERED SEPARATELY)




91415
ABMK-VSBD
Anchor Bolts Mounting Kits.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

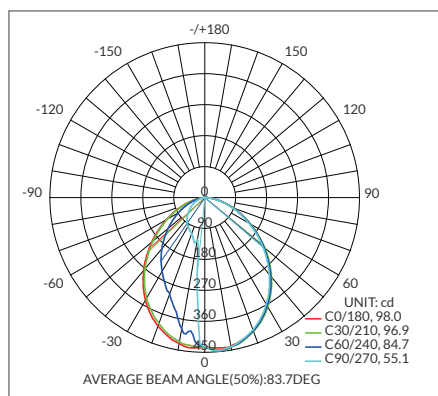

Single Head

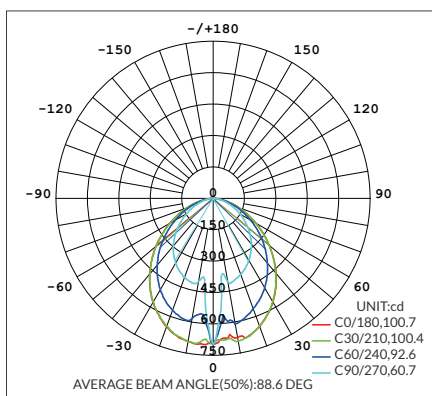

Twins Head

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Lumen Output

Wattage	Lumen Output	AC Input 120V	CRI	CCT
10W	900lm	0.08A	80	4000K
20W	1700lm	0.17A	80	4000K

BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
VSBDXXH-10301-BK	B1-U0-G0
VSBDXXH-20301-BK	B1-U0-G1

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.