



The Carlo LED Pole Light combines unmatched flexibility with resilient durability for dynamic outdoor lighting solutions. Its fully customizable pole height and finish color allow seamless integration into any setting, while the luminaire's selection of beam angles and versatile mounting methods enable tailored illumination for diverse applications—from pathways and parking lots to architectural landscapes.

TECHNICAL DATA

Wattage	Single luminaire
	20W, 30W, 40W
CCT	2700K, 3000K, 4000K, 5000K
Beam Angle	15°, 24°, 36°, 50°, H50°*V20°
CRI	80
Driver	0-10V Dimming
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 hours
Operating Temp.	-4°F to 113°F (-20°C to 45°C)
Certifications	cETLus listed
	RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	65


FEATURES

- **Adjustability & Adaptability:** Customizable pole height and finish color. Selection of beam angles and mountings. 180° tiltable luminaire.
- **Durable Construction:** Die-cast aluminum housing. Polycarbonate Lens. Marine grade treatment available.
- **Smart Compatibility:** 0-10V dimming for enhanced control.
- **Visual Comfort Optimization:** Optional shrouds and honeycomb louvre for visual comfort.

SPECIFICATION

Dimension


20W, 30W, 40W

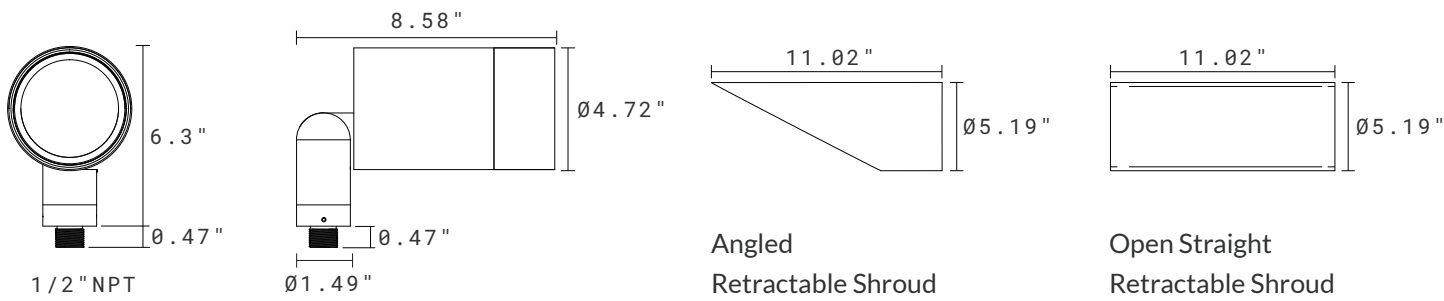


Shrouds



No Shroud



Angled Retractable Shroud



Open Straight Retractable Shroud

Housing Color



Black
RAL9011




White
RAL9016



Gray
RAL7012



Mineral
Bronze



Silver
RAL9006

ORDERING INFORMATION


EXAMPLE: CARLO-C20301-50-KNS-AS-BK-1.8FT

CARLO									
Series	Wattage	CCT	Voltage	Beam Angle	Mounting	Shroud	Housing Color	Cable Length	Option
CARLO	C20 COB 20W	27 2700K	1 120-277V	15 15°	KNS Knuckle with 1/2 threaded Stem	NS No shroud	BK¹ Black RAL9011 <i>Black is the standard housing color. Custom colors are available at an additional charge.</i> WH White RAL9016 GY Gray RAL7012 BZ Mineral Bronze SL Silver RAL9006	1.8FT² <i>1.8ft cable is the standard cable length. Custom lengths are available at an additional charge.</i>	BLANK None
	C30 COB 30W	30 3000K		24 24°		AS Angled Retractable Shroud			M Marine ambient corrosion resistance
	C40 COB 40W	40 4000K		36 36°		OS Open Straight Retractable Shroud			
		50 5000K		50 50° 5020 H50° *V20°					

NOTE:


1. The standard finish color is black. Custom colors are available at an additional charge.
2. The standard cable length is 1.8ft. Custom cable lengths are available at an additional charge.

ACCESSORIES (ORDERED SEPARATELY)

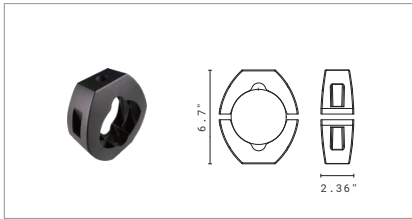


HOFL-PCP-4-BK

Pole Clamp for 1 or 2 fixtures,
Pole Dia. 3.7"~3.9".

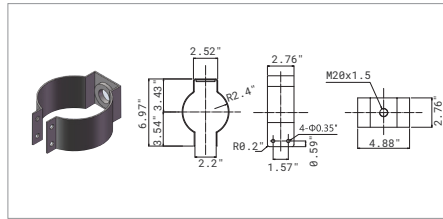

HOFL-PCP-5-BK

Pole Clamp for 1 fixture, black.
Pole Dia. 4.72"~5.12".

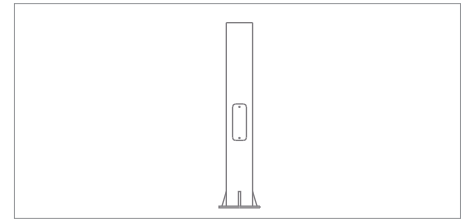

CARLO-12FTPOLE-4-BK

12ft pole, Dia. 4", Black.

CARLO-14FTPOLE-4-BK

14ft pole, Dia. 4", Black.

CARLO-16FTPOLE-4-BK

16ft pole, Dia. 4", Black.

CARLO-18FTPOLE-4-BK

18ft pole, Dia. 4", Black.

CARLO-12FTPOLE-5-BK

12ft pole, Dia. 5", Black.

CARLO-14FTPOLE-5-BK

14ft pole, Dia. 5", Black.


CARLO-16FTPOLE-5-BK

16ft pole, Dia. 5", Black.

CARLO-18FTPOLE-5-BK


18ft pole, Dia. 5", Black.

*Custom pole heights and finish colors
available.*

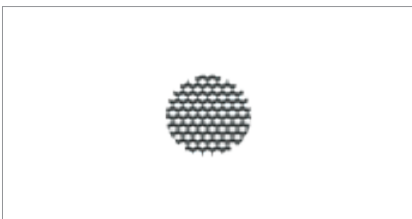

CARLO-HCL-04

Aluminum Honeycomb Louver.

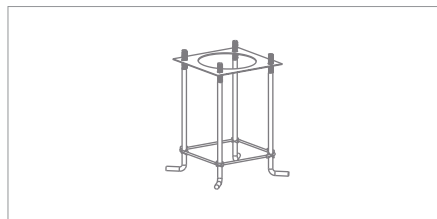

ABMK-CARLO-14T18FT


Anchor Bolts Mounting Kit for 14ft to
18ft pole light.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.


40W- 15°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



AVERAGE BEAM ANGLE(50%):17.8 DEG

CO PLANE ISOLUX DIAGRAM (UNIT:lx)

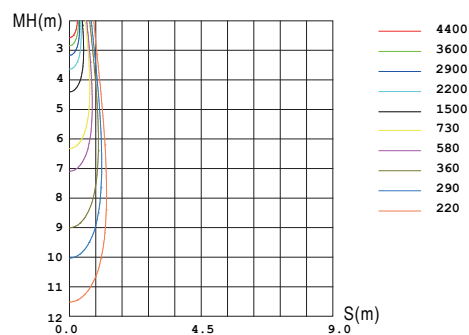


PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.


40W- 24°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




AVERAGE BEAM ANGLE(50%):24.3 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

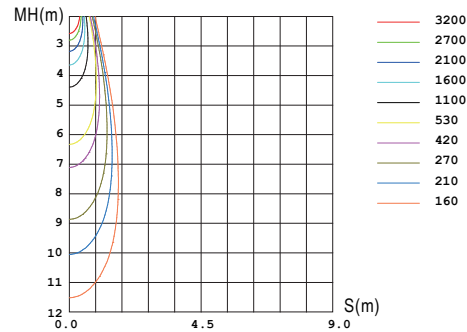


40W- 36°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




AVERAGE BEAM ANGLE(50%):36.9 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

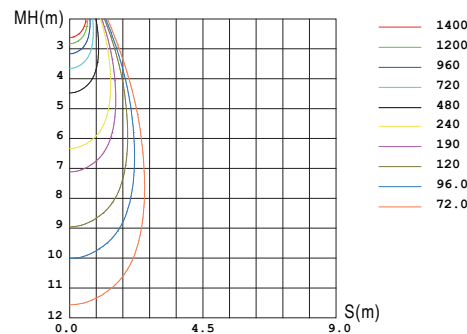


40W- 50°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



AVERAGE BEAM ANGLE(50%):53.6 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

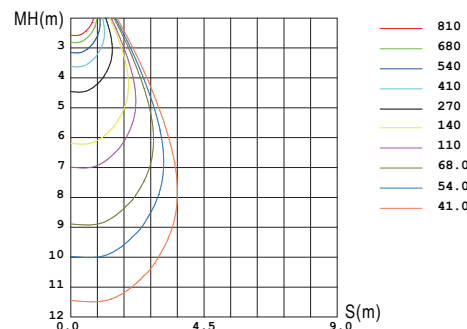


PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.


40W- H50°xV20°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



AVERAGE BEAM ANGLE(50%):28.7 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

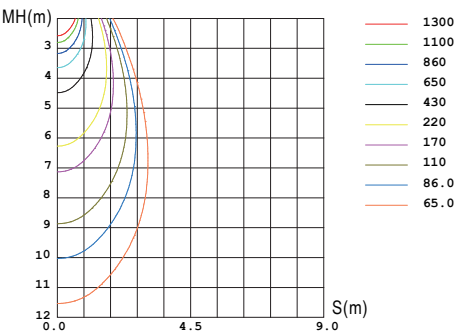

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

WATTAGE	BEAM ANGLE	LUMENS (lm)	CCT	CRI
20W	15°	2520lm	3000K	80
20W	24°	2161lm	3000K	80
20W	36°	2114lm	3000K	80
20W	50°	2131lm	3000K	80
20W	H50° x V20°	1608lm	3000K	80
30W	15°	2785lm	3000K	80
30W	24°	2936lm	3000K	80
30W	36°	2863lm	3000K	80
30W	50°	2936lm	3000K	80
30W	H50° x V20°	2159lm	3000K	80
40W	15°	3671lm	3000K	80
40W	24°	3958lm	3000K	80
40W	36°	3878lm	3000K	80
40W	50°	3924lm	3000K	80
40W	H50° x V20°	2878lm	3000K	80

WARRANTY

Five year limited warranty.

Specifications subject to change without notice.