



The Holly LED Pole Light combines unmatched flexibility with resilient durability for dynamic outdoor lighting solutions. Its fully customizable pole height and finish color allow seamless integration into any setting, while the luminaire's selection of beam angles and versatile mounting methods enable tailored illumination for diverse applications—from pathways and parking lots to architectural landscapes.

TECHNICAL DATA


Wattage	Single luminaire 26W, 42W, 86W, 120W
CCT	2700K, 3000K, 4000K, 5000K
Beam Angle	5°, 15°, 24°, 36°, 50°
CRI	80
Driver	0-10V Dimming
Input Voltage	120-277V
Projected Lifetime	L70-100,000 hours
Operating Temperature	
C26	-4°F to 104°F (-20°C to 40°C)
C42/C86/C120	-40°F to 104°F (-40°C to 40°C)
Certifications	cETLus listed
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	65

FEATURES

- Adjustability & Adaptability:** Customizable pole height and finish color. Selection of beam angles and mountings. 90° tiltable luminaire.
- Durable Construction:** Die-cast aluminum housing. Akzo-Nobel powder coating. Marine grade treatment available.
- Smart Compatibility:** 0-10V dimming for enhanced control.
- Visual Comfort Optimization:** Optional full visor and honeycomb louvre for visual comfort.

SPECIFICATION

Knuckle with 1/2" Threaded Stem

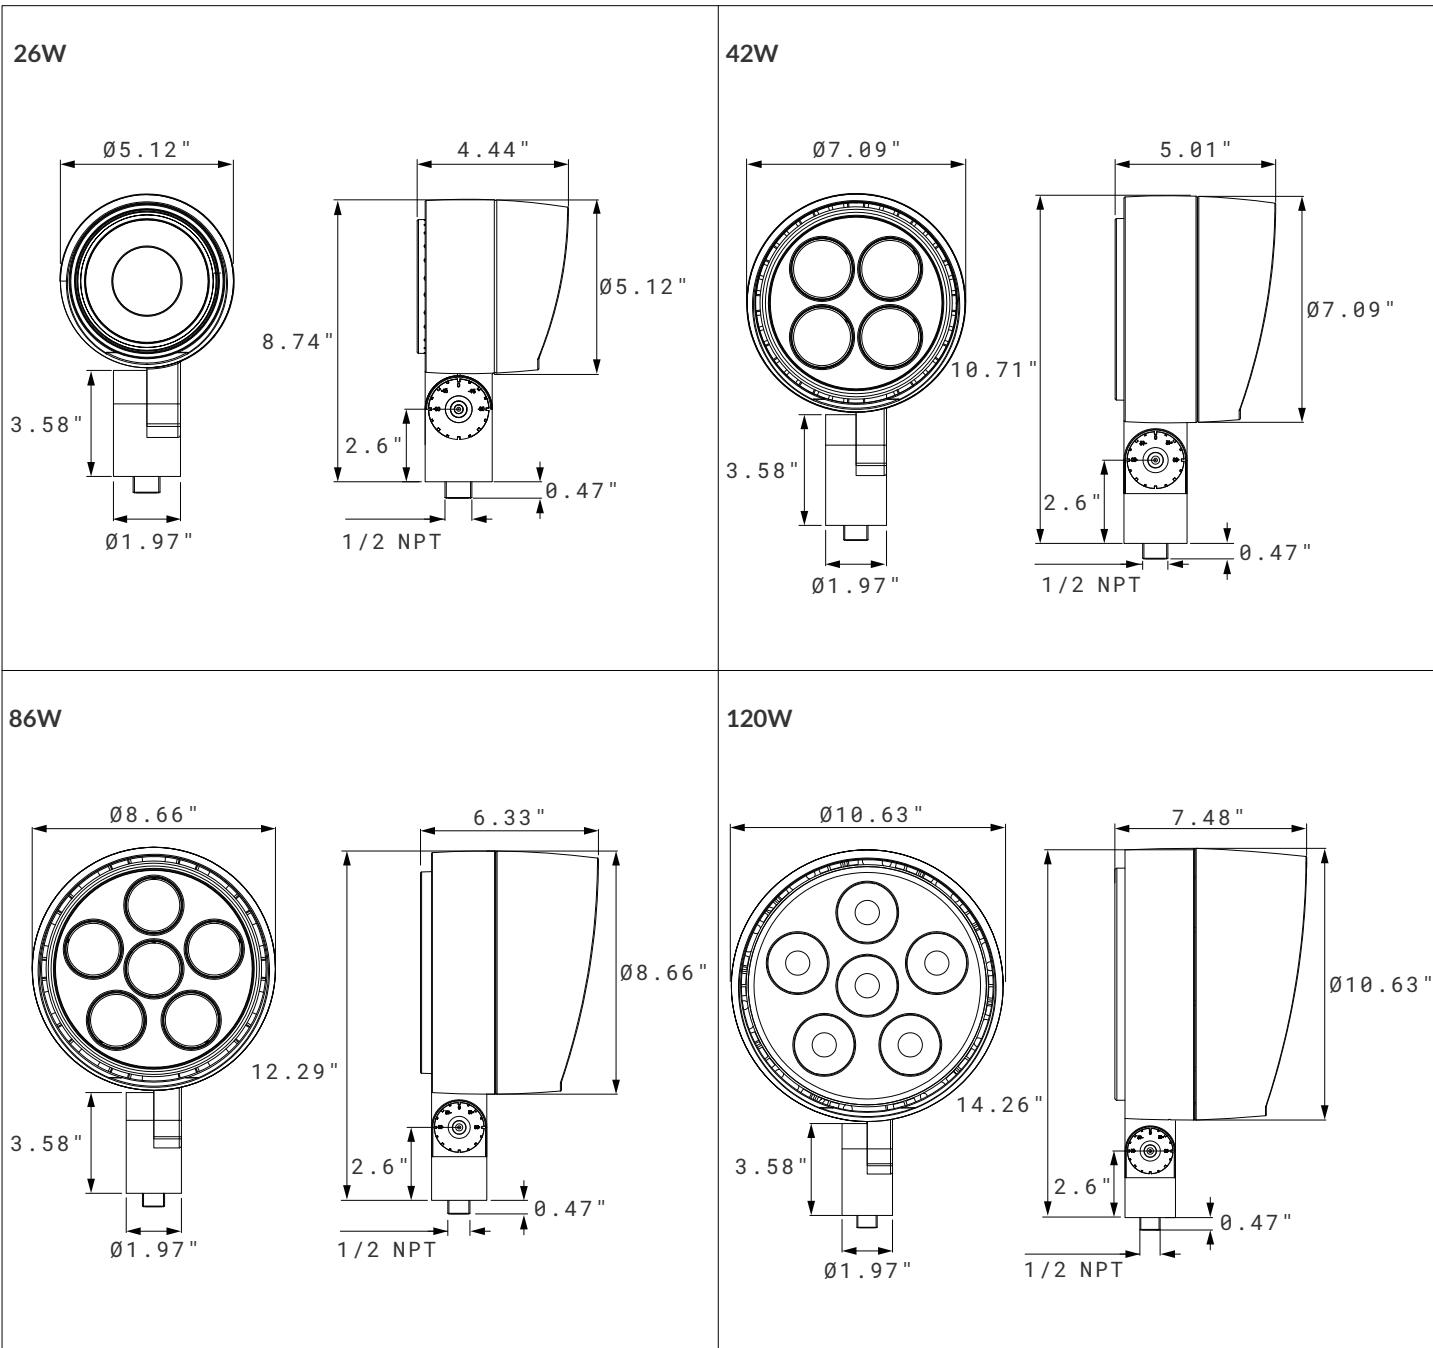

ORDERING INFORMATION

EXAMPLE: HOFL-C26301-24-KNS-BK-1.8FT

HOFL								
Series	Wattage	CCT	Voltage	Beam Angle	Mounting	Faceplate Finish	Cable Length	Option
HOFL	C26	27	1	5	KNS	BK¹	1.8FT ²	BLANK
	26W	2700K	120-277V	5°	Knuckle with 1/2 Threaded Stem	Black RAL9011 <i>*Black is standard finish color.</i>	<i>*1.8 FT cable is standard.</i>	None
	C42	30		15		Other finish colors are available at an additional charge.	Other cable lengths are available at an additional charge.	M
	42W	3000K		15°				Marine ambient corrosion resistance
	C86	40		24				
	86W	4000K		24°				
	C120	50		36		WH		
	120W	5000K		36°		White RAL9016		
				50		GY		
				50°		Gray RAL7012		
						BZ		
						Mineral bronze		
						SL		
						Silver RAL9006		


NOTE:

1. Black finish is standard. Custom color is available at an additional charge.
2. Standard cable length is 1.8ft. Other cable lengths are available at an additional charge.

Housing Color



Black RAL9011



White RAL9016



Gray RAL7012




Mineral bronze




Silver RAL9006

ACCESSORIES (ORDERED SEPARATELY)

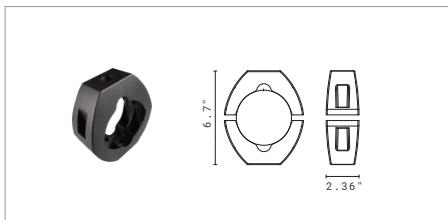


HOFL-PCP-4-BK

Pole Clamp for one or two fixtures,
Pole Dia. 3.7"~3.9".

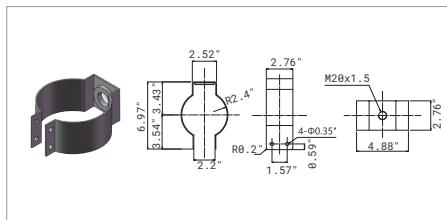

HOFL-PCP-5-BK

Pole Clamp for 1 fixture, Black.
Pole Dia. 4.72"~5.12".

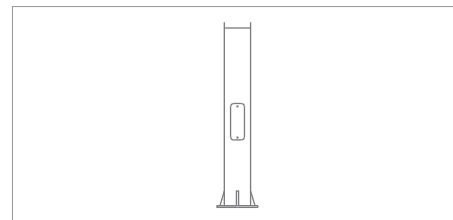

CARLO-12FTPOLE-4-BK

12ft pole, Dia. 4", Black.

CARLO-14FTPOLE-4-BK

14ft pole, Dia. 4", Black.

CARLO-16FTPOLE-4-BK

16ft pole, Dia. 4", Black.

CARLO-18FTPOLE-4-BK

18ft pole, Dia. 4", Black.

CARLO-12FTPOLE-5-BK

12ft pole, Dia. 5", Black.

CARLO-14FTPOLE-5-BK

14ft pole, Dia. 5", Black.

CARLO-16FTPOLE-5-BK

16ft pole, Dia. 5", Black.

CARLO-18FTPOLE-5-BK

18ft pole, Dia. 5", Black.

Custom pole heights and finish colors available.



ABMK-HOFL-14T18FT

Anchor Bolts mounting kit for 14ft to
18ft pole light.



HOFL-FV-26

Full Visor for C26, Dia 5.31" x 3.94".

HOFL-FV-42


Full Visor for C42, Dia 7.28" x 5.12".

HOFL-FV-86

Full Visor for C86, Dia 8.86" x 6.3".

HOFL-FV-120

Full Visor for C120, Dia 10.83" x 7.48".

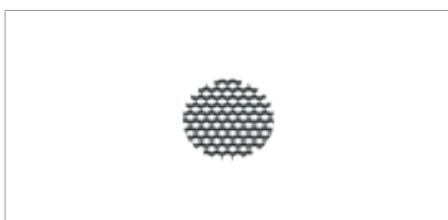

HOFL-HCL-50

Aluminum Honeycomb Louver,
Dia 1.97" for C26/C42/C86.

HOFL-HCL-62


Aluminum Honeycomb Louver,
Dia 2.44" for C120.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.


Ref#: 20251216

5°-3000K




H(m)	ø(m)	Ix(MAX)
2	0.21	19135
4	0.42	4784
6	0.64	2126
8	0.85	1196

36°-3000K




H(m)	ø(m)	Ix(MAX)
2	1.40	2454
4	2.80	613
6	4.18	272
8	5.58	153

15°-3000K




H(m)	ø(m)	Ix(MAX)
2	0.57	7254
4	1.15	1814
6	1.73	806
8	2.30	453

50°-3000K



H(m)	ø(m)	Ix(MAX)
2	1.77	1410
4	3.54	352
6	5.31	156
8	7.08	88

24°-3000K



H(m)	ø(m)	Ix(MAX)
2	0.77	5081
4	1.55	1270
6	2.33	564
8	3.11	318

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESN ALM-79-08 as well as Lighting Facts listed.

WATTAGE	LUMENS (lm)	BEAM ANGLE	CCT	CRI
26W	2200 lm	15° / 24° / 36° / 50°	3000K	80
42W	4000 lm	15° / 24° / 36° / 50°	3000K	80
86W	7300 lm	15° / 24° / 36° / 50°	3000K	80
120W	10000 lm	15° / 24° / 36° / 50°	3000K	80

*Apply lumen multiplier 0.6 for beam angle of 5°.

WARRANTY

Five year limited warranty.

Specifications subject to change without notice.