


POST TOP
SAFETY INSTRUCTION


READ CAREFULLY BEFORE INSTALLING FIXTURE. PLEASE KEEP THIS MANUAL FOR FUTURE USE.
Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

MAKE CERTAIN POWER IS OFF BEFORE INSTALLING OR MAINTAINING FIXTURE.


CHECK THAT VOLTAGE IS COMPATIBLE WITH FIXTURE DRIVER. USE APPROVED CONNECTORS FOR ALL ELECTRICAL CONNECTIONS.

MAINTENANCE CAUTION


1. Review the wire connection before beginning, and make sure fixture is grounded properly.
2. For lighting controls, follow control instructions carefully.
3. Turn power off and wait for fixture to cool before performing maintenance.
4. Maintenance must be done by professionals.

WIRE CONNECTION

Universal voltage driver permits operation at 120VAC thru 277VAC or 347VAC, 50 or 60 Hz.

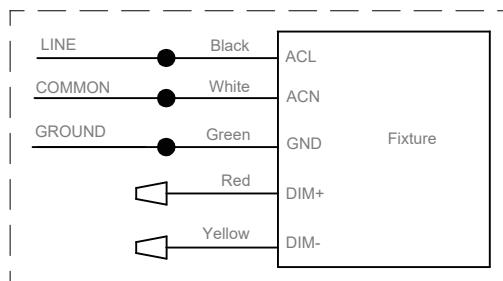

Make the following Electrical Connection:

- a). Connect the voltage supply line to ACL in Black.
- b). Connect the voltage supply Neutral to ACN in White.
- c). Connect Green ground lead to the supply ground lead.
- d). If 0-10V Dimming is used, connect the supply negative dimming lead to our 0-10V (Dim-) Wire.
- e). If 0-10V Dimming is used, connect the supply positive dimming lead to our 0-10V (Dim+) Wire.

INSTALLATION— SLIP FITTER
ACCESSORY PACK

WIRE NUT x 5

Post Top Mount

1. The fixture fits a $\Phi 3"$ O.D. Tenon or Pole.
2. Take out the fixture from the package. Loosen the three set screws on the tenon adapter.
3. Use wire terminals to connect the wires according to the wiring diagram. Place both the wire terminals and cord into the pole.
4. Slip the tenon adapter over a tenon or pole, then secure the fixture with the set screws (3).

Ref#: 20251231

